

LUMINEX®

osvětlení – licht – lighting

založeno 1991

Sídlo firmy

LUMINEX s.r.o.

Petra Rezka 10/1203
140 00 Praha 4

Internet: firma.luminex.cz
E-mail: info@luminex.cz

Telefon: 261 090 952

Pracovní doba: Po – Pá 8:00 – 16:30

e-Shop

www.luminex.cz

Regionální zastoupení

Miroslav Patočka – jednatel společnosti

E-mail: miroslav.patočka@luminex.cz

Ing. Martin Urban – reprezentant pro Prahu

Mobil: 777 570 563

E-mail: martin.urban@luminex.cz

Roman Polásek – reprezentant pro východní a severní Čechy, Moravu

Mobil: 777 730 262

E-mail: roman.polasek@luminex.cz

David Martínek – reprezentant pro západní, jižní a střední Čechy

Mobil: 777 730 266

E-mail: david.martinek@luminex.cz

Jan Polakov – reprezentant pro markety Morava, Vysočina

Mobil: 777 730 264

E-mail: ozm@luminex.cz

TECNICO

2020|21

TECHNICAL LIGHT FOR
DAILY BUSINESS

MOLTO LUCE®


DELIVERY TIMES

The assortment of this catalogue has been compiled especially for your „Daily Business“. Products, that can be used on daily basis in projects, should therefore be available quickly.

Molto Luce meets this demand for delivery capability with a high degree of flexibility in procurement management.

We keep a large part of the products in this catalogue on stock. These articles are marked with a 🍏. All other products are delivered within a maximum of 3 weeks from order date.

CIRCINA



LED
350mA

INFO	POWER	mA	LUMEN	CRI	LED	Ø	ID	⌚ Ø	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, matt powder-coated with fine textured paint, 30° tilting, recessed light source, 24° beam angle, excl. converter	LED 9W	350	930	>80	3000K	90	74	83			305-1419050	69,00	
	LED 9W	350	930	>80	3000K	90	74	83			305-1419060	69,00	
	LED 9W	350	930	>80	3000K	90	74	83			305-14190140	69,00	

PRICES AND TERMS OF DELIVERY AND SALE

All prices in this catalogue are gross excl. VAT. With the publication of this catalogue all previous prices lose their validity. We deliver exclusively according to our valid delivery and sales conditions. The goods remain the property of Molto Luce GmbH until full payment has been made. Our general terms and conditions apply, available on www.moltoluce.com.

DISCLAIMER AND RIGHT OF USE

All data in this catalogue has purely informative value. Molto Luce GmbH reserves the right to modify the data without prior notice or justification. All measurements are to be checked in nature. In addition, some products shown in the catalogue are picture retouchings or renderings which serve exclusively to illustrate the application possibilities. Molto Luce GmbH accepts no liability for possible errors, typesetting or printing errors or colour deviations. Contents and pictures from this catalogue may not be edited, reproduced or published without the consent of Molto Luce GmbH.

MOLTO LUCE - A LEAD COMPANY

Molto Luce carries the quality mark of the leading Austrian companies. It is awarded to companies that do not rely on short-term profits, but on sustainable corporate success, companies that contribute to the development of the region and industry through market and value orientation.
















www.leitbetriebe.at



MOLTO LUCE - TOP SUPPLIER RETAIL 2019

Molto Luce was awarded the Top Supplier Retail Award 2019 in the category „Pilot stores with exemplary energy efficiency/sustainability“ as solution partner of the EHI Energy Management Award winner Metro Cash & Carry Austria GmbH.



	CEILING RECESSED			INDOOR LUMINAIRES	SPOTLIGHTS LUMINAIRES	P. 008-039 P. 056-059	DOWNLIGHTS PROFILES	P. 040-055 P. 060-061
	SURFACE-MOUNTED				SPOTLIGHTS PENDANTS	P. 064-084 P. 092-097	LUMINAIRES PROFILES	P. 085-091 P. 098-103
	RECESSED WALL				SPOTLIGHTS	P. 106-107	LUMINAIRES	P. 108-109
	TRACK AND SPOTS				SPOTLIGHTS + LUMINAIRES P. 112-121 3-PHASE TRACK P. 122-127			
	OFFICE LUMINAIRES				STAND LUMINAIRES FREESTANDING	P. 130-133 P. 138-139	PENDANTS	P. 134-137
	INDUSTRY LUMINAIRES				TRUNKING RAILS SYSTEM HIGH-BAY LUMINAIRE	P. 142-149 P. 150-151	MOISTURE-PROOF LUMINAIRE EMERGENCY LUMINAIRES	P. 148-149 P. 150-151
	STRIPES & PROFILES				LED STRIPES LED CONVERTER	P. 154-163 P. 170-171	PROFILES LED CONTROLLER	P. 164-169 P. 170-171
	RECESSED WALL & CEILING OUTDOOR			OUTDOOR LUMINAIRES	WALL RECESSED P. 174-175 CEILING RECESSED P. 176-179			
	WALL & CEILING OUTDOOR				WALL SURFACE P. 182-187 CEILING SURFACE P. 188-191			
	DECORATIVE & BOLLARD				BOLLARD P. 194-199			
	PROJECTORS				SPOTLIGHTS P. 202-207			
	LED DRIVERS & LIGHTING CONTROL			TECHNIK	TRANSFORMERS CONTROLLER	P. 208 P. 214-217	LED CONVERTER	P. 209-213
	ACCESSORIES				IP-CONNECTORS PACKING SERVICE	P. 218 P. 218		
	LED-RETROFITS + BULBS				LED-RETROFITS + BULBS P. 220-223			
	INFO				INFORMATIONS P. 224			

004

i

005


CEILING RECESSED



PONTOS SQUARE




INFO PONTOS 10	POWER	mA	LUMEN	CRI	LED	L	W	ID	LxW	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, white, or black powder-coated, square, tilting 25°, with recessed light source, excl. converter	LED 10W	250	810	>80	2700K	90	90	110	83x83	<div>W</div>	<div>24°</div>	305-621524w27k	44,00	<div>👍</div>
	LED 10W	250	810	>80	2700K	90	90	110	83x83	<div>S</div>	<div>24°</div>	305-621524b27k	44,00	<div>👍</div>
	LED 10W	250	870	>80	3000K	90	90	110	83x83	<div>W</div>	<div>24°</div>	305-621524w	44,00	<div>👍</div>
	LED 10W	250	870	>80	3000K	90	90	110	83x83	<div>S</div>	<div>24°</div>	305-621524b	44,00	<div>👍</div>
	LED 10W	250	870	>80	4000K	90	90	110	83x83	<div>W</div>	<div>24°</div>	305-621524w40k	44,00	<div>👍</div>
	LED 10W	250	870	>80	4000K	90	90	110	83x83	<div>S</div>	<div>24°</div>	305-621524b40k	44,00	<div>👍</div>
	LED 10W	250	810	>80	2700K	90	90	110	83x83	<div>W</div>	<div>36°</div>	305-621536w27k	44,00	<div>👍</div>
	LED 10W	250	810	>80	2700K	90	90	110	83x83	<div>S</div>	<div>36°</div>	305-621536b27k	44,00	<div>👍</div>
	LED 10W	250	870	>80	3000K	90	90	110	83x83	<div>W</div>	<div>36°</div>	305-621536w	44,00	<div>👍</div>
	LED 10W	250	870	>80	3000K	90	90	110	83x83	<div>S</div>	<div>36°</div>	305-621536b	44,00	<div>👍</div>
	LED 10W	250	870	>80	4000K	90	90	110	83x83	<div>W</div>	<div>36°</div>	305-621536w40k	44,00	<div>👍</div>
	LED 10W	250	870	>80	4000K	90	90	110	83x83	<div>S</div>	<div>36°</div>	305-621536b40k	44,00	<div>👍</div>

LED CONVERTER PONTOS 10	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
 <div>Illustration picture</div>	not dimmable, 230 V AC	11	250	44	147	44	22	<div>W</div>	24-127570	15,00	<div>👍</div>
	dimmable, DALI dimm.	12	250	49	111	52	22	<div>W</div>	24-151403	40,00	<div>👍</div>







































INFO PONTOS 15	POWER	mA	LUMEN	CRI	LED	L	W	ID	LxW	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, white, or black powder-coated, square, tilting 25°, with recessed light source, excl. converter	LED 15W	350	1250	>80	2700K	90	90	110	83x83	<div>W</div>	<div>24°</div>	305-624824w27k	59,00	<div>👍</div>
	LED 15W	350	1250	>80	2700K	90	90	110	83x83	<div>S</div>	<div>24°</div>	305-624824b27k	59,00	<div>👍</div>
	LED 15W	350	1310	>80	3000K	90	90	110	83x83	<div>W</div>	<div>24°</div>	305-624824w	59,00	<div>👍</div>
	LED 15W	350	1310	>80	3000K	90	90	110	83x83	<div>S</div>	<div>24°</div>	305-624824b	59,00	<div>👍</div>
	LED 15W	350	1310	>80	4000K	90	90	110	83x83	<div>W</div>	<div>24°</div>	305-624824w40k	59,00	<div>👍</div>
	LED 15W	350	1310	>80	4000K	90	90	110	83x83	<div>S</div>	<div>24°</div>	305-624824b40k	59,00	<div>👍</div>
	LED 15W	350	1250	>80	2700K	90	90	110	83x83	<div>W</div>	<div>36°</div>	305-624836w27k	59,00	<div>👍</div>
	LED 15W	350	1250	>80	2700K	90	90	110	83x83	<div>S</div>	<div>36°</div>	305-624836b27k	59,00	<div>👍</div>
	LED 15W	350	1310	>80	3000K	90	90	110	83x83	<div>W</div>	<div>36°</div>	305-624836w	59,00	<div>👍</div>
	LED 15W	350	1310	>80	3000K	90	90	110	83x83	<div>S</div>	<div>36°</div>	305-624836b	59,00	<div>👍</div>
	LED 15W	350	1310	>80	4000K	90	90	110	83x83	<div>W</div>	<div>36°</div>	305-624836w40k	59,00	<div>👍</div>
	LED 15W	350	1310	>80	4000K	90	90	110	83x83	<div>S</div>	<div>36°</div>	305-624836b40k	59,00	<div>👍</div>

LED CONVERTER PONTOS 15	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
 <div>Illustration picture</div>	not dimmable, 230 V AC	16	350	46	147	44	30	<div>W</div>	24-127530n	15,00	<div>👍</div>
	dimmable, DALI dimm.	17	350	49	111	52	22	<div>W</div>	24-151403	40,00	<div>👍</div>





Project: Private residence, Austria
Planing office: Mayr & Glatzl
Photo: Gabriel Büchelmeier
Product: PONTOS SQUARE






INFO	POWER	mA	LUMEN	CRI	LED	L	W	ID	Ø	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, heat sink in die-cast aluminium, brushed or powder-coated, square, 30° tilting, excl. converter	LED 5W	250	500	>80	2700K	80	80	84	68			305-0050680202705	37,00	
	LED 5W	250	530	>80	2700K	80	80	84	68			305-0050680202706	37,00	
	LED 5W	250	550	>80	2700K	80	80	84	68			305-0050680202715	37,00	
	LED 5W	250	555	>80	2700K	80	80	84	68			305-0050680402705	37,00	
	LED 5W	250	560	>80	2700K	80	80	84	68			305-0050680402706	37,00	
	LED 5W	250	540	>80	2700K	80	80	84	68			305-0050680402715	37,00	
	LED 5W	250	540	>80	3000K	80	80	84	68			305-0050680203005	37,00	
	LED 5W	250	520	>80	3000K	80	80	84	68			305-0050680203006	37,00	
	LED 5W	250	560	>80	3000K	80	80	84	68			305-0050680203015	37,00	
	LED 5W	250	550	>80	3000K	80	80	84	68			305-0050680403005	37,00	
	LED 5W	250	575	>80	3000K	80	80	84	68			305-0050680403006	37,00	
	LED 5W	250	605	>80	3000K	80	80	84	68			305-0050680403015	37,00	

COVER




INFO	POWER	mA	LUMEN	CRI	LED	L	W	ID	□ LxW	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, white or silver powder-coated, square, frosted safety glass, excl. converter, recessed housing and recessed frames to be ordered separately	LED 6W	250	435	>80	3000K	89	89	108	76 x 76	<div>W</div>	--	305-0619150	43,00	
	LED 6W	250	435	>80	3000K	89	89	108	76 x 76	<div>S</div>	--	305-0619140	43,00	
	COVER				INFO				L	W	H	CODE	EURO	STOCK
					Incl. centering part, ceiling cutout 78 x 78mm, for concrete housing box 332-1001, galvanised steel sheet, not suitable for exposed concrete, suitable for COVER				168	168	11	332-1302	19,00	
	CONCRETE HOUSING				INFO				L	W	H	CODE	EURO	STOCK
				Without cover, in galvanised steel sheet, not suitable for exposed concrete, one hose entry each diam. 20mm, right - left and backside, order cover separately				170	170	116	332-1001	25,00		

LED CONVERTER AGON SQUARE & COVER	INFO	W	mA	V DC	L	B	H	COLOUR	CODE	EURO	STOCK
 <div>Illustration picture</div>	not dimmable, 230 V AC	11	250	44	147	44	22		24-127570	15,00	
	dimmable, DALI dimm.	12	250	49	111	52	22		24-151403	40,00	




Project: Private residence, Austria
Photo: Molto Luce
Product: COVER

CITY Z

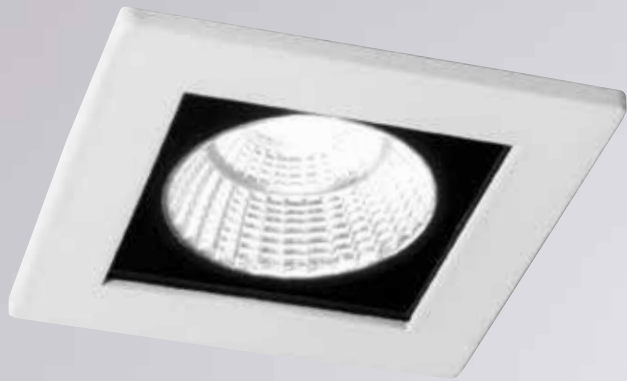

LED 350mA
excl. incl.
IP54
EEL: A++ - A

INFO	POWER	mA	LUMEN	CRI	LED	L	W	ID	LxW	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight in aluminium, matt powder-coated with fine textured paint, square, fixed, incl. clear protection glass, 37° beam angle, excl. converter	LED 12W	350	1100	>80	3000K	87	87	106	72x72	W	35°	308-101512337ng1	119,00	👍
	LED 12W	350	1100	>80	3000K	87	87	106	72x72	S	35°	308-101612337ng1	119,00	👍


LED CONVERTER CITY Z	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	16	350	46	147	44	30	W	24-127530n	15,00	👍
	dimmable, DALI dimm.	17	350	49	111	52	22	W	24-151403	40,00	👍

M/M/8/110°
IP20




Project: Fa. Latschbacher, Kronsdorf, Austria
Photo: Molto Luce
Product: CITY Z

CHICCO SQUARE

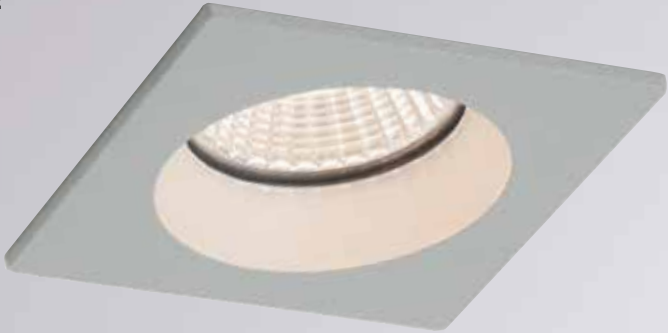

LED 350mA
excl. incl.
IP65
EEL: A++ - A

INFO	POWER	mA	LUMEN	CRI	LED	L	W	ID	Ø	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, matt powder-coated with fine textured paint, fixed, recessed light source, 30° beam angle, excl. converter	LED 7W	350	530	>90	2700K	90	90	80	78	S	30°	308-0020790302704	43,00	👍
	LED 7W	350	540	>90	2700K	90	90	80	78	W	30°	308-0020790302705	43,00	👍
	LED 7W	350	510	>90	2700K	90	90	80	78	S	30°	308-0020790302706	43,00	👍
	LED 7W	350	560	>90	3000K	90	90	80	78	S	30°	308-0020790303004	43,00	👍
	LED 7W	350	590	>90	3000K	90	90	80	78	W	30°	308-0020790303005	43,00	👍
	LED 7W	350	560	>90	3000K	90	90	80	78	S	30°	308-0020790303006	43,00	👍

LED CONVERTER CHICCO	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	16	350	46	147	44	30	W	24-127530n	15,00	👍
	dimmable, DALI dimm.	17	350	49	111	52	22	W	24-151403	40,00	👍


M/M/8/110°
IP20

IVY SQUARE



LED 200mA
excl. incl.
IP54
EEL: A++ - A

INFO	POWER	mA	LUMEN	CRI	LED	L	W	ID	Ø	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, matt powder-coated with fine textured paint, square, round ceiling cutout, fixed, with recessed light source, available in 2 beam angles, excl. converter	LED 7W	200	700	>90	3000K	72	72	93	60	W	20°	472-0270790203005	42,00	👍
	LED 7W	200	660	>90	3000K	72	72	93	60	S	20°	472-0270790203006	42,00	👍
	LED 7W	200	640	>90	3000K	72	72	93	60	W	40°	472-0270790403005	42,00	👍
	LED 7W	200	630	>90	3000K	72	72	93	60	S	40°	472-0270790403006	42,00	👍

LED CONVERTER IVY SQUARE	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	8,5	200	44	147	44	22	W	24-127570	15,00	👍
	dimmable, DALI dimm.	9,5	180	53	111	52	22	W	24-123395	40,00	👍

M/M/8/110°
IP20

PONTOS ROUND



INFO PONTOS 10	POWER	mA	LUMEN	CRI	LED	Ø	ID	Ø	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, white, or black powder-coated, round, tilting 25°, with recessed light source, excl. converter	LED 10W	250	805	>80	2700K	90	110	83	W	24°	305-602024w27k	44,00	👍
	LED 10W	250	805	>80	2700K	90	110	83	S	24°	305-602024b27k	44,00	👍
	LED 10W	250	840	>80	3000K	90	110	83	W	24°	305-602024w	44,00	👍
	LED 10W	250	840	>80	3000K	90	110	83	S	24°	305-602024b	44,00	👍
	LED 10W	250	840	>80	4000K	90	110	83	W	24°	305-602024w40k	44,00	👍
	LED 10W	250	840	>80	4000K	90	110	83	S	24°	305-602024b40k	44,00	👍
	LED 10W	250	805	>80	2700K	90	110	83	W	36°	305-602036w27k	44,00	👍
	LED 10W	250	805	>80	2700K	90	110	83	S	36°	305-602036b27k	44,00	👍
	LED 10W	250	840	>80	3000K	90	110	83	W	36°	305-602036w	44,00	👍
	LED 10W	250	840	>80	3000K	90	110	83	S	36°	305-602036b	44,00	👍
	LED 10W	250	840	>80	4000K	90	110	83	W	36°	305-602036w40k	44,00	👍
	LED 10W	250	840	>80	4000K	90	110	83	S	36°	305-602036b40k	44,00	👍

LED CONVERTER PONTOS 10	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	11	250	44	147	44	22	W	24-127570	15,00	👍
	dimmable, DALI dimm.	12	250	49	111	52	22	W	24-151403	40,00	👍



INFO PONTOS 15	POWER	mA	LUMEN	CRI	LED	Ø	ID	Ø	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, white, or black powder-coated, round, tilting 25°, with recessed light source, excl. converter	LED 15W	350	1245	>80	2700K	90	110	83	W	24°	305-619924w27k	59,00	👍
	LED 15W	350	1245	>80	2700K	90	110	83	S	24°	305-619924b27k	59,00	👍
	LED 15W	350	1280	>80	3000K	90	110	83	W	24°	305-619924w	59,00	👍
	LED 15W	350	1280	>80	3000K	90	110	83	S	24°	305-619924b	59,00	👍
	LED 15W	350	1280	>80	4000K	90	110	83	W	24°	305-619924w40k	59,00	👍
	LED 15W	350	1280	>80	4000K	90	110	83	S	24°	305-619924b40k	59,00	👍
	LED 15W	350	1245	>80	2700K	90	110	83	W	36°	305-619936w27k	59,00	👍
	LED 15W	350	1245	>80	2700K	90	110	83	S	36°	305-619936b27k	59,00	👍
	LED 15W	350	1280	>80	3000K	90	110	83	W	36°	305-619936w	59,00	👍
	LED 15W	350	1280	>80	3000K	90	110	83	S	36°	305-619936b	59,00	👍
	LED 15W	350	1280	>80	4000K	90	110	83	W	36°	305-619936w40k	59,00	👍
	LED 15W	350	1280	>80	4000K	90	110	83	S	36°	305-619936b40k	59,00	👍

LED CONVERTER PONTOS 15	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	16	350	46	147	44	30	W	24-127530n	15,00	👍
	dimmable, DALI dimm.	17	350	49	111	52	22	W	24-151403	40,00	👍



AGON ROUND



INFO	POWER	mA	LUMEN	CRI	LED	Ø	ID	Ø	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, white, or black powder-coated, round, tilting 30°, with recessed light source, excl. converter	LED 5W	250	500	>80	2700K	80	70	68	W	20°	305-0040680202705	35,00	👍
	LED 5W	250	530	>80	2700K	80	70	68	S	20°	305-0040680202706	35,00	👍
	LED 5W	250	550	>80	2700K	80	70	68	AG	20°	305-0040680202715	35,00	👍
	LED 5W	250	555	>80	2700K	80	70	68	W	40°	305-0040680402705	35,00	👍
	LED 5W	250	560	>80	2700K	80	70	68	S	40°	305-0040680402706	35,00	👍
	LED 5W	250	540	>80	2700K	80	70	68	AG	40°	305-0040680402715	35,00	👍
	LED 5W	250	540	>80	3000K	80	70	68	W	20°	305-0040680203005	35,00	👍
	LED 5W	250	520	>80	3000K	80	70	68	S	20°	305-0040680203006	35,00	👍
	LED 5W	250	560	>80	3000K	80	70	68	AG	20°	305-0040680203015	35,00	👍
	LED 5W	250	550	>80	3000K	80	70	68	W	40°	305-0040680403005	35,00	👍
	LED 5W	250	575	>80	3000K	80	70	68	S	40°	305-0040680403006	35,00	👍
	LED 5W	250	605	>80	3000K	80	70	68	AG	40°	305-0040680403015	35,00	👍

LED CONVERTER AGON ROUND	INFO	W	mA	V DC	L	B	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	11	250	44	147	44	22	W	24-127570	15,00	👍
	dimmable, DALI dimm.	12	250	49	111	52	22	W	24-151403	40,00	👍



Project: Private residence, Austria
Photo: Tischlerei Kotrasch
Product: PONTOS ROUND



Picture retouch
Photo: Shutterstock
Product: AGON ROUND


MOBILIS 250 / MOBILIS 400



LED 700mA
30° 355°
excl. incl.
IP20
EEL: A++ - A

INFO MOBILIS 250	POWER	mA	LUMEN	CRI	LED	Ø	H max.	ID	Ø	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, white or black powder-coated with fine textured paint, decoration ring made of black synthetic, cilindric, spotlight head 30° tilting and 355° swiveling, extendable (pay attention to mounting depth) excl. converter	LED 8W	700	310	>80	3000K	91	250	75-280	83	W	33°	276-10083080wb	110,00	👍
	LED 8W	700	310	>80	3000K	91	250	75-280	83	S	33°	276-10083080bb	110,00	👍

INFO MOBILIS 400	POWER	mA	LUMEN	CRI	LED	Ø	H max.	ID	Ø	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, white or black powder-coated with fine textured paint, decoration ring made of black synthetic, cilindric, spotlight head 30° tilting and 355° swiveling, extendable (pay attention to mounting depth) excl. converter	LED 8W	700	310	>80	3000K	91	400	75-430	83	W	33°	276-10073080wb	119,00	👍
	LED 8W	700	310	>80	3000K	91	400	75-430	83	S	33°	276-10073080bb	119,00	👍

LED CONVERTER MOBILIS 250 & 400	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	20	700	29	111	52	22	W	24-122201	24,00	👍
	dimmable, DALI dimm.	20	700	28	111	52	22	W	24-151403	40,00	👍

IP20





Project: Kreisel Electric
Photo: Martin Pröll
Product: MOBILIS 400

ELIX



LED 500mA
45°
355°
excl.
incl.
IP20
EEI: A++ - A

INFO	POWER	mA	LUMEN	CRI	LED	Ø	ID	⌀	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, matt powder-coated with fine textured paint, decoration ring made of black synthetic, spotlight head 45° tilting and 350° swiveling, 33° beam angle, excl. converter	LED 9W	500	650	>90	2700K	110	91	102	W	33°	276-0010990332756	83,00	👍
	LED 9W	500	650	>90	2700K	110	91	102	S	33°	276-0010990332706	83,00	👍
	LED 9W	500	770	>90	3000K	110	91	102	W	33°	276-0010990333056	83,00	👍
	LED 9W	500	770	>90	3000K	110	91	102	S	33°	276-0010990333006	83,00	👍
DECOR RING					INFO				Ø	COLOUR	CODE	EURO	STOCK
					Synthetic decoration ring, gold or white, for ELIX, changeable without tools, order separately				60	G	276-7000	5,00	👍
									60	W	276-7001	5,00	👍
HONEY COMB LOUVRE					INFO				Ø	COLOUR	CODE	EURO	STOCK
					Made of metal, for ELIX, mountable without tools, order separately				60	S	276-1002	4,00	👍


LED CONVERTER ELIX	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	23	500	46	147	44	30	W	24-127532n	15,00	👍
	dimmable, DALI dimm.	20	500	40	111	52	22	W	24-151403	40,00	👍

IP20

ELIX MINI



LED 350mA
90°
350°
excl.
incl.
IP20
EEI: A++ - A

INFO	POWER	mA	LUMEN	CRI	LED	Ø	ID	⌀	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, matt powder-coated with textured paint, decoration ring made of black synthetic, spotlight head 90° tilting and 350° swiveling, 34° beam angle, excl. converter	LED 6W	350	330	>90	2700K	70	125	64	W	34°	276-0130690342756	79,00	👍
	LED 6W	350	330	>90	2700K	70	125	64	S	34°	276-0130690342706	79,00	👍
	LED 6W	350	340	>90	3000K	70	125	64	W	34°	276-0130690343056	79,00	👍
	LED 6W	350	340	>90	3000K	70	125	64	S	34°	276-0130690343006	79,00	👍
DECOR RING					INFO				Ø	COLOUR	CODE	EURO	STOCK
					Synthetic decoration ring, gold or white, for ELIX MINI, changeable without tools, order separately				37	G	276-7002	4,50	👍
									37	W	276-7003	4,50	👍

LED CONVERTER ELIX MINI	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	16	350	46	147	44	30	W	24-127530n	15,00	👍
	dimmable, DALI dimm.	17	350	49	111	52	22	W	24-151403	40,00	👍

IP20



Project: Kriesel Electric
Photo: Martin Pröll
Product: ELIX

DARK NIGHT TURN XS R



INFO	LUMEN / W IN 250mA	LUMEN / W IN 350mA	CRI	LED	Ø	ID	Ø	REF	CODE	EURO	STOCK
Swivelling recessed LED spotlight, die-cast aluminium, white or black powder-coated with fine textured paint, reflector in 4 colours, energy-efficient COB LED with high colour rendering, order converter separately	LED 9W	LED 13W									
	770	1010	PREMIUM >90	2700K	86	94	80	40°	684-004RR0543XX	109,00	👍
	800	1050	PREMIUM >90	3000K	86	94	80	40°	684-004RR0549XX	109,00	👍
	850	1120	>90	4000K	86	94	80	40°	684-004RR0524XX	109,00	
	ORDER CONVERTER SEPARATELY										
LED 3500K on request	24-127570	24-127530n	not dimmable								
	15,00	15,00	EURO								
	24-151403	24-151403	DALI dimm.								
	40,00	40,00	EURO								

DARK NIGHT TURN SMALL R



INFO	LUMEN / W IN 350mA	LUMEN / W IN 500mA	CRI	LED	Ø	ID	Ø	REF	CODE	EURO	STOCK
Swivelling recessed LED spotlight, die-cast aluminium, white or black powder-coated with fine textured paint, reflector in 4 colours, energy-efficient COB LED with high colour rendering, order converter separately	LED 13W	LED 19W									
	1070	1420	PREMIUM >90	2700K	105	110	100	40°	684-005RR0543XX	119,00	👍
	1110	1480	PREMIUM >90	3000K	105	110	100	40°	684-005RR0549XX	119,00	👍
	1190	1580	>90	4000K	105	110	100	40°	684-005RR0524XX	119,00	
	ORDER CONVERTER SEPARATELY										
LED 3500K on request	24-127530n	24-127532n	not dimmable								
	15,00	15,00	EURO								
	24-151403	24-151403	DALI dimm.								
	40,00	40,00	EURO								

COMPLETE CODE	
RR = COLOUR OF REFLECTOR	XX = COLOUR OF LUMINAIRE
REFLECTOR SILVER = 02	w white = 05
REFLECTOR BLACK = 03	s black = 06
REFLECTOR GOLD = 04	
REFLECTOR WHITE = 06	



Picture retouch
Photo: Shutterstock
Product: DARK NIGHT TURN SMALL R

DARK NIGHT XS R




LED 250-350mA excl. incl. IP20 | EEI: A++ - A

INFO	LUMEN / W IN 250mA	LUMEN / W IN 350mA	CRI	LED	Ø	ID	⊙ Ø	REF	CODE	EURO	STOCK
Recessed downlight in aluminium, black or white powder-coated, perfect anti-glare due to white, silver, gold or black glossy grid, order converter separately	LED 9W	LED 13W	PREMIUM >90	2700K	65	91	60		684-003RR0543XX	79,00	
	780lm	1010lm		3000K	65	91	60		684-003RR0549XX	79,00	
	810lm	1050lm	PREMIUM >90	4000K	65	91	60		684-003RR0524XX	79,00	
	860lm	1020lm	>90								
	ORDER CONVERTER SEPARATELY										
LED 3500K on request	24-127570	24-127530n	not dimmable								
	15,00	15,00	EURO								
	24-151403	24-151403	DALI dimm.								
	40,00	40,00	EURO								



DARK NIGHT SMALL R

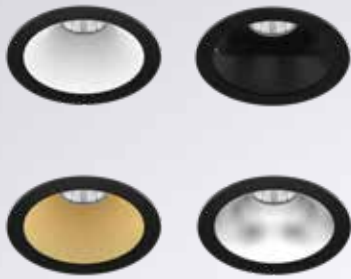


LED 350-500mA excl. incl. IP20 | EEI: A++ - A

INFO	LUMEN / W IN 350mA	LUMEN / W IN 500mA	CRI	LED	Ø	ET	⊙ Ø	REF	CODE	EURO	STOCK
Recessed downlight in aluminium, black or white powder-coated, perfect anti-glare due to white, silver, gold or black glossy grid, order converter separately	LED 13W	LED 19W	PREMIUM >90	2700K	83	106	78		684-001RR0543XX	89,00	
	1070	1430		3000K	83	106	78		684-001RR0549XX	89,00	
	1110	1490	PREMIUM >90	4000K	83	106	78		684-001RR0524XX	89,00	
	1190	1600	>90								
	ORDER CONVERTER SEPARATELY										
LED 3500K on request	24-127530n	24-127532n	not dimmable								
	15,00	15,00	EURO								
	24-151403	24-151403	DALI dimm.								
	40,00	40,00	EURO								



COMPLETE CODE	
RR = COLOUR OF REFLECTOR	XX = COLOUR OF LUMINAIRE
REFLECTOR SILVER = 02	white = 05
REFLECTOR BLACK = 03	black = 06
REFLECTOR GOLD = 04	
REFLECTOR WHITE = 06	

DARK NIGHT MEDIUM R

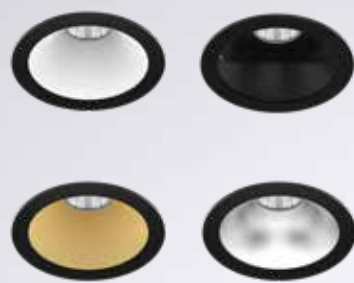

LED 500-900mA excl. incl. IP20 | EEI: A++ - A

INFO	LUMEN / W IN 500mA	LUMEN / W IN 700mA	LUMEN / W IN 900mA	CRI	LED	Ø	ET	⊙ Ø	REF	CODE	EURO	STOCK
Recessed downlight in aluminium, black or white powder-coated, perfect anti-glare due to white, silver, gold or black glossy grid, order converter separately	LED 18W	LED 25W	LED 33W	PREMIUM >90	2700K	157	136	150		684-002RR0543XX	139,00	
	1580	2100	2580		3000K	157	136	150		684-002RR0549XX	139,00	
	1640	2190	2680	PREMIUM >90	4000K	157	136	150		684-002RR0524XX	139,00	
	1760	2340	2870	>90								
	ORDER CONVERTER SEPARATELY											
LED 3500K on request	24-127532n	24-127534n	24-127536n	not dimmable								
	15,00	15,00	18,00	EURO								
	24-127490	24-127490	24-127490	DALI dimm								
	46,00	46,00	46,00	EURO								



COMPLETE CODE	
RR = COLOUR OF REFLECTOR	XX = COLOUR OF LUMINAIRE
REFLECTOR SILVER = 02	white = 05
REFLECTOR BLACK = 03	black = 06
REFLECTOR GOLD = 04	
REFLECTOR WHITE = 06	



MOLTO LUCE®


Picture retouch
Photo: Shutterstock
Product: DARK NIGHT SMALL R

DITTO



LED 250mA
excl. incl.
IP44
EEL: A++ - A

INFO	POWER	mA	LUMEN	CRI	LED	Ø	ID	⌀	COLOUR	REF	CODE	EURO	STOCK	
Recessed spotlight, die-cast aluminium, white or silver powder-coated, round, frosted safety glass, excl. converter, recessed housing and recessed frames to be ordered separately	LED 6W	250	415	>80	3000K	92	108	76	W	--	305-0719150	39,00	👍	
	COVER					INFO			L	W	H	CODE	EURO	STOCK
						Incl. centering part, ceiling cutout diam. 78mm, for concrete housing box 332-1001, galvanised steel sheet, not suitable for exposed concrete, suitable for DITTO			168	168	11	332-1402	19,00	👍
	CONCRETE HOUSING					INFO			L	W	H	CODE	EURO	STOCK
					Without cover, in galvanised steel sheet, not suitable for exposed concrete, one hose entry each diam. 20mm, right - left and backside, order cover separately			170	170	116	332-1001	25,00	👍	

LED CONVERTER DITTO	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	11	250	44	147	44	22	W	24-127570	15,00	👍
	dimmable, DALI dimm.	12	250	49	111	52	22	W	24-151403	40,00	👍

IP20




Picture retouch
Photo: Shutterstock
Product: DITTO

LOOK ROUND SMALL



LED 350mA
excl. incl.
IP20
EEL: A++ - A

INFO	POWER	mA	LUMEN	CRI	LED	Ø	ID	⌀	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, white powder-coated, round, fixed, with recessed light source, excl. converter	LED 7W	350	535	>90	3000K	79	137	67	<div>W</div>	<div>472°</div>	472-291010wr	59,00	<div>👍</div>

LED CONVERTER LOOK ROUND SMALL	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	16	350	46	147	44	30	W	24-127530n	15,00	👍
	dimmable, DALI dimm.	17	350	49	111	52	22	W	24-151403	40,00	👍


IP20

LOOK ROUND BIG



LED 350mA
excl. incl.
IP20
EEL: A++ - A

INFO	POWER	mA	LUMEN	CRI	LED	Ø	ID	⊕ ⊖	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, white powder-coated, round, fixed, with recessed light source, excl. converter	LED 11W	350	950	>90	3000K	114	173	100	<div>W</div>	<div>472-0321090303005</div>	472-0321090303005	99,00	<div>👍</div>


LED CONVERTER LOOK ROUND BIG	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	16	350	46	147	44	30	W	24-127530n	15,00	👍
	dimmable, DALI dimm.	17	350	49	111	52	22	W	24-151403	40,00	👍

IP20

CIRCINA



INFO	POWER	mA	LUMEN	CRI	LED	Ø	ID	⌀	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, matt powder-coated with fine textured paint, 30° tilting, recessed light source, 24° beam angle, excl. converter	LED 9W	250	930	>80	3000K	90	74	83	<div>W</div>	<div>24°</div>	305-1419050	69,00	<div>👍</div>
	LED 9W	250	930	>80	3000K	90	74	83	<div>S</div>	<div>24°</div>	305-1419060	69,00	<div>👍</div>
	LED 9W	250	930	>80	3000K	90	74	83	<div>AB</div>	<div>24°</div>	305-14190140	69,00	<div>👍</div>

LED CONVERTER CIRCINA	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	11	250	44	147	44	22	<div>W</div>	24-127570	15,00	<div>👍</div>
	dimmable, DALI dimm.	12	250	49	111	52	22	<div>W</div>	24-151403	40,00	<div>👍</div>

▼▼▼

8

▼10°

☉


□

IP20

CHICCO ROUND



INFO	POWER	mA	LUMEN	CRI	LED	Ø	ID	⌀	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, matt powder-coated with fine textured paint, fixed, recessed light source, 30° beam angle, excl. converter	LED 7W	350	530	>90	2700K	90	80	78	<div>S</div>	<div>30°</div>	308-0010790302704	43,00	<div>👍</div>
	LED 7W	350	540	>90	2700K	90	80	78	<div>W</div>	<div>30°</div>	308-0010790302705	43,00	<div>👍</div>
	LED 7W	350	510	>80	2700K	90	80	78	<div>S</div>	<div>30°</div>	308-0010790302706	43,00	<div>👍</div>
	LED 7W	350	560	>90	3000K	90	80	78	<div>S</div>	<div>30°</div>	308-0010790303004	43,00	<div>👍</div>
	LED 7W	350	590	>90	3000K	90	80	78	<div>W</div>	<div>30°</div>	308-0010790303005	43,00	<div>👍</div>
	LED 7W	350	560	>90	3000K	90	80	78	<div>S</div>	<div>30°</div>	308-0010790303006	43,00	<div>👍</div>

LED CONVERTER CHICCO	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	16	350	46	147	44	30	<div>W</div>	24-127530n	15,00	<div>👍</div>
	dimmable, DALI dimm.	17	350	49	111	52	22	<div>W</div>	24-151403	40,00	<div>👍</div>

▼▼▼

8

▼10°

☉


□

IP20

IVY ROUND



INFO	POWER	mA	LUMEN	CRI	LED	Ø	ID	⌀	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, matt powder-coated with fine textured paint, round, round ceiling cutout, fixed, with recessed light source, available in 2 beam angles, excl. converter	LED 7W	200	700	>90	3000K	72	93	60	<div>W</div>	<div>20°</div>	472-0260790203005	39,00	<div>👍</div>
	LED 7W	200	535	>90	3000K	72	93	60	<div>S</div>	<div>20°</div>	472-0260790203006	39,00	<div>👍</div>
	LED 7W	200	670	>90	3000K	72	93	60	<div>W</div>	<div>40°</div>	472-0260790403005	39,00	<div>👍</div>
	LED 7W	200	620	>90	3000K	72	93	60	<div>S</div>	<div>40°</div>	472-0260790403006	39,00	<div>👍</div>

LED CONVERTER IVY ROUND	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	8,5	200	44	147	44	22	<div>W</div>	24-127570	15,00	<div>👍</div>
	dimmable, DALI dimm.	9,5	180	53	111	52	22	<div>W</div>	24-123395	40,00	<div>👍</div>

▼▼▼

8

▼10°

☉

□

IP20



Project: Hotel Aigo, Aigen, Austria
Photo: Molto Luce
Product: CHICCO ROUND

VISIBLE II HV



230V
HV

□












↓ 32°

Ⓢ

▽

IP20

EEI: A++ - D

INFO	BULB	SOCKET	V	W	L	W	ID	 LxW	COLOUR	REF	CODE	EURO	STOCK	
Recessed spotlight, die-cast aluminium, white, black or silver powder-coated, square, tilting 32°, with recessed light source, recessed housing and recessed frames to be ordered separately	RETROFIT	GU10	230	max. 9	85	85	135	74x72	 W	--	305-1440w	19,00		
	RETROFIT	GU10	230	max. 9	85	85	135	74x72	 S	--	305-1440s	19,00		
	RETROFIT	GU10	230	max. 9	85	85	135	74x72	 S	--	305-1440b	19,00		
COVER			INFO						L	B	H	CODE	EURO	STOCK
			Incl. centering part, ceiling cutout 70 x 75mm, for concrete housing box 332-1001, galvanised steel sheet, not suitable for exposed concrete, suitable for VISIBLE II HV						168	168	11	332-1202	19,00	
CONCRETE HOUSING			INFO						L	B	H	CODE	EURO	STOCK
			Without cover, in galvanised steel sheet, not suitable for exposed concrete, one hose entry each diam. 20mm, right - left and backside, order cover separately						170	170	116	332-1001	25,00	

SERIE 4236 HV



230V
HV

□

↓ 25°

Ⓢ

▽

IP20

EEI: A++ - D

INFO	BULB	SOCKET	V	W	L	W	ID	⌀	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, white or black powder-coated or galvanized, square, tilting 25°, round ceiling cutout, incl. 30cm cable	RETROFIT	GU10	230	max. 9	88	88	120	68	MP	--	8-42361hv	13,50	👍
	RETROFIT	GU10	230	max. 9	88	88	120	68	C	--	8-42364hv	13,50	👍
	RETROFIT	GU10	230	max. 9	88	88	120	68	S	--	8-42366hv	11,50	👍
	RETROFIT	GU10	230	max. 9	88	88	120	68	W	--	8-42367hv	11,50	👍
	RETROFIT	GU10	230	max. 9	88	88	120	68	NM	--	8-423646hv	13,50	👍
with bayonet closure													

SERIE 2374 HV



230V
HV

□

↓ 45°

Ⓢ

▽

IP20

EEI: A++ - D

INFO	BULB	SOCKET	V	W	L	W	ID	▮ LxW	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, white powder-coated or galvanized, square, tilting 45°, incl. 30cm cable	RETROFIT	GU10	230	max. 9	96	96	130	80x80	C	--	8-23744hv	16,00	👍
	RETROFIT	GU10	230	max. 9	96	96	130	80x80	W	--	8-23747hv	15,50	👍
	RETROFIT	GU10	230	max. 9	96	96	130	80x80	NM	--	8-237446hv	16,00	👍

SERIE 348 HV



230V
HV

□

↓ 30°

Ⓢ

▽

IP20

EEI: A++ - D

INFO	BULB	SOCKET	V	W	L	W	ID	▮ LxW	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, white powder-coated or galvanized, square, tilting 30°, incl. 30cm cable	RETROFIT	GU10	230	max. 9	90	90	145	80x80	W	--	8-3487hv	16,00	👍
	RETROFIT	GU10	230	max. 9	90	90	145	80x80	NM	--	8-34846hv	16,50	👍

Project: Private residence, Austria
Photo: Molto Luce
Product: VISIBLE II HV

QANA 1



230V
HV

30° 350°

IP20 EEL: A++ - D

INFO	BULB	SOCKET	V	W	L	W	ID	LxW	COLOUR	REF	CODE	EURO	STOCK
Gimbal downlight, milled aluminium, painted, white or black powder-coated, 350° swiveling and 30° tilting	RETROFIT	GU10	230	max. 9	87	87	65	76x76	AL	--	472-259034hv	42,00	👍
	RETROFIT	GU10	230	max. 9	87	87	65	76x76	W	--	472-25903405hv	42,00	👍
	RETROFIT	GU10	230	max. 9	87	87	65	76x76	S	--	472-25903406hv	42,00	👍

QANA 2



230V
HV

30° 350°

IP20 EEL: A++ - D

INFO	BULB	SOCKET	V	W	L	W	ID	LxW	COLOUR	REF	CODE	EURO	STOCK
Gimbal downlight, milled aluminium, painted, white or black powder-coated, 350° swiveling and 30° tilting	RETROFIT	GU10	230	max. 9	174	87	65	165x76	AL	--	472-259035hv	89,00	👍
	RETROFIT	GU10	230	max. 9	174	87	65	165x76	W	--	472-25903505hv	89,00	👍
	RETROFIT	GU10	230	max. 9	174	87	65	165x76	S	--	472-25903506hv	89,00	👍













Picture retouch
Photo: Shutterstock
Product: QANA 1

SERIE 68 HV













230V HV   45°   IP20 | EEL: A++ - D

INFO	BULB	SOCKET	V	W	Ø	ID	Ø	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, white or black powder-coated or galvanized, round, tilting 25°, incl. 30cm cable	RETROFIT	GU10	230	max. 9	80	120	68		--	8-681hv	9,00	
	RETROFIT	GU10	230	max. 9	80	120	68		--	8-684hv	9,00	
	RETROFIT	GU10	230	max. 9	80	120	68		--	8-686hv	8,50	
	RETROFIT	GU10	230	max. 9	80	120	68		--	8-687hv	8,50	
	RETROFIT	GU10	230	max. 9	80	120	68		--	8-6846hv	9,00	

SERIE 332 HV





230V HV   25°   IP20 | EEL: A++ - D


INFO	BULB	SOCKET	V	W	Ø	ID	Ø	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, white or black powder-coated or galvanized, round, tilting 25°, incl. 30cm cable	RETROFIT	GU10	230	max. 9	88	120	68		--	8-3321hv	13,50	
	RETROFIT	GU10	230	max. 9	88	120	68		--	8-3324hv	13,50	
	RETROFIT	GU10	230	max. 9	88	120	68		--	8-3326hv	11,50	
	RETROFIT	GU10	230	max. 9	88	120	68		--	8-3327hv	11,50	
	RETROFIT	GU10	230	max. 9	88	120	68		--	8-33246hv	13,50	
with bayonet closure												

SERIE 3391 HV



230V HV   45°   IP20 | EEL: A++ - D

INFO	BULB	SOCKET	V	W	Ø	ID	Ø	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, brushed, round, tilting 45°, incl. 30cm cable	RETROFIT	GU10	230	max. 9	92	120	80		--	8-3391shv	19,00	

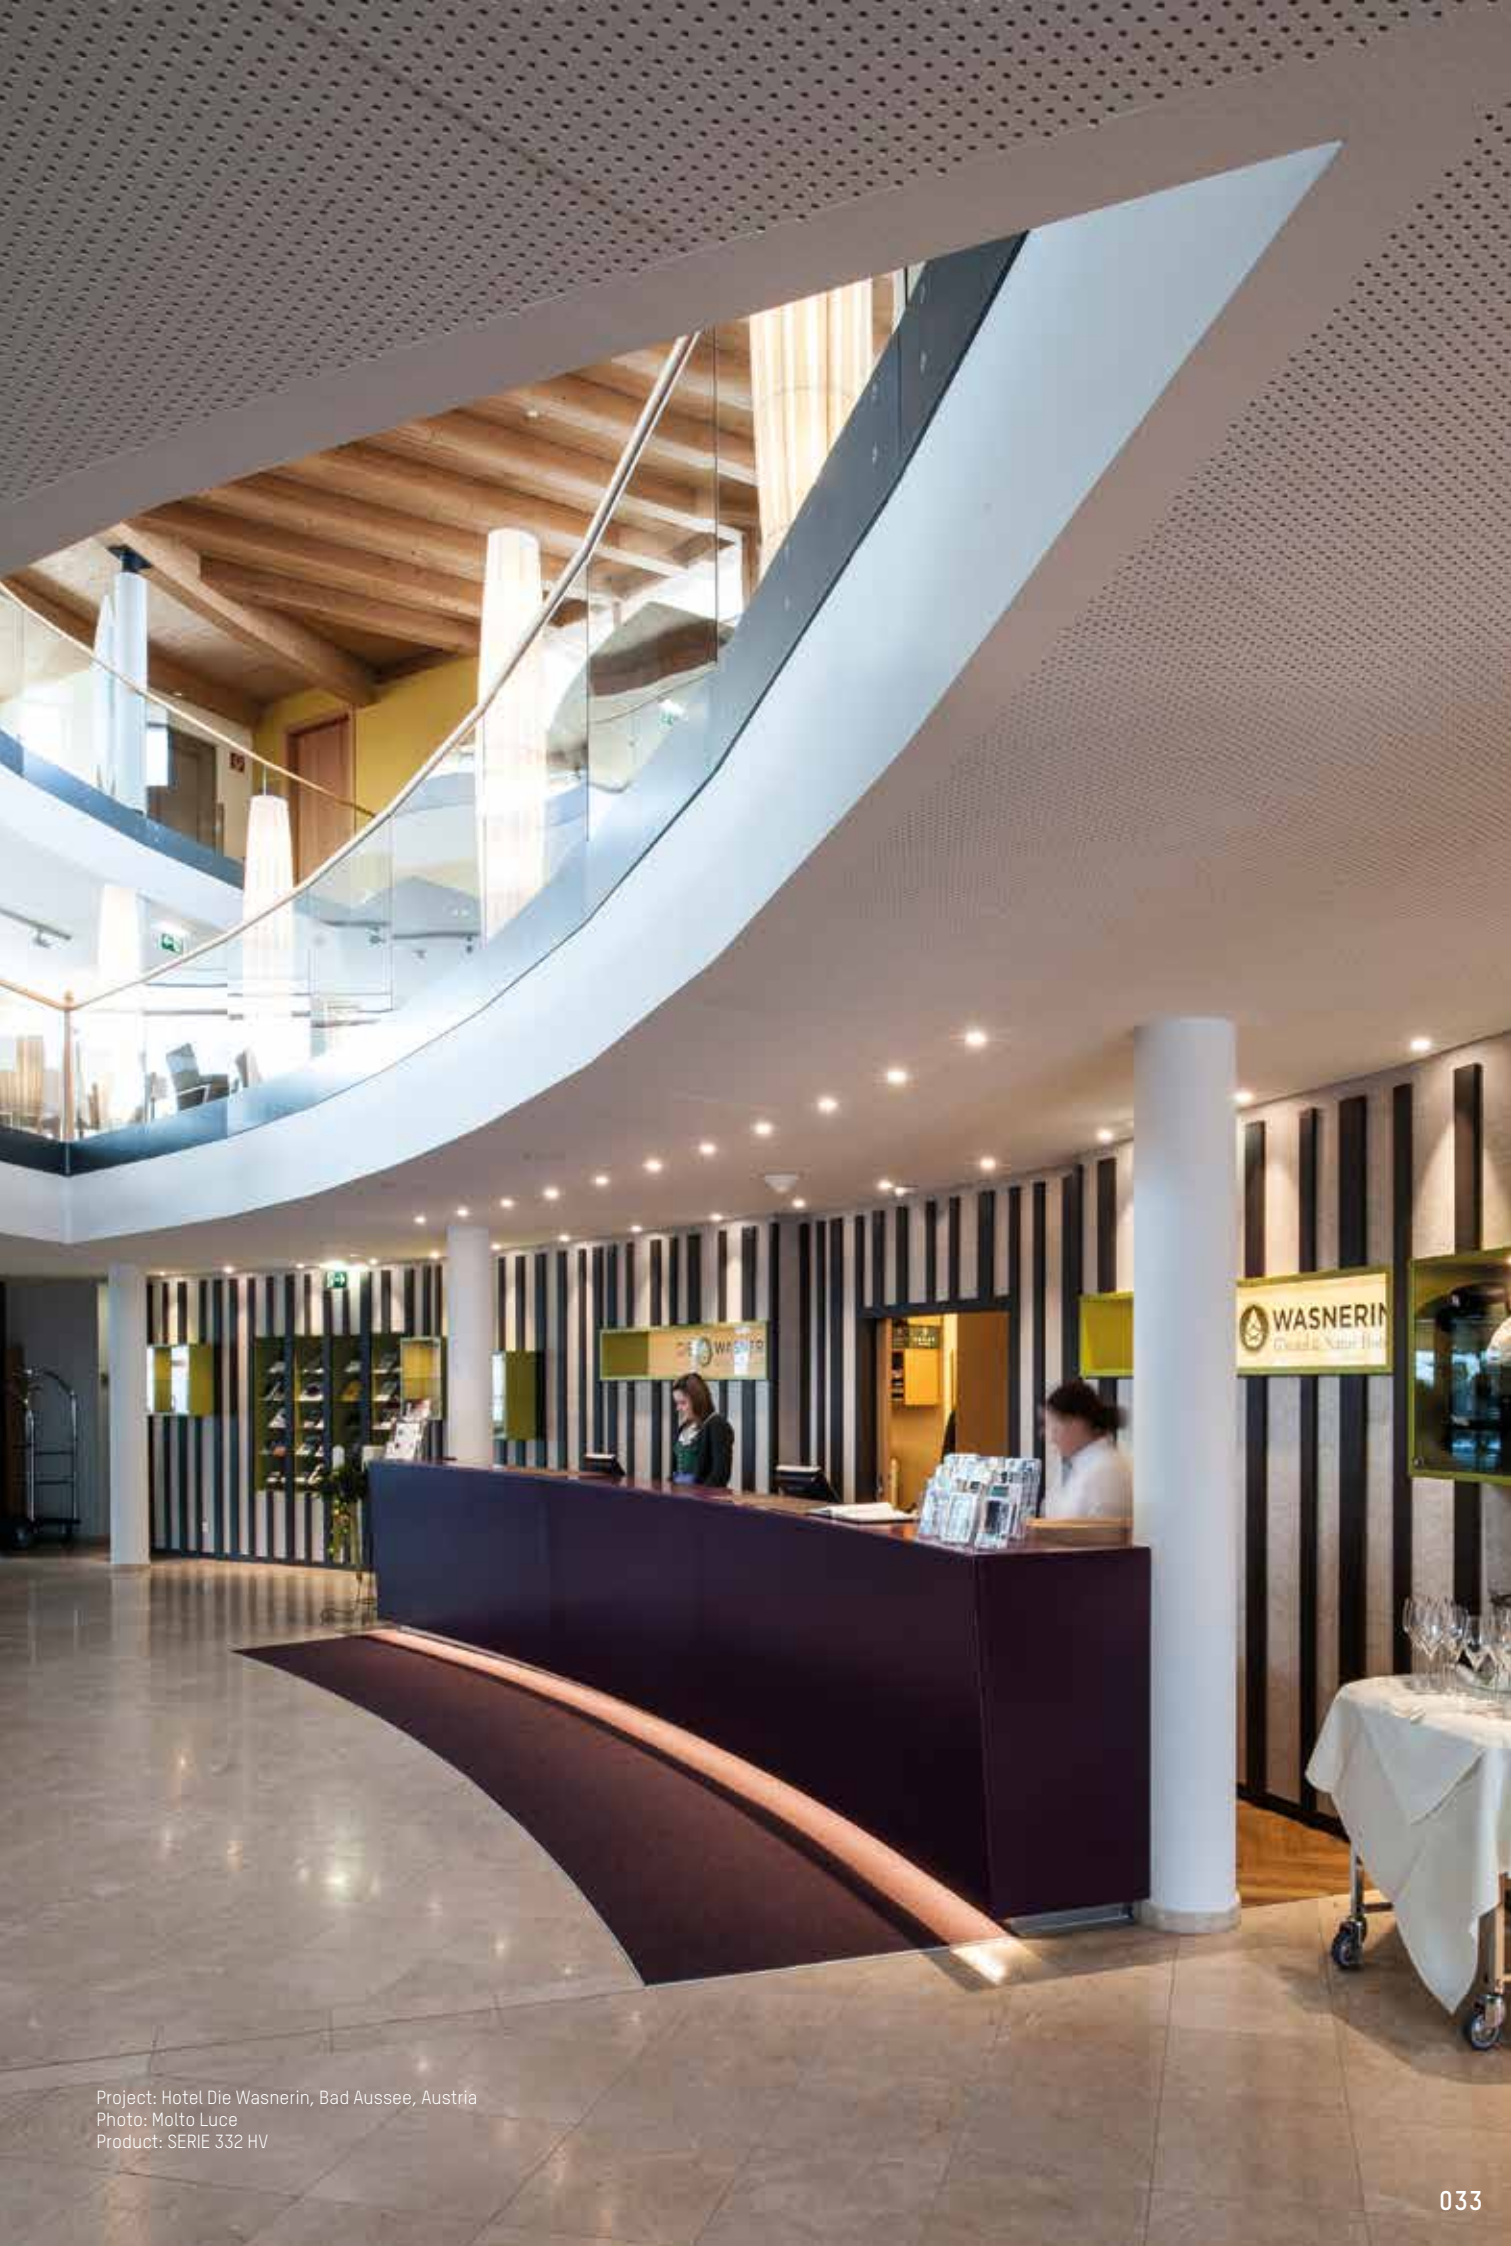

Project: Hotel Die Wasnerin, Bad Aussee, Austria
Photo: Molto Luce
Product: SERIE 332 HV

SERIE 146 HV



230V
HV

⬆

⬇

⚡

IP20

EEI: A++ - D

INFO	BULB	SOCKET	V	W	∅	ET	⌚ ∅	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, white or black powder-coated or galvanized, round,incl. 30cm cable	RETROFIT	GU10	230	max. 9	77	115	68	<div>C</div>	--	8-1464hv	7,50	<div>👍</div>
	RETROFIT	GU10	230	max. 9	77	115	68	<div>S</div>	--	8-1466hv	6,50	<div>👍</div>
	RETROFIT	GU10	230	max. 9	77	115	68	<div>W</div>	--	8-1467hv	6,50	<div>👍</div>
	RETROFIT	GU10	230	max. 9	77	115	68	<div>NM</div>	--	8-14646hv	7,50	<div>👍</div>

SERIE 223 HV



230V
HV

⬆

⬇

⚡

IP20

EEI: A++ - D

INFO	BULB	SOCKET	V	W	∅	ET	⌚ ∅	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, white or black powder-coated or galvanized, round,incl. 30cm cable	RETROFIT	GU10	230	max. 9	81	125	70	<div>W</div>	--	8-2237hv	8,50	<div>👍</div>
	RETROFIT	GU10	230	max. 9	81	125	70	<div>NM</div>	--	8-22346hv	9,50	<div>👍</div>
	RETROFIT	GU10	230	max. 9	81	125	70	<div>S</div>	--	8-2235hv	8,50	<div>👍</div>

SERIE 3380 HV



230V
HV

⬆

⬇

⚡

IP20

EEI: A++ - D

INFO	BULB	SOCKET	V	W	∅	ET	⌚ ∅	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, white or black powder-coated, round,incl. 30cm cable	RETROFIT	GU10	230	max. 9	82	150	75	<div>S</div>	--	8-33806hv	11,00	<div>👍</div>
	RETROFIT	GU10	230	max. 9	82	150	75	<div>W</div>	--	8-33807hv	11,00	<div>👍</div>



Project: Private residence, Austria
Foto: Molto Luce
Product: SERIE 3380 HV

SERIE 1101 HV



230V
HV

⬆

⬇

⚡

IP65

EEI: A++ - D

INFO	BULB	SOCKET	V	W	∅	ET	⌚ ∅	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, white or black powder-coated or galvanized, round,incl. 30cm cable	RETROFIT	GU10	230	max. 9	85	120	74	<div>C</div>	--	8-1101b4hv	15,50	<div>👍</div>
	RETROFIT	GU10	230	max. 9	85	120	74	<div>S</div>	--	8-1101b6hv	14,50	<div>👍</div>
	RETROFIT	GU10	230	max. 9	85	120	74	<div>W</div>	--	8-1101b7hv	14,50	<div>👍</div>
	RETROFIT	GU10	230	max. 9	85	120	74	<div>NM</div>	--	8-1101b46hv	15,50	<div>👍</div>

ZH00M



LINSE FOKUS 60°





LINSE FOKUS 10°



LED 500mA | 25° | excl. | incl. | IP20 | EEL: A++ - A

INFO	POWER	mA	LUMEN	CRI	LED	ØxH	ID	Ø	COLOUR	REF	CODE	EURO	STOCK
LED recessed orientable aluminium spotlight, black, silver matt or chrome finish, sanded glass lens, rotating head with zoom function 10° - 60°, high colour rendering energy efficient LED	LED 2W	500	153	>90	3000K	49x12	41	42		--	56-85034ng1	161,00	
	LED 2W	500	153	>90	3000K	49x12	41	42		--	56-85037ng1	161,00	
	LED 2W	500	153	>90	3000K	49x12	41	42		--	56-85039ng1	166,00	
	LED 2W	500	163	>90	4000K	49x12	41	42		--	56-85035ng1	161,00	
	LED 2W	500	163	>90	4000K	49x12	41	42		--	56-85036ng1	161,00	
	LED 2W	500	163	>90	4000K	49x12	41	42		--	56-85038ng1	166,00	

LED CONVERTER ZH00M	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
 	not dimmable, 230 V AC	4	500	54	51	32	18		75-mpl5	12,00	
	not dimmable, 230 V AC	20	500	40	111*	52	22		24-122201	24,00	
*not suitable for mounting in housing											


IP20



KADO



LED 500mA | 50° | excl. | incl. | IP40 | EEL: A++ - A




INFO	POWER	mA	LUMEN	CRI	LED	Ø	ID	Ø	COLOUR	REF	CODE	EURO	STOCK
Tilttable LED recessed aluminium spotlight, pearl chrome or chrome surface, 50° swiveling, 12° or 30° faceted lenses	LED 2W	500	162	>90	3000K	50	30	42			56-6126ng2	76,00	
	LED 2W	500	162	>90	3000K	50	30	42			56-6026ng2	76,00	
	LED 2W	500	162	>90	3000K	50	30	42			56-6226ng2	77,00	
	LED 2W	500	162	>90	3000K	50	30	42			56-6127ng2	76,00	
	LED 2W	500	162	>90	3000K	50	30	42			56-6027ng2	76,00	
	LED 2W	500	162	>90	3000K	50	30	42			56-6227ng2	77,00	

IN-WALL HOUSING	INFO	L	W	H	ET	CODE	EURO	STOCK
	Diam. 42mm, Attention: only LED converter of series 75-MPL fits in flush-mounted terminal box, suitable for KADO	100	100	60	52	56-ak7542	25,00	




LED CONVERTER KADO	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
 	not dimmable, 230 V AC	4	500	54	51	32	18		75-mpl5	12,00	
	not dimmable, 230 V AC	20	500	40	111*	52	22		24-122201	24,00	
*not suitable for mounting in housing											

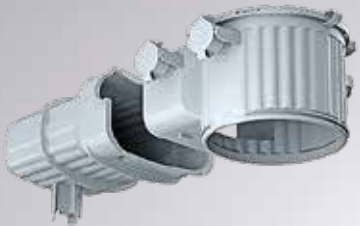IP20




HALOX 100 HOUSING WITH TUNNEL

INFO	Ø	COLOUR	CODE	EURO	STOCK
 <p>Mounting depth incl. front part 120mm, 4 combination entries for M20/25 conduits, combination entry with secure conduit retention and depth stop with no need to internal shortening of the conduits. Max. installation height LV 105mm - HV 110mm, lamp wattage max. 50W, for ceiling from 16cm thickness, tunnel for 1 electronic safety transformer up to 150 VA SELV slim or round design (e.g. PC mouse shape), with separation between primary and secondary area</p>	130		113-128130	35,50	




HALOX 100 HOUSING

INFO	Ø	COLOUR	CODE	EURO	STOCK
 <p>Mounting depth incl. front part 120mm, 2 combination entries for M20/25 conduits, combination entry with secure conduit retention and depth stop with no need to internal shortening of the conduits. Max. installation height LV 105mm - HV 110mm, lamp wattage max. 50W, for ceiling from 16cm thickness</p>	130		113-128100	15,50	






HALOX 100 UNIVERSAL FRONT PARTS

INFO	Ø	COLOUR	CODE	EURO	STOCK
 <p>Flexible ceiling exit with mineral fibreboard, ceiling cutout up to max. 100mm diameter continuously possible, time-saving without further reworking, possibly smoothing the surface, use of electronic safety transformer only possible from a diameter of 68 mm</p>	max. 100		113-128111	28,20	











HALOX 100 UNIVERSAL FRONT PARTS

INFO	Ø	COLOUR	CODE	EURO	STOCK
 <p>Flexible ceiling exit for diameter 40, 45, 50, 55, 60, 68, 75, 80, 85, 90, 95, 100 mm; use of electronic safety transformer only possible from a diameter of 68 mm</p>	max. 100		113-128110	17,00	





HALOX 100 FRONT PARTS

INFO	LxB	COLOUR	CODE	EURO	STOCK
 <p>HALOX front parts for square ceiling exit 68 x 68 mm, luminaire covering min. 75 x 75 mm</p>	68x68 (Luminaire cover min. 75x75)		113-128108	9,10	
	75x75 (Luminaire cover min. 82x82)		113-128109	9,10	




HALOX 100 FRONT PARTS

INFO	Ø	COLOUR	CODE	EURO	STOCK
 <p>HALOX front parts for round ceiling exit 68 mm, luminaire covering min. 75 mm</p>	68 (Luminaire cover min. 75)		113-128101	9,10	
	75 (Luminaire cover min. 82)		113-128102	9,10	
	80 (Luminaire cover min. 87)		113-128103	9,10	
	85 (Luminaire cover min. 92)		113-128104	9,10	
	95 (Luminaire cover min. 102)		113-128106	9,10	
	100 (Luminaire cover min. 107)		113-128107	9,10	





HALOX 100 CONCRETE HOUSING FOR ON-SITE MIXED CONCRETE

HALOX 100 CONCRETE HOUSING FOR ON-SITE MIXED CONCRETE		INFO																		
		<p>For halogen luminaires (high voltage and low voltage) and loudspeakers in on-site concrete, from a ceiling thickness of 60 mm , From a ceiling thickness of 160mm, halox offers you a comprehensive housing system. Round and square front parts, front parts with mineral fibreboards, transformer tunnels and accessories enable a wide range of installation options.</p>																		
		<div>Housing 360° turnable</div>																		
		<table><tr><th>FRONT PARTS CEILING EXIT</th><th>MIN. Ø OF LUMINAIRE COVERING</th></tr><tr><td>Ø 68 mm</td><td>75 mm</td></tr><tr><td>Ø 75 mm</td><td>82 mm</td></tr><tr><td>Ø 80 mm</td><td>87 mm</td></tr><tr><td>Ø 85 mm</td><td>92 mm</td></tr><tr><td>Ø 95 mm</td><td>102 mm</td></tr><tr><td>Ø 100 mm</td><td>107 mm</td></tr><tr><td>Ø 68 x 68 mm</td><td>75 x 75 mm</td></tr><tr><td>Ø 75 x 75 mm</td><td>82 x 82 mm</td></tr></table>	FRONT PARTS CEILING EXIT	MIN. Ø OF LUMINAIRE COVERING	Ø 68 mm	75 mm	Ø 75 mm	82 mm	Ø 80 mm	87 mm	Ø 85 mm	92 mm	Ø 95 mm	102 mm	Ø 100 mm	107 mm	Ø 68 x 68 mm	75 x 75 mm	Ø 75 x 75 mm	82 x 82 mm
		FRONT PARTS CEILING EXIT	MIN. Ø OF LUMINAIRE COVERING																	
		Ø 68 mm	75 mm																	
Ø 75 mm	82 mm																			
Ø 80 mm	87 mm																			
Ø 85 mm	92 mm																			
Ø 95 mm	102 mm																			
Ø 100 mm	107 mm																			
Ø 68 x 68 mm	75 x 75 mm																			
Ø 75 x 75 mm	82 x 82 mm																			
<p>UNIVERSAL-FRONT PART</p> <p>with flexible ceiling opening (cutout) diam. 40 - 100mm</p>																				
<p>UNIVERSAL FRONT PARTS WITH MINERAL FIBREBOARDS</p> <p>with flexible ceiling opening (cutout) up to diam. 100mm</p>																				

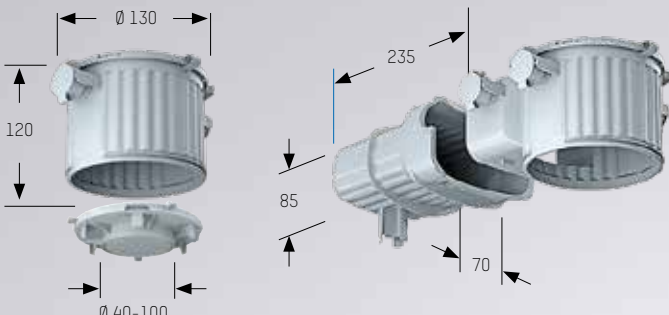MEASUREMENTS & INFO

INFO
 <p>Illustration picture</p> <ul style="list-style-type: none">fixed and gimbal-mounted luminaireslamp wattage max. 50WUse only tested (DIN VDE 0711 / EN60598) as well as with  or  marked luminaires.Use of electronic safety transformer (rounded form) only possible from a diameter of 68 mm!

INSTALLATION TECHNOLOGY FOR LUMINAIRES

<p>Selection of lamps Halogen low voltage (12V)</p>  <p>min. 30 mm min. 25 mm max. 105 mm</p> <p>mounting depth max. 105mm</p>	<p>Temperature profile</p>  <p>Raumtemperatur 23°C 31°C 37°C 85°C 46°C</p> <p>50W QR-CBC 51 (Cool-beam with safety glass) Important: Do not use cold-light reflector lamps but cool beam lamps!</p>	<p>Selection of lamps Halogen high voltage (230V)</p>  <p>min. 30 mm min. 20 mm max. 110 mm</p> <p>mounting depth max. 110mm</p>	<p>Temperature profile</p>  <p>Raumtemperatur 23°C 31°C 37°C 85°C</p> <p>50W lamp with GU10 socket</p>
---	---	---	---

NOW 2 SQUARE R



INFO	POWER	V	LUMEN	CRI	LED	L	W	ID	⌀	REF	CODE	EURO	STOCK
Aluminium LED downlighter, white, black or silver matt powder coated, vacuum deposited reflector in 3 beam angles, 30° tilting	SYS 14W	230	1350	PREMIUM >90	3000K	130	130	120	115	116°	635-2120429Xng6	129,00	
	SYS 14W	230	1440	>90	4000K	130	130	120	115	116°	635-2120224Xng6	129,00	
	SYS 14W	230	1350	PREMIUM >90	3000K	130	130	120	115	125°	635-2120459Xng6	129,00	
	SYS 14W	230	1440	>90	4000K	130	130	120	115	125°	635-2120254Xng6	129,00	
	SYS 14W	230	1350	PREMIUM >90	3000K	130	130	120	115	140°	635-2120489Xng6	129,00	
	SYS 14W	230	1440	>90	4000K	130	130	120	115	140°	635-2120284Xng6	129,00	
LED 2700K & 3500K versions on request													
COMPLETE CODE	SYS 19W	230	1840	PREMIUM >90	3000K	130	130	120	115	116°	635-2170429Xng6	129,00	
	SYS 19W	230	1970	>90	4000K	130	130	120	115	116°	635-2170224Xng6	129,00	
X = COLOUR	SYS 19W	230	1840	PREMIUM >90	3000K	130	130	120	115	125°	635-2170459Xng6	129,00	
SM silver matt = 4	SYS 19W	230	1970	>90	4000K	130	130	120	115	125°	635-2170254Xng6	129,00	
S black = 6	SYS 19W	230	1840	PREMIUM >90	3000K	130	130	120	115	140°	635-2170489Xng6	129,00	
W white = 5	SYS 19W	230	1970	>90	4000K	130	130	120	115	140°	635-2170284Xng6	129,00	

NOW 2 SQUARE DOUBLE R



INFO	POWER	V	LUMEN	CRI	LED	L	W	ID	⌀ LxW	REF	CODE	EURO	STOCK
Aluminium LED downlighter, white, black or silver matt powder coated, vacuum deposited reflector in 3 beam angles, 30° tilting	SYS 2x13W	230	2700	PREMIUM >90	3000K	245	130	120	230x115	116°	635-3290429Xng6	233,00	
	SYS 2x13W	230	2880	>90	4000K	245	130	120	230x115	116°	635-3290224Xng6	233,00	
	SYS 2x13W	230	2700	PREMIUM >90	3000K	245	130	120	230x115	125°	635-3290459Xng6	233,00	
	SYS 2x13W	230	2880	>90	4000K	245	130	120	230x115	125°	635-3290254Xng6	233,00	
	SYS 2x13W	230	2700	PREMIUM >90	3000K	245	130	120	230x115	140°	635-3290489Xng6	233,00	
	SYS 2x13W	230	2880	>90	4000K	245	130	120	230x115	140°	635-3290284Xng6	233,00	
LED 2700K & 3500K versions on request													
COMPLETE CODE	SYS 2x19W	230	3680	PREMIUM >90	3000K	245	130	120	230x115	116°	635-3400429Xng6	233,00	
	SYS 2x19W	230	3940	>90	4000K	245	130	120	230x115	116°	635-3400224Xng6	233,00	
X = COLOUR	SYS 2x19W	230	3680	PREMIUM >90	3000K	245	130	120	230x115	125°	635-3400459Xng6	233,00	
SM silver matt = 4	SYS 2x19W	230	3940	>90	4000K	245	130	120	230x115	125°	635-3400254Xng6	233,00	
S black = 6	SYS 2x19W	230	3680	PREMIUM >90	3000K	245	130	120	230x115	140°	635-3400489Xng6	233,00	
W white = 5	SYS 2x19W	230	3940	>90	4000K	245	130	120	230x115	140°	635-3400284Xng6	233,00	

MOLTO LUCE®



Project: Hotel Alpen Parks, Zell am See, Austria
Photo: Molto Luce
Product: NOW 2 SQUARE R

NOW 2 ROUND R



LED 230V
30° 350° incl. incl.
IP20 EEL: A++ - A


INFO	POWER	V	LUMEN	CRI	LED	Ø	ID	Ø	REF	CODE	EURO	STOCK
Aluminium LED downlighter, white, black or silver matt powder coated, vacuum deposited reflector in 3 beam angles, 30° tilting LED 2700K & 3500K versions on request	SYS 14W	230	1350	PREMIUM >90	3000K	125	120	115	16°	635-1120429Xng6	129,00	
	SYS 14W	230	1440	>90	4000K	125	120	115	16°	635-1120224Xng6	129,00	
	SYS 14W	230	1350	PREMIUM >90	3000K	125	120	115	25°	635-1120459Xng6	129,00	
	SYS 14W	230	1440	>90	4000K	125	120	115	25°	635-1120254Xng6	129,00	
	SYS 14W	230	1350	PREMIUM >90	3000K	125	120	115	40°	635-1120489Xng6	129,00	
	SYS 14W	230	1440	>90	4000K	125	120	115	40°	635-1120284Xng6	129,00	
COMPLETE CODE	SYS 19W	230	1840	PREMIUM >90	3000K	125	120	115	16°	635-1170429Xng6	129,00	
	SYS 19W	230	1970	>90	4000K	125	120	115	16°	635-1170224Xng6	129,00	
X = COLOUR	SYS 19W	230	1840	PREMIUM >90	3000K	125	120	115	25°	635-1170459Xng6	129,00	
SM silver matt = 4	SYS 19W	230	1970	>90	4000K	125	120	115	25°	635-1170254Xng6	129,00	
S black = 6	SYS 19W	230	1840	PREMIUM >90	3000K	125	120	115	40°	635-1170489Xng6	129,00	
W white = 5	SYS 19W	230	1970	>90	4000K	125	120	115	40°	635-1170284Xng6	129,00	

MOLTO LUCE®



Project: Intersport Patterer, Krimml, Austria
Photo: Molto Luce
Product: NOW 2 ROUND R

GET SQUARE FLAT XS R / GET SQUARE FLAT M R

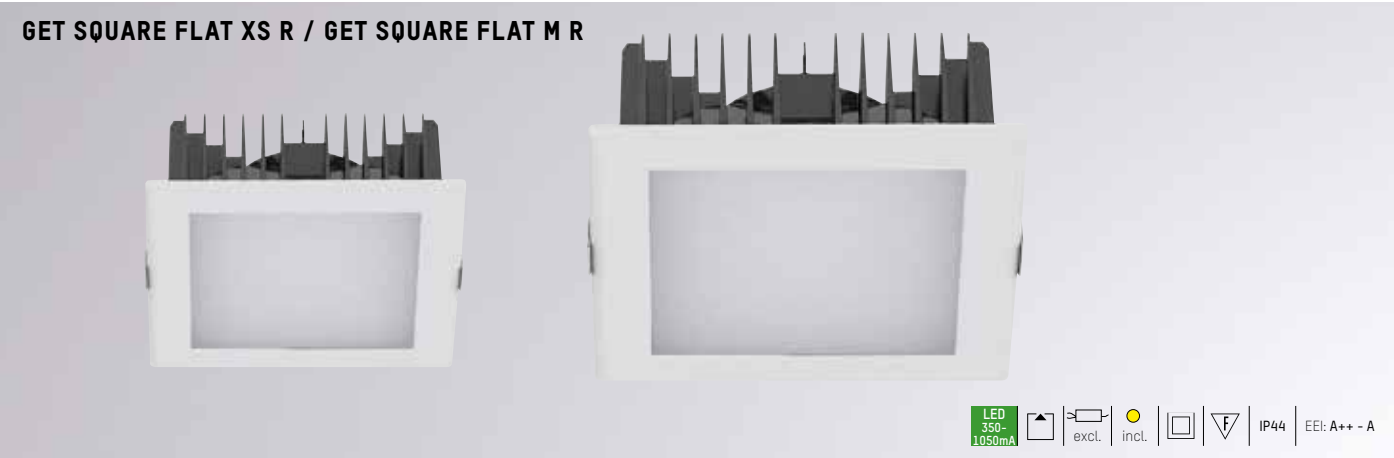

GET SQUARE FLAT XS R

INFO	DIFFUSER	LUMEN / W IN 350mA	LUMEN / W IN 500mA	LUMEN / W IN 700mA	CRI	LED	L	W	ID	LxW	COLOUR	REF	CODE	EURO	STOCK
Die cast aluminium fixed LED down-lighter, white matt powder coated, flood reflector, satined PMMA diffuser or micro-prismatic cover To use with 350, 500, oder 700mA. (order converter separately)		LED 10W	LED 15W	LED 20W											
	PMMA	1104	1501	1965	>80	3000K	169	169	90	150x150	W	90°	468-210011955	124,00	👍
	PMMA	1147	1560	2113	>80	4000K	169	169	90	150x150	W	90°	468-210011455	124,00	👍
	MICROPRISMA	945	1284	1681	>80	3000K	169	169	90	150x150	W	90°	468-210021955	147,00	
	MICROPRISMA	981	1334	1809	>80	4000K	169	169	90	150x150	W	90°	468-210021455	147,00	
		ORDER CONVERTER SEPARATELY													
	not dimmable	24-127530n	24-127532n	24-127534n											
	EURO	15,00	15,00	15,00											
	DALI dimm.	24-127490	24-127490	24-127490											
	EURO	46,00	46,00	46,00											



GET SQUARE REFL XS R / GET SQUARE REFL M R



GET SQUARE REFL XS R

INFO	DIFFUSER	LUMEN / W IN 350mA	LUMEN / W IN 500mA	LUMEN / W IN 700mA	CRI	LED	L	W	ID	LxW	COLOUR	REF	CODE	EURO	STOCK
Die cast aluminium fixed LED down-lighter, white matt powder coated, flood reflector, satined PMMA diffuser or micro-prismatic cover To use with 350, 500, oder 700mA. (order converter separately)		LED 10W	LED 15W	LED 20W											
	PMMA	1299	1766	2312	>80	3000K	169	169	90	150x150	W	100°	468-210111955	124,00	👍
	PMMA	1350	1835	2583	>80	4000K	169	169	90	150x150	W	100°	468-210111455	124,00	👍
	MICROPRISMA	1229	1671	2188	>80	3000K	169	169	90	150x150	W	100°	468-210121955	147,00	
	MICROPRISMA	1277	1737	2323	>80	4000K	169	169	90	150x150	W	100°	468-210121455	147,00	
		ORDER CONVERTER SEPARATELY													
	not dimmable	24-127530n	24-127532n	24-127534n											
	EURO	15,00	15,00	15,00											
	DALI dimm.	24-127490	24-127490	24-127490											
	EURO	46,00	46,00	46,00											



GET SQUARE FLAT M R

INFO	DIFFUSER	LUMEN / W IN 700mA	LUMEN / W IN 900mA	LUMEN / W IN 1050mA	CRI	LED	L	W	ID	LxW	COLOUR	REF	CODE	EURO	STOCK
Die cast aluminium fixed LED down-lighter, white matt powder coated, flood reflector, satined PMMA diffuser or micro-prismatic cover To use with 700, 900, oder 1050mA. (order converter separately)		LED 21W	LED 27W	LED 31W											
	PMMA	2388	2944	3462	>80	3000K	230	230	100	205x205	W	90°	468-220011955	150,00	👍
	PMMA	2661	3224	3824	>80	4000K	230	230	100	205x205	W	90°	468-220011455	150,00	👍
	MICROPRISMA	2079	2563	2982	>80	3000K	230	230	100	205x205	W	90°	468-220021955	177,00	
	MICROPRISMA	2273	2806	3214	>80	4000K	230	230	100	205x205	W	90°	468-220021455	177,00	
		ORDER CONVERTER SEPARATELY													
	not dimmable	24-127534n	24-127536n	24-127538n											
	EURO	15,00	18,00	18,00											
	DALI dimm.	24-127490	24-127490	24-127490											
	EURO	46,00	46,00	46,00											



GET SQUARE REFL M R

INFO	DIFFUSER	LUMEN / W IN 700mA	LUMEN / W IN 900mA	LUMEN / W IN 1050mA	CRI	LED	L	W	ID	LxW	COLOUR	REF	CODE	EURO	STOCK
Die cast aluminium fixed LED down-lighter, white matt powder coated, flood reflector, satined PMMA diffuser or micro-prismatic cover To use with 700, 900, oder 1050mA. (order converter separately)		LED 21W	LED 27W	LED 31W											
	PMMA	2858	3523	4100	>80	3000K	230	230	100	205x205	W	100°	468-220111955	150,00	👍
	PMMA	3125	3859	4372	>80	4000K	230	230	100	205x205	W	100°	468-220111455	150,00	👍
	MICROPRISMA	2654	3272	3807	>80	3000K	230	230	100	205x205	W	100°	468-220121955	177,00	
	MICROPRISMA	2901	3583	4103	>80	4000K	230	230	100	205x205	W	100°	468-220121455	177,00	
		ORDER CONVERTER SEPARATELY													
	not dimmable	24-127534n	24-127536n	24-127538n											
	EURO	15,00	18,00	18,00											
	DALI dimm.	24-127490	24-127490	24-127490											
	EURO	46,00	46,00	46,00											



SURFACE HOUSING GET	INFO	FOR	L	W	H	HOLE LxW	COLOUR	CODE	EURO	STOCK
	Steel sheet, white matt structured powder coated; square, suitable for GET XS or Get M square, excl. luminaries and driver ATTENTION: not for GET XS 700mA and GET M 1050mA suitable	GET SQUARE XS (bis max. 500mA)	174	174	120	115x115	W	468-2125	49,00	👍
		GET SQUARE M (bis max. 900mA)	234	234	130	165x165	W	468-2225	54,00	👍

CORRECTION FRAME GET	INFO	FOR	L	W	H	HOLE LxW	MAX. ID	COLOUR	CODE	EURO	STOCK
	Steel sheet, white matt structured powder coated; for too big ceiling cutouts; perfect for reconstruction projects, suitable for GET XS or Get M square, excl. luminaries and driver	GET SQUARE XS	240	240	2	115x115	180x180	W	468-2115	14,00	👍
		GET SQUARE M	300	300	2	165x165	230x230	W	468-2215	16,00	👍



GET ROUND FLAT XS R / GET ROUND FLAT M R



GET ROUND FLAT XS R

INFO	DIFFUSER	LUMEN / W IN 350mA	LUMEN / W IN 500mA	LUMEN / W IN 700mA	CRI	LED	Ø	ID	⌀	COLOUR	REF	CODE	EURO	STOCK
Die cast aluminium fixed LED down-lighter, white matt powder coated, flood reflector, satined PMMA diffuser or micro-prismatic cover To use with 350, 500, oder 700mA. (order converter separately)		LED 10W	LED 15W	LED 20W										
	PMMA	1321	1796	2351	>80	3000K	169	90	150	W	90°	468-110011955	119,00	👍
	PMMA	1372	1866	2461	>80	4000K	169	90	150	W	90°	468-110011455	119,00	👍
	MICROPRISMA	1182	1616	2084	>80	3000K	169	90	150	W	90°	468-110021955	142,00	
	MICROPRISMA	1217	1654	2180	>80	4000K	169	90	150	W	90°	468-110021455	142,00	
		ORDER CONVERTER SEPARATELY												
	not dimmable	24-127530n	24-127532n	24-127534n										
	EURO	15,00	15,00	15,00										
	DALI dimm.	24-127490	24-127490	24-127490										
	EURO	46,00	46,00	46,00										



GET ROUND FLAT M R

INFO	DIFFUSER	LUMEN / W IN 700mA	LUMEN / W IN 900mA	LUMEN / W IN 1050mA	CRI	LED	Ø	ID	⌀	COLOUR	REF	CODE	EURO	STOCK
Die cast aluminium fixed LED down-lighter, white matt powder coated, flood reflector, satined PMMA diffuser or micro-prismatic cover To use with 700, 900, oder 1050mA. (order converter separately)		LED 21W	LED 27W	LED 31W										
	PMMA	2756	3398	3954	>80	3000K	230	100	205	W	90°	468-120011955	150,00	👍
	PMMA	3013	3721	4326	>80	4000K	230	100	205	W	90°	468-120011455	150,00	👍
	MICROPRISMA	2482	3065	3510	>80	3000K	230	100	205	W	90°	468-120021955	177,00	
	MICROPRISMA	2675	3303	3860	>80	4000K	230	100	205	W	90°	468-120021455	177,00	
		ORDER CONVERTER SEPARATELY												
	not dimmable	24-127534n	24-127536n	24-127538n										
	EURO	15,00	18,00	18,00										
	DALI dimm.	24-127490	24-127490	24-127490										
	EURO	46,00	46,00	46,00										



SURFACE HOUSING GET	INFO	FÜR	Ø	H	HOLE Ø	COLOUR	CODE	EURO	STOCK
	Steel sheet, white matt structured powder coated; square, suitable for GET XS or Get M round, excl. luminaries and driver ATTENTION: not for GET XS 700mA and GET M 1050mA suitable	GET ROUND XS (bis max. 500mA)	174	120	115	W	468-1125	49,00	👍
		GET ROUND M (bis max. 900mA)	240	130	165	W	468-1225	54,00	👍

CORRECTION FRAME GET	INFO	FÜR	Ø	H	HOLE Ø	MAX. ID	COLOUR	CODE	EURO	STOCK
	Steel sheet, white matt structured powder coated; for too big ceiling cutouts; perfect for reconstruction projects, suitable for GET XS or Get M round, excl. luminaries and driver	GET ROUND XS	240	2	150	230	W	468-1115	14,00	👍
		GET ROUND M	300	2	205	290	W	468-1215	16,00	👍

GET ROUND REFL XS R / GET ROUND REFL M R



GET ROUND REFL XS R

INFO	DIFFUSER	LUMEN / W IN 350mA	LUMEN / W IN 500mA	LUMEN / W IN 700mA	CRI	LED	Ø	ID	⌀	COLOUR	REF	CODE	EURO	STOCK
Die cast aluminium fixed LED down-lighter, white matt powder coated, flood reflector, satined PMMA diffuser or micro-prismatic cover To use with 350, 500, oder 700mA. (order converter separately)		LED 10W	LED 15W	LED 20W										
	PMMA	1293	1758	2301	>80	3000K	169	90	150	W	100°	468-110111955	119,00	👍
	PMMA	1343	1826	2392	>80	4000K	169	90	150	W	100°	468-110111455	119,00	👍
	MICROPRISMA	1150	1563	2046	>80	3000K	169	90	150	W	100°	468-110121955	142,00	
	MICROPRISMA	1194	1624	2123	>80	4000K	169	90	150	W	100°	468-110121455	142,00	
		ORDER CONVERTER SEPARATELY												
	not dimmable	24-127530n	24-127532n	24-127534n										
	EURO	15,00	15,00	15,00										
	DALI dimm.	24-127490	24-127490	24-127490										
	EURO	46,00	46,00	46,00										





GET ROUND REFL M R


INFO	DIFFUSER	LUMEN / W IN 700mA	LUMEN / W IN 900mA	LUMEN / W IN 1050mA	CRI	LED	Ø	ID	⌀	COLOUR	REF	CODE	EURO	STOCK
Die cast aluminium fixed LED down-lighter, white matt powder coated, flood reflector, satined PMMA diffuser or micro-prismatic cover To use with 700, 900, oder 1050mA. (order converter separately)		LED 21W	LED 27W	LED 31W										
	PMMA	2741	3380	3933	>80	3000K	230	100	205	W	100°	468-120111955	150,00	👍
	PMMA	2997	3701	4190	>80	4000K	230	100	205	W	100°	468-120111455	150,00	👍
	MICROPRISMA	2502	3084	3589	>80	3000K	230	100	205	W	100°	468-120121955	177,00	
	MICROPRISMA	2735	3378	3868	>80	4000K	230	100	205	W	100°	468-120121455	177,00	
		ORDER CONVERTER SEPARATELY												
	not dimmable	24-127534n	24-127536n	24-127538n										
	EURO	15,00	18,00	18,00										
	DALI dimm.	24-127490	24-127490	24-127490										
	EURO	46,00	46,00	46,00										





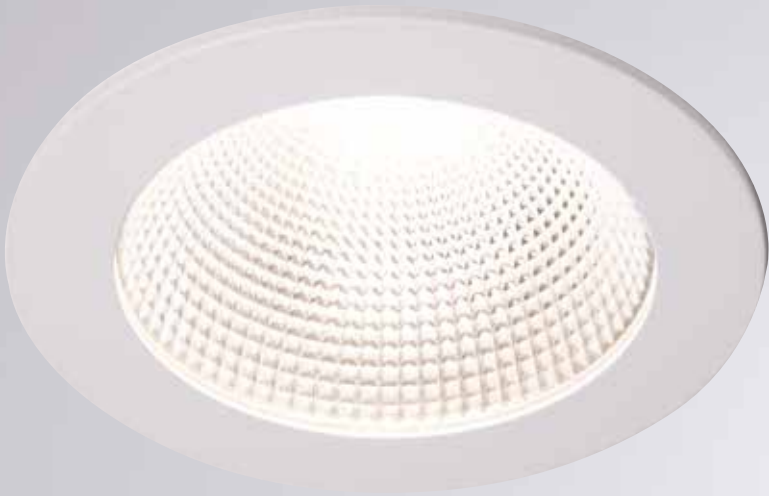




SUNRAY



UGR<19												
INFO SUNRAY I	LUMEN / W IN 250mA	LUMEN / W IN 350mA	CRI	LED	Ø	ID	Ø	COLOUR	REF	CODE	EURO	STOCK
Downlighter, pure aluminium cutting trim, white matt powder coated, passive cooling, round, fixed, safety glass, excl. converter	LED 10W	LED 14W										
	1000lm	1400lm	>80	3000K	105	105	95	W	8-09519455	41,00		👍
	1050lm	1500lm	>80	4000K	105	105	95	W	8-09514455	41,00		👍
ORDER CONVERTER SEPARATELY												
	24-127570	24-127530n	not dimmable									
	15,00	15,00	EURO									
	24-151403	24-151403	DALI dimm.									
	40,00	40,00	EURO									

UGR<19													
INFO SUNRAY II	LUMEN / W IN 350mA	LUMEN / W IN 500mA	LUMEN / W IN 700mA	CRI	LED	Ø	ID	⌀	COLOUR	REF	CODE	EURO	STOCK
Downlighter, pure aluminium cutting trim, white matt powder coated, passive cooling, round, fixed, safety glass, excl. converter	LED 14W	LED 20W	LED 28W										
	1450lm	1950lm	2750lm	>80	3000K	140	113	125	W	8-12519455	62,00	👍	
	1550lm	2100lm	2900lm	>80	4000K	140	113	125	W	8-12514455	62,00	👍	
	ORDER CONVERTER SEPARATELY												
	24-127530n	24-127532n	24-127534n	not dimmable									
	15,00	15,00	15,00	EURO									
	24-151403	24-127490	24-127490	DALI dimm.									
	40,00	46,00	46,00	EURO									

	UGR<19												
INFO SUNRAY III	LUMEN / W IN 350mA	LUMEN / W IN 500mA	LUMEN / W IN 700mA	CRI	LED	Ø	ID	⌀	COLOUR	REF	CODE	EURO	STOCK
Downlighter, pure aluminium cutting trim, white matt powder coated, passive cooling, round, fixed, safety glass, excl. converter	LED 14W	LED 20W	LED 29W										
	1650lm	2250lm	2850lm	>80	3000K	165	113	150			8-15019455	76,00	
	1750lm	2400lm	3000lm	>80	4000K	165	113	150			8-15014455	76,00	
	ORDER CONVERTER SEPARATELY												
	24-127530n 15,00	24-127532n 15,00	24-127534n 15,00	not dimmable EURO									
	24-151403 40,00	24-127490 46,00	24-127490 46,00	DALI dimm. EURO									

	UGR<19												
INFO SUNRAY IV	LUMEN / W IN 500mA	LUMEN / W IN 700mA	LUMEN / W IN 1050mA	CRI	LED	Ø	ID	⌀	COLOUR	REF	CODE	EURO	STOCK
Downlighter, pure aluminium cutting trim, white matt powder coated, passive cooling, round, fixed, safety glass, excl. converter	LED 21W	LED 29W	LED 43W										
	2300lm	3050lm	4150lm	>80	3000K	230	140	205			8-20519505	103,00	
	2400lm	3150lm	4300lm	>80	4000K	230	140	205			8-20514505	103,00	
	ORDER CONVERTER SEPARATELY												
	24-127532n	24-127534n	24-122204	not dimmable									
	15,00	15,00	47,00	EURO									
	24-127490	24-127490	24-15141350	DALI dimm.									
	46,00	46,00	79,50	EURO									















Project: Kurhotel Marienkron, Mönchhof, Austria
Planing: Mayr & Glatzl
Photo: Gabriel Büchelmeier
Product: SUNRAY II

SPEAKER 1 / SPEAKER 2









LED 230V   incl.  incl.   IP20 | EEI: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	Ø	ID	⌀	COLOUR	REF	CODE	EURO	STOCK
Downlighter, aluminium sheet, deep-drawn, white lacquered, round, adjustable steel brackets, diffuser polycarbonate, incl. converter	SYS 14W	230	1200	>80	3000K	188	94	154 - 186			121-2208441000	51,00	
	SYS 14W	230	1300	>80	4000K	188	94	154 - 186			121-2208441100	51,00	
	SYS 25W	230	2013	>80	3000K	230	102	192 - 224			121-2208441500	62,00	
	SYS 25W	230	2119	>80	4000K	230	102	192 - 224			121-2208441600	62,00	

SPEAKER 1 / SPEAKER 2 MIRROR









LED 230V   incl.  incl.   IP20 | EEI: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	Ø	ID	⌀	COLOUR	REF	CODE	EURO	STOCK
Downlighter made of die-cast aluminium, white powder-coated, round, rigid, mirrored reflector, diffuser made of polycarbonate, incl. converter	SYS 20W	230	1500	>80	4000K	187	94	158-180			121-2208441300	36,00	
	SYS 25W	230	2205	>80	4000K	230	102	192-224			121-2208441800	38,00	

SPEAKER 3 B





















LED 230V   incl.  incl.   IP44 | EEI: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	Ø	ID	⌀	COLOUR	REF	CODE	EURO	STOCK
Downlight made of die-cast aluminium, white powder-coated, round, rigid, polycarbonate diffuser, incl. converter	SYS 23W	230	1952	>80	3000K	225	108	188-220			121-2208471000	36,00	
	SYS 23W	230	2050	>80	4000K	225	108	188-220			121-2208471100	36,00	

ENERGY 2130 / 2180 / 2245




LED 230V   incl.  incl.   IP20 | EEI: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	Ø	ID	⌀	COLOUR	REF	CODE	EURO	STOCK
Downlight made of die-cast aluminium, white powder-coated, round, rigid, polycarbonate diffuser, incl. converter	SYS 12W	230	900	>90	3000K	140	66	110-135			121-2217231000	45,00	
	SYS 12W	230	1000	>90	4000K	140	66	110-135			121-2217231300	45,00	
	SYS 14W	230	1302	>90	3000K	180	78	160-175			121-2217251039	68,00	
	SYS 14W	230	1400	>90	4000K	180	78	160-175			121-2217251000	68,00	
	SYS 19W	230	1860	>90	3000K	245	78	200-240			121-2217221039	75,00	
	SYS 19W	230	2000	>90	4000K	245	78	200-240			121-2217221000	75,00	



Project: FCC Promenada, Bukarest, Romania
Photo: Molto Luce
Product: ENERGY 2245

MOON SQUARE

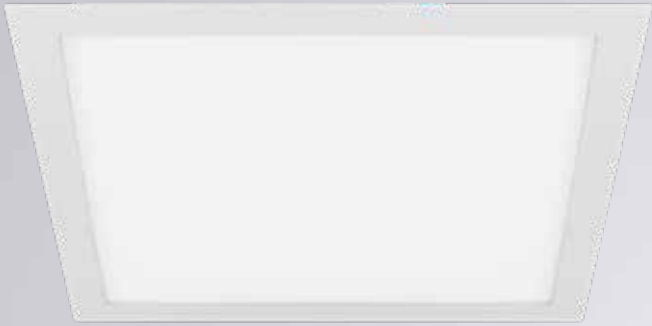

LED 250-700mA
excl. incl.
IP44
EEL: A++ - A

INFO	POWER	mA	LUMEN	CRI	LED	L	W	ID	LxW	COLOUR	REF	CODE	EURO	STOCK
Recessed luminai- re, aluminium, white matt painted, passive cooling, square, very homogeneous illumina- tion, opal diffuser, 120° beam angle, extremely flat, excl. converter. Attention: approx. 30 mm space needed for converter	LED 6W	250	620	>80	3000K	110	110	57	95x95	WM	U20°	392-0030680003005	19,00	👍
	LED 6W	250	670	>80	4000K	110	110	57	95x95	WM	U20°	392-0030680004005	19,00	👍
	LED 12W	450	1215	>80	3000K	180	180	57	170x170	WM	U20°	392-0041280003005	29,00	👍
	LED 12W	450	1335	>80	4000K	180	180	57	170x170	WM	U20°	392-0041280004005	29,00	👍
	LED 18W	700	2300	>80	3000K	300	300	57	290x290	WM	U20°	392-0051880003005	43,00	👍
	LED 18W	700	2375	>80	4000K	300	300	57	290x290	WM	U20°	392-0051880004005	43,00	👍

SURFACE HOUSING	INFO	FOR	L	W	H	HOLE LxW	COLOUR	CODE	EURO	STOCK
	Surface housing, sheet steel, white matt lacquered, square, suitable for Moon luminaire square, excl. luminaire and converter	MOON SQUARE 110	114	114	46	59x59	WM	643-q110agw	23,00	👍
		MOON SQUARE 180	184	184	46	130x130	WM	643-q180agw	31,00	👍
		MOON SQUARE 300	305	305	46	251x251	WM	643-q300agw	43,00	👍

LED CONVERTER MOON SQUARE	INFO	W	mA	V DC	FOR	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	13	250	54	1 - 2 MOON 110	111	52	22	W	24-122201	24,00	👍
		20	450	44	1 MOON 180	111	52	22				
		20	700	28	1 MOON 300	111	52	22				
	not dimmable, 230 V AC	6	250	24	1 MOON 110 (Surface housing)	42	40	22	S	24-122812	17,00	👍
	dimmable DALI	12	250	49	1 MOON 110	111	52	22	W	24-151403	40,00	👍
		20	450	45	1 MOON 180	111	52	22				
		20	700	28	1 MOON 300	111	52	22				

IP20

Projekt: Private residence, Austria
Photo: Molto Luce
Product: MOON SQUARE

MOON ROUND



LED 250-700mA
excl. incl.
IP44
EEL: A++ - A

INFO	POWER	mA	LUMEN	CRI	LED	Ø	ID	Ø	COLOUR	REF	CODE	EURO	STOCK
Recessed luminai- re, aluminium, white matt painted, passive cooling, round, very homogeneous illumina- tion, opal diffuser, 120° beam angle, extremely flat, excl. converter. Attention: approx. 30 mm space needed for converter	LED 6W	250	650	>80	3000K	110	57	95	WM	U20°	392-0000680003005	19,00	👍
	LED 6W	250	740	>80	4000K	110	57	95	WM	U20°	392-0000680004005	19,00	👍
	LED 12W	450	1420	>80	3000K	180	57	165	WM	U20°	392-0011280003005	29,00	👍
	LED 12W	450	1550	>80	4000K	180	57	165	WM	U20°	392-0011280004005	29,00	👍
	LED 18W	700	2055	>80	3000K	300	57	285	WM	U20°	392-0021880003005	43,00	👍
	LED 18W	700	2085	>80	4000K	300	57	285	WM	U20°	392-0021880004005	43,00	👍

SURFACE HOUSING	INFO	FOR	Ø	H	HOLE Ø	COLOUR	CODE	EURO	STOCK
	Surface housing, sheet steel, white matt lacquered, round, suitable for Moon luminaire square, excl. luminaire and converter	MOON ROUND 110	112	46	61	WM	643-j110agw	23,00	👍
		MOON ROUND 180	182	46	126	WM	643-j180agw	31,00	👍
		MOON ROUND 300	304	46	240	WM	643-j300agw	43,00	👍

LED CONVERTER MOON ROUND	INFO	W	mA	V DC	FOR	L	B	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	13	250	54	1 - 2 MOON 110	111	52	22	W	24-122201	24,00	👍
		20	450	44	1 MOON 180	111	52	22				
		20	700	28	1 MOON 300	111	52	22				
	not dimmable, 230 V AC	6	250	24	1 MOON 110 (Surface housing)	42	40	22	S	24-122812	17,00	👍
	dimmable DALI	12	250	49	1 MOON 110	111	52	22	W	24-151403	40,00	👍
		20	450	45	1 MOON 180	111	52	22				
		20	700	28	1 MOON 300	111	52	22				

IP20

Picture retouch
Photo: Shutterstock
Product: MOON ROUND


UNIVERSAL CONCRETE HOUSING



INFO	L	W	H	CODE	EURO	STOCK
Without cover made of galvanized sheet metal, not suitable for fair-faced concrete, one hose entry each DM20mm and 25mm left and right, order cover separately	170	170	116	332-1001	25,00	👍
	450	303	136	332-2001	43,00	👍


COVER SQUARE



INFO	FOR	L	W	H	 LxW	CODE	EURO	STOCK
Cover incl. centering part for concrete concrete housing 332-2001, made of galvanized sheet metal, not suitable for fair-faced concrete	GET M	300	250	16	205x205	332-3q205	22,00	👍
	GET XS	300	250	16	150x150	332-3q155	22,00	👍
	NOW 2 SQUARE SINGLE	300	250	16	115x115	332-3q115	22,00	👍

COVER RUND



INFO	FOR	L	W	H	 Ø	CODE	EURO	STOCK
Cover incl. centering part for concrete concrete housing 332-2001, made of galvanized sheet metal, not suitable for fair-faced concrete	GET M, SUNRAY IV, SPEAKER 3B, SPEAKER 2, ENERGY 2245	300	250	16	205	332-3r205	22,00	👍
	GET XS, SUNRAY III	300	250	16	150	332-3r150	22,00	👍
	NOW 2 ROUND SINGLE, ENERGY 2130	300	250	16	115	332-3r115	22,00	👍
	SPEAKER 1, ENERGY 2180	300	250	16	170	332-3r170	22,00	




Picture retouch
Photo: Shutterstock
Product: CONCRETE HOUSING









CADAN R



LED 230V   incl.  incl.   IP20 EEI: A++ - A

INFO	POWER	V	LUMEN PM	LUMEN MP	CRI	LED	L	W	ID	 LxW	CODE	EURO PM	EURO MP	STOCK
Square recessed LED luminaire made of aluminium, anodised, white or black powder coated finish, microprismatic cover or opal diffuser CRI>90 versions on request	SYS 13W	230	1300	1094	>80	3000K	379	379	120	360x360	445-113719CXY	319,00	339,00	
	SYS 13W	230	1400	1176	>80	4000K	379	379	120	360x360	445-113714CXY	319,00	339,00	
	SYS 21W	230	2362	1986	>80	3000K	479	479	120	460x460	445-114719CXY	376,00	386,00	
	SYS 21W	230	2540	2136	>80	4000K	479	479	120	460x460	445-114714CXY	376,00	386,00	
	SYS 45W	230	5236	4398	>80	3000K	621	621	120	604x604	445-116219CXY	543,00	564,00	
	SYS 45W	230	5630	4729	>80	4000K	621	621	120	604x604	445-116214CXY	543,00	564,00	
	SYS 116W	230	9784	8870	>80	3000K	910	910	120	892x892	445-119119CXY	1137,00	1241,00	
	SYS 116W	230	10520	9530	>80	4000K	910	910	120	892x892	445-119114CXY	1137,00	1241,00	

COMPLETE CODE

 C = COVER	 X = COLOUR OF LUMINAIRE	 Y = Dimmable
 PMMA COVER = 1	 W white = 5	switchable = without supplement
 MICROPRISMA (UGR<19) = 2	 S black = 6	analog dimm. 1 - 10V = ad (Price on request)
	 AE Aluminium anodized= 8	DALI dimm. = ddd (Price on request)

MOLTO LUCE®



Project: Porsche Showroom, Munich, Germany
Photo: MOLTO LUCE
Product: CADAN R

BADO R



LED 230V

INFO	POWER	V	LUMEN PM	LUMEN MP	CRI	LED	Ø	ID	Ø	CODE	EURO PM	EURO MP	STOCK
Round recessed Led luminaire made of aluminium, silver, white or black powder-coated edge, microprismatic cover or opal diffuser CRI>90 versions on request	SYS 16W	230	1638	1563	>80	3000K	320	120	305	445-063219CXY	336,00	378,00	
	SYS 16W	230	1761	1681	>80	4000K	320	120	305	445-063214CXY	336,00	378,00	
	SYS 29W	230	3263	3113	>80	3000K	420	120	405	445-064219CXY	392,00	450,00	👍
	SYS 29W	230	3509	3347	>80	4000K	420	120	405	445-064214CXY	392,00	450,00	
	SYS 37W	230	4388	4185	>80	3000K	520	120	505	445-065219CXY	506,00	589,00	👍
	SYS 37W	230	4718	4500	>80	4000K	520	120	505	445-065214CXY	506,00	589,00	
	SYS 44W	230	5366	5106	>80	3000K	670	120	655	445-066719CXY	682,00	775,00	
	SYS 44W	230	5770	5490	>80	4000K	670	120	655	445-066714CXY	682,00	775,00	
	SYS 79W	230	7458	6750	>80	3000K	980	120	965	445-069819CXY	1387,00	1490,00	
	SYS 79W	230	8020	7258	>80	4000K	980	120	965	445-069814CXY	1387,00	1490,00	
COMPLETE CODE													
C = COVER					X = COLOUR OF LUMINAIRE					Y = Dimmable			
PMMA COVER = 1					white = 5					switchable = without supplement			
MICROPRISMA (UGR<19) = 2					black = 6					analog dimm. 1 - 10V = ad (Price on request)			
					silver matt = 8					DALI dimm. = ddd (Price on request)			


MOLTO LUCE®








Projekt: ISO CELL, Meukirchen, Österreich
Foto: MOLTO LUCE
Produkt: BADO R

LOG IN 2 R



LED 230V       IP20 EEL: A++ - A

INFO	POWER 230V		LUMEN MP		LUMEN PM		LED	L	W	ID	LxW	CODE	EURO MP	EURO PM	STOCK
LIGHT INSERT	HE	HO	HE	HO	HE	HO									
HE = HIGH EFFICIENCY HO = HIGH OUTPUT	SYS 16W	SYS 30W	1390	2580	1490	2760	3000K	869	92	130	859x80	628-316L9X..Y	312,00	275,00	
	SYS 16W	SYS 30W	1460	2700	1560	2900	4000K	869	92	130	859x80	628-316L4X..Y	312,00	275,00	
Recessed LED luminaire made of extruded aluminium, anodised surface, black or white powder coated, opal or microprismatic diffuser, high colour rendering energy efficient LED, switchable, 1-10V or DALI dimmable versions available CRI>80	SYS 20W	SYS 41W	1860	3440	1990	3690	3000K	1150	92	130	1140x80	628-320L9X..Y	353,00	319,00	
	SYS 20W	SYS 41W	1950	3610	2090	3860	4000K	1150	92	130	1140x80	628-320L4X..Y	353,00	319,00	
HE Versions with micro-prismatic cover: UGR<19	SYS 25W	SYS 51W	2320	4300	2490	4610	3000K	1431	92	130	1421x80	628-325L9X..Y	385,00	349,00	
	SYS 25W	SYS 51W	2440	4510	2610	4830	4000K	1431	92	130	1421x80	628-325L4X..Y	385,00	349,00	
	SYS 40W	SYS 82W	3720	6880	3980	7380	3000K	2275	92	130	2265x80	628-340L9X..Y	645,00	569,00	
	SYS 40W	SYS 82W	3900	7220	4180	7720	4000K	2275	92	130	2265x80	628-340L4X..Y	645,00	569,00	
	SYS 50W	SYS 102W	4640	8600	4980	9220	3000K	2837	92	130	2827x80	628-350L9X..Y	699,00	639,00	
	SYS 50W	SYS 102W	4880	9020	5220	9660	4000K	2837	92	130	2827x80	628-350L4X..Y	699,00	639,00	
	SYS 60W	SYS 123W	5580	10320	5970	11070	3000K	3399	92	130	3389x80	628-360L9X..Y	885,00	799,00	
	SYS 60W	SYS 123W	5850	10830	6270	11580	4000K	3399	92	130	3389x80	628-360L4X..Y	885,00	799,00	
	SYS 75W	SYS 153W	6960	12900	7470	13830	3000K	4242	92	130	4232x80	628-375L9X..Y	1049,00	949,00	
	SYS 75W	SYS 153W	7320	13530	7830	14490	4000K	4242	92	130	4232x80	628-375L4X..Y	1049,00	949,00	
COMPLETE CODE															
L = LIGHT INSERT	X = COLOUR OF LUMINAIRE		.. = COVER		Y = Dimmable										
HIGH EFFICIENCY (HE) = 0	 white = 5		 Microprisma = mp		switchable = without supplement										
HIGH OUTPUT (HO) = 1	 black = 6		 PMMA Opal diffuser = pm		analog dimm. 1 - 10V = ad (Price on request)										
	 Aluminium anodized = 8				DALI dimm. = ddd (Price on request)										

MOLTO LUCE®








Project: Hölzl Baumanagement, Mittersil, Austria
Photo: Molto Luce
Product: LOG IN 2 R

SURFACE MOUNTED

POLUS















LED 230V  incl.  incl.    IP44 | EEL: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	L	W	H	COLOUR	CODE	EURO	STOCK
Surface mounted luminaire, die-cast aluminium, white or outside black/inside white or gold powder-coated, incl. converter	SYS 11W	230	606	>90	3000K	105	105	105		276-0091190003005	126,00	
	SYS 11W	230	580	>90	3000K	105	105	105	 	276-0091190003063	147,00	

QANA BOX I / QANA BOX II















230V HV       IP20 | EEL: A++ - D


INFO QANA BOX I	BULB	SOCKET	V	W	L	W	H	COLOUR	CODE	EURO	STOCK
Surface mounted luminaire, 1 spotlight, white, black or grey powder-coated, head: milled solid aluminium, 30° swivelling / 30° tilting	RETROFIT	GU10	230	max. 7	83	83	90		472-258951w	69,00	
	RETROFIT	GU10	230	max. 7	83	83	90		472-258951b	69,00	
	RETROFIT	GU10	230	max. 7	83	83	90		472-258951s	69,00	
INFO QANA BOX II	BULB	SOCKET	V	W	L	W	H	COLOUR	CODE	EURO	STOCK
Surface mounted luminaire, 2 spotlights, white, black or grey powder-coated, head: milled solid aluminium, 30° swivelling / 30° tilting	2 x RETROFIT	GU10	230	max. 7	165	83	90		472-258952w	128,00	
	2 x RETROFIT	GU10	230	max. 7	165	83	90		472-258952b	128,00	
	2 x RETROFIT	GU10	230	max. 7	165	83	90		472-258952s	128,00	

UP AC



LED 230V  incl.     IP20 | EEL: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	L	W	H	COLOUR	CODE	EURO	STOCK
Surface mounted luminaire, AC-LED, aluminium, white, black or grey powder coated with fine textured paint, with closed opal acrylic diffuser, homogeneous light distribution	SYS 10W	230	576	>90	2700K	100	100	63		472-0501090002705	149,00	
	SYS 10W	230	461	>90	2700K	100	100	63		472-0501090002706	149,00	
	SYS 10W	230	486	>90	2700K	100	100	63		472-0501090002704	149,00	
	SYS 10W	230	640	>90	3000K	100	100	63		472-0501090003005	149,00	
	SYS 10W	230	515	>90	3000K	100	100	63		472-0501090003006	149,00	
	SYS 10W	230	540	>90	3000K	100	100	63		472-0501090003004	149,00	


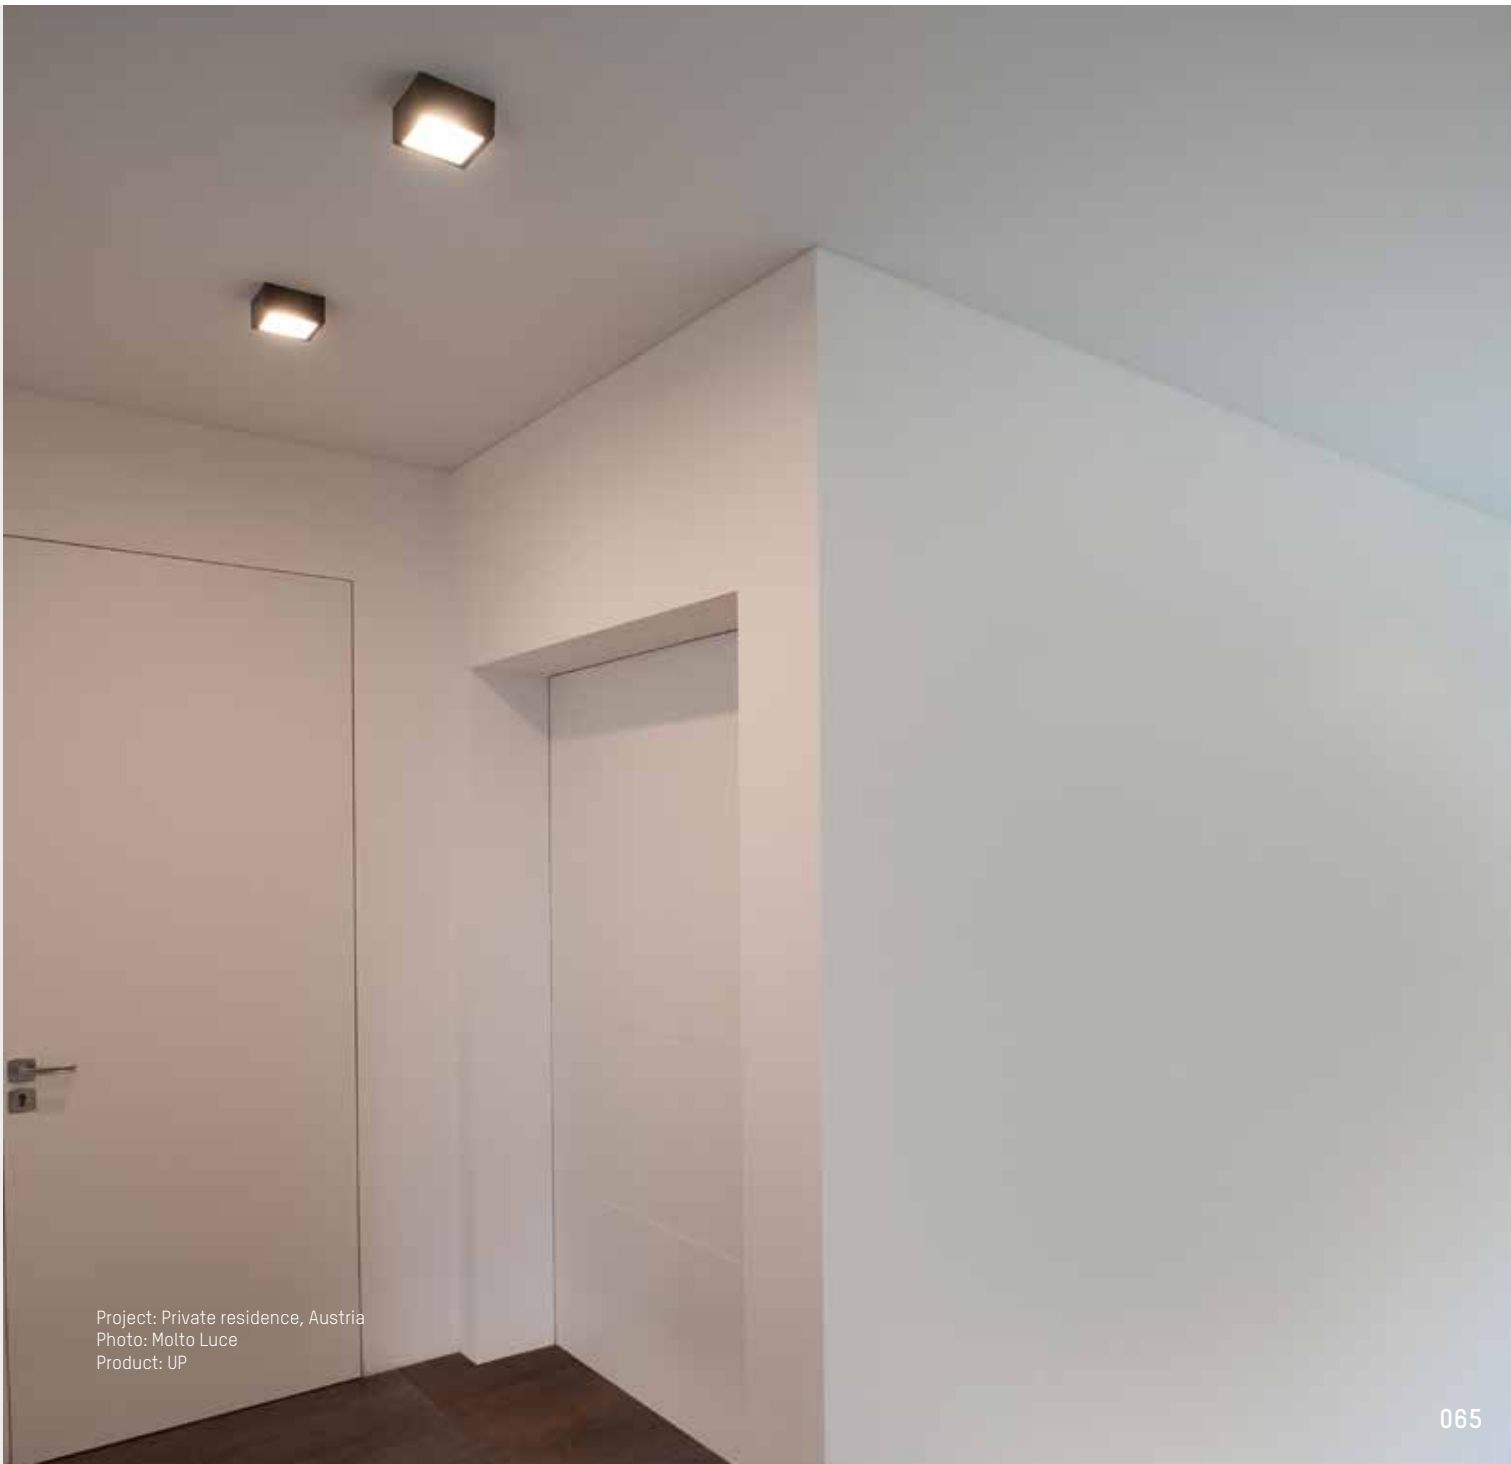
























Project: Private residence, Austria
Photo: Molto Luce
Product: UP

AEON SQUARE



LED 230V       IP20 EEL: A++ - A













AEON SQUARE SMALL INFO	POWER	V	LUMEN	CRI	LED	L	W	H	COLOUR	REF	CODE	EURO	STOCK
LED surface mounted luminaire made of aluminium, matt powder-coated with fine textured paint, square, incl. converter	SYS 6W	230	430	>80	2700K	80	80	95			305-602427w	69,00	
	SYS 6W	230	430	>80	2700K	80	80	95			305-602427b	69,00	
	SYS 6W	230	495	>80	3000K	80	80	95			305-602430w	69,00	
	SYS 6W	230	495	>80	3000K	80	80	95			305-602430b	69,00	













AEON SQUARE BIG INFO	POWER	V	LUMEN	CRI	LED	L	W	H	COLOUR	REF	CODE	EURO	STOCK
LED surface mounted luminaire made of aluminium, matt powder-coated with fine textured paint, square, incl. Converter DALI DIMMABLE	SYS 15W	230	1005	>80	2700K	120	120	158			305-604427wddd	199,00	
	SYS 15W	230	1005	>80	2700K	120	120	158			305-604427bddd	199,00	
	SYS 15W	230	1180	>80	3000K	120	120	158			305-604430wddd	199,00	
	SYS 15W	230	1180	>80	3000K	120	120	158			305-604430bddd	199,00	

AEON ROUND



LED 230V       IP20 EEL: A++ - A

AEON ROUND SMALL INFO	POWER	V	LUMEN	CRI	LED	Ø	H	COLOUR	REF	CODE	EURO	STOCK
LED surface mounted luminaire made of aluminium, matt powder-coated with fine textured paint, square, incl. converter	SYS 6W	230	475	>80	2700K	80	95			305-602527w	69,00	
	SYS 6W	230	475	>80	2700K	80	95			305-602527b	69,00	
	SYS 6W	230	510	>80	3000K	80	95			305-602530w	69,00	
	SYS 6W	230	510	>80	3000K	80	95			305-602530b	69,00	

AEON ROUND BIG INFO	POWER	V	LUMEN	CRI	LED	Ø	H	COLOUR	REF	CODE	EURO	STOCK
LED surface mounted luminaire made of aluminium, matt powder-coated with fine textured paint, square, incl. Converter DALI DIMMABLE	SYS 15W	230	1015	>80	2700K	125	158			305-604527wddd	199,00	
	SYS 15W	230	1015	>80	2700K	125	158			305-604527bddd	199,00	
	SYS 15W	230	1160	>80	3000K	125	158			305-604530wddd	199,00	
	SYS 15W	230	1160	>80	3000K	125	158			305-604530bddd	199,00	



Project: Hotel Aigo, Aigen, Austria
Photo: Molto Luce
Product: AEON ROUND

ARIK SHORT



INFO	POWER	V	LUMEN	CRI	LED	Ø	H	COLOUR	CODE	EURO	STOCK
Surface mounted luminaire, die-cast aluminium, matt powder-coated with fine textured paint, cylindric, acrylic diffuser matt satined, incl. converter	SYS 11W	230	360	>90	3000K	99	70	<div>W</div>	472-260029	139,00	<div>thumbs up</div>
	SYS 11W	230	360	>90	3000K	99	70	<div>S</div>	472-260030	139,00	<div>thumbs up</div>

CARMI



INFO	POWER	V	LUMEN	CRI	LED	Ø	H	COLOUR	CODE	EURO	STOCK
Surface mounted luminaire, die-cast aluminium, matt powder-coated with fine textured paint, cylindric	SYS 11W	230	552	>90	2700K	140	55	<div>W</div>	472-1227050	169,00	<div>thumbs up</div>
	SYS 11W	230	457	>90	2700K	140	55	<div>S</div>	472-1227060	169,00	<div>thumbs up</div>
	SYS 11W	230	540	>90	2700K	140	55	<div>S</div> <div>G</div>	472-12270630	169,00	<div>thumbs up</div>
	SYS 11W	230	615	>90	3000K	140	55	<div>W</div>	472-1229050	169,00	<div>thumbs up</div>
	SYS 11W	230	510	>90	3000K	140	55	<div>S</div>	472-1229060	169,00	<div>thumbs up</div>
	SYS 11W	230	540	>90	3000K	140	55	<div>S</div> <div>G</div>	472-12290630	169,00	<div>thumbs up</div>

TURN ON SD



INFO	POWER	V	LUMEN	CRI	LED	Ø	H	CODE	EURO	STOCK
Round LED aluminium luminaire, in two dimensions, microstructure painting in white or black, glossy recessed PMMA diffuser, Inner ring in black, white or gold	SYS 7W	230	470	>90	2700K	110	91	681-001000023XXY	206,00	<div>thumbs up</div>
	SYS 7W	230	510	>90	3000K	110	91	681-001000029XXY	206,00	<div>thumbs up</div>
	SYS 7W	230	510	>90	4000K	110	91	681-001000024XXY	206,00	<div>thumbs up</div>
	SYS 12W	230	790	>90	2700K	150	109	681-002000023XXY	254,00	<div>thumbs up</div>
	SYS 12W	230	860	>90	3000K	150	109	681-002000029XXY	254,00	<div>thumbs up</div>
	SYS 12W	230	860	>90	4000K	150	109	681-002000024XXY	254,00	<div>thumbs up</div>

COMPLETE CODE				Y = DIMMABLE
XX = COLOUR OF LUMINAIRE				switchable = 0
<div>W</div>	<div>G</div>	white / gold = 53 (+ EURO 21)	<div>S</div> <div>G</div>	black / gold = 63 (+ EURO 21)
<div>W</div>	<div>W</div>	white / white = 55	<div>S</div> <div>W</div>	black / white = 65
<div>W</div>	<div>S</div>	white / black = 56	<div>S</div> <div>S</div>	black / black = 66
				DALI dimm. = d (+ EURO 50)

THEMIS R165 / R195

HIGH LUMEN OUTPUT



INFO	POWER	V	LUMEN	CRI	LED	Ø	H	COLOUR	REF	CODE	EURO	STOCK
Surface downlight, die-cast aluminium, matt powder-coated, reflektor from aluminium, +/- 20° tilting, incl. converter	SYS 33W	230	2515	>90	3000K	165	184	<div>W</div>	<div>38°</div>	121-2207111000	133,00	<div>thumbs up</div>
	SYS 33W	230	2515	>90	3000K	165	184	<div>G</div>	<div>38°</div>	121-2207117000	133,00	<div>thumbs up</div>
	SYS 33W	230	2691	>90	4000K	165	184	<div>W</div>	<div>38°</div>	121-2207111068	133,00	<div>thumbs up</div>
	SYS 33W	230	2691	>90	4000K	165	184	<div>G</div>	<div>38°</div>	121-2207117068	133,00	<div>thumbs up</div>
	SYS 44W	230	3424	>90	3000K	195	198	<div>W</div>	<div>38°</div>	121-2207121000	235,00	<div>thumbs up</div>
	SYS 44W	230	3424	>90	3000K	195	198	<div>G</div>	<div>38°</div>	121-2207127000	235,00	<div>thumbs up</div>
	SYS 44W	230	3664	>90	4000K	195	198	<div>W</div>	<div>38°</div>	121-2207121068	235,00	<div>thumbs up</div>
	SYS 44W	230	3664	>90	4000K	195	198	<div>G</div>	<div>38°</div>	121-2207127068	235,00	<div>thumbs up</div>
	UGR<19											
	SYS 33W	230	2515	>90	3000K	165	184	<div>W</div>	<div>38°</div>	121-2207111000	133,00	<div>thumbs up</div>
	SYS 33W	230	2515	>90	3000K	165	184	<div>G</div>	<div>38°</div>	121-2207117000	133,00	<div>thumbs up</div>
	SYS 33W	230	2691	>90	4000K	165	184	<div>W</div>	<div>38°</div>	121-2207111068	133,00	<div>thumbs up</div>

Picture retouch
Photo: Shutterstock
Product: CARMI

MAGIS SINGLE / MAGIS DOUBLE



MAGIS SINGLE INFO	POWER	V	LUMEN	CRI	LED	Ø	H	COLOUR	REF	CODE	EURO	STOCK
Surface mounted spotlight, die-cast aluminium, matt powder-coated with fine textured paint, decoration ring made of metal (standard in housing colour), spotlight head 90° tilting and 350° swiveling, 40° reflector (included in scope of delivery), 20° or 28° reflector to order separately, wall or ceiling mounting, incl. converter	SYS 16W	230	1160	>90	2700K	100	103	W	40°	276-0227050	179,00	👍
	SYS 16W	230	1090	>90	2700K	100	103	S	40°	276-0227060	179,00	👍
	SYS 16W	230	1185	>90	3000K	100	103	W	40°	276-0229050	179,00	👍
	SYS 16W	230	1070	>90	3000K	100	103	S	40°	276-0229060	179,00	👍

MAGIS DOUBLE INFO	POWER	V	LUMEN	CRI	LED	L	W	H	COLOUR	REF	CODE	EURO	STOCK
Surface mounted spotlight, die-cast aluminium, matt powder-coated with fine textured paint, decoration ring made of metal (standard in housing colour), spotlight head 90° tilting and 350° swiveling, 40° reflector (included in scope of delivery), 20° or 28° reflector to order separately, wall or ceiling mounting, incl. converter	SYS 30W	230	2 x 1060	>90	2700K	212	100	103	W	40°	276-1027050	298,00	👍
	SYS 30W	230	2 x 1090	>90	2700K	212	100	103	S	40°	276-1027060	298,00	👍
	SYS 30W	230	2 x 1185	>90	3000K	212	100	103	W	40°	276-1029050	298,00	👍
	SYS 30W	230	2 x 1070	>90	3000K	212	100	103	S	40°	276-1029060	298,00	👍

MAGIS DECOR RING	INFO	COLOUR	CODE	EURO	STOCK
	Metal powder-coated, monuting with magnet. (order separately)	G	276-7004	9,00	👍
		W	276-7005	9,00	👍
		S	276-7006	9,00	👍

MAGIS REFLECTOR	INFO	REF	CODE	EURO	STOCK
	Mount without tools. (order separately)	20°	276-7010	12,00	👍
		28°	276-7011	12,00	👍

MAGIS MINI SINGLE / MAGIS MINI DOUBLE



MAGIS MINI SINGLE INFO	POWER	V	LUMEN	CRI	LED	Ø	H	COLOUR	REF	CODE	EURO	STOCK
Surface mounted spotlight, die-cast aluminium, matt powder-coated with fine textured paint, decoration ring made of metal (standard in housing colour), spotlight head 90° tilting and 350° swiveling, 50° reflector (included in scope of delivery), 23° or 34° reflector to order separately, wall or ceiling mounting, incl. converter	SYS 11W	230	605	>90	2700K	75	91	W	50°	276-1127050	129,00	👍
	SYS 11W	230	585	>90	2700K	75	91	S	50°	276-1127060	129,00	👍
	SYS 11W	230	615	>90	3000K	75	91	W	50°	276-1129050	129,00	👍
	SYS 11W	230	600	>90	3000K	75	91	S	50°	276-1129060	129,00	👍

MAGIS MINI DOUBLE INFO	POWER	V	LUMEN	CRI	LED	L	W	H	COLOUR	REF	CODE	EURO	STOCK
Surface mounted spotlight, die-cast aluminium, matt powder-coated with fine textured paint, decoration ring made of metal (standard in housing colour), spotlight head 90° tilting and 350° swiveling, 50° reflector (included in scope of delivery), 23° or 34° reflector to order separately, wall or ceiling mounting, incl. converter	SYS 22W	230	2 x 615	>90	2700K	160	75	91	W	50°	276-1227050	225,00	👍
	SYS 22W	230	2 x 585	>90	2700K	160	75	91	S	50°	276-1227060	225,00	👍
	SYS 22W	230	2 x 615	>90	3000K	160	75	91	W	50°	276-1229050	225,00	👍
	SYS 22W	230	2 x 585	>90	3000K	160	75	91	S	50°	276-1229060	225,00	👍

MAGIS MINI DECOR RING	INFO	COLOUR	CODE	EURO	STOCK
	Metal powder-coated, monuting with magnet. (order separately)	G	276-7007	7,50	👍
		W	276-7008	7,50	👍
		S	276-7009	7,50	👍

MAGIS MINI REFLECTOR	INFO	REF	CODE	EURO	STOCK
	Mount without tools. (order separately)	23°	276-7012	6,00	👍
		34°	276-7013	6,00	👍

MISSOR I / MISSOR II



MISSOR I INFO	POWER	V	LUMEN	CRI	LED	L	W	H	COLOUR	REF	CODE	EURO	STOCK
Surface mounted spotlight, die-cast aluminium, matt fine textured powder-coated, decoration ring in black synthetic, head 90° tilting and 355° swiveling, 33° beam angle, wall or ceiling mounting, incl. converter	SYS 12W	230	660	>90	3000K	175	60	148			276-06290560	149,00	
	SYS 12W	230	660	>90	3000K	175	60	148			276-0629060	149,00	

MISSOR II INFO	POWER	V	LUMEN	CRI	LED	L	W	H	COLOUR	REF	CODE	EURO	STOCK
Surface mounted spotlight, die-cast aluminium, matt fine textured powder-coated, decoration ring in black synthetic, head 90° tilting and 355° swiveling, 33° beam angle, wall or ceiling mounting, incl. converter	SYS 21W	230	2 x 670	>90	3000K	336	60	148			276-07290560	235,00	
	SYS 21W	230	2 x 670	>90	3000K	336	60	148			276-0729060	235,00	

MISSOR DECOR RING	INFO	Ø	COLOUR	CODE	EURO	STOCK
	Ring, gold or white, for Missor I, Missor II, mounting without tools. (order separately)	60		276-7000	5,00	
		60		276-7001	5,00	

MISSOR HONEY COMB LOUVRE	INFO	Ø	COLOUR	CODE	EURO	STOCK
	Louvre, metall, for Missor I und Missor II, mounting without tools. (order separately)	60		276-1002	4,00	



Project: Private residence, Austria
Planning: Mayr & Glatzl GmbH
Photo: Gabriel Büchelmeier
Product: MISSOR II

DASH AC SD



INFO	POWER	V	LUMEN	CRI	LED	Ø	H	REF	CODE	EURO	STOCK
Mains voltage LED spotlight, die cast aluminium, white, black, silver matt or chrome finish, vacuum deposited aluminium reflector, 3 beam angles, spotlight head 350° swiveling and 90° tilting	SYS 11W	230	650	>90	2700K	65	143		599-005010123XX0	171,00	
	SYS 11W	230	690	>90	3000K	65	143		599-005010129XX0	171,00	
	SYS 11W	230	720	>90	4000K	65	143		599-005010124XX0	171,00	
	SYS 11W	230	650	>90	2700K	65	143		599-005010223XX0	171,00	
	SYS 11W	230	690	>90	3000K	65	143		599-005010229XX0	171,00	
	SYS 11W	230	720	>90	4000K	65	143		599-005010224XX0	171,00	
	SYS 11W	230	650	>90	2700K	65	143		599-005010423XX0	171,00	
	SYS 11W	230	690	>90	3000K	65	143		599-005010429XX0	171,00	
	SYS 11W	230	720	>90	4000K	65	143		599-005010424XX0	171,00	
COMPLETE CODE											
XX = COLOUR OF LUMINAIRE											
chrome = 01 (+ EURO 20)						silver matt = 04					
white = 05						black = 06					

DASH L AC SD



INFO	POWER	V	LUMEN	CRI	LED	Ø	H	REF	CODE	EURO	STOCK
Mains voltage LED spotlight, die cast aluminium, white, black, silver matt or chrome finish, vacuum deposited aluminium reflector, 3 beam angles, spotlight head 350° swiveling and 90° tilting Optional decor ring in 3 colours	SYS 11W	230	650	>90	2700K	65	156		599-006010123XX0	181,00	
	SYS 11W	230	690	>90	3000K	65	156		599-006010129XX0	181,00	
	SYS 11W	230	720	>90	4000K	65	156		599-006010124XX0	181,00	
	SYS 11W	230	650	>90	2700K	65	156		599-006010223XX0	181,00	
	SYS 11W	230	690	>90	3000K	65	156		599-006010229XX0	181,00	
	SYS 11W	230	720	>90	4000K	65	156		599-006010224XX0	181,00	
COMPLETE CODE											
XX = COLOUR OF LUMINAIRE											
silver matt = 04				white = 05				black = 06			

DASH L DECOR RING	INFO	COLOUR	CODE	EURO	STOCK
	inside (order separately)		599-12	9,00	
			599-13	9,00	
			599-15	9,00	



Project: Private residence, Austria
Photo: Molto Luce
Product: DASH AC SD

SHOOTER 1



INFO	BULB	SOCKET	V	W	Ø	H	COLOUR	CODE	EURO	STOCK
Die cast aluminium spotlight, white, black or chrome finish, single or double headed spotlight, head 285° swiveling and 90° tilting	RETROFIT	GU10	230	max. 10	80	130		653-00301000011	123,00	
	RETROFIT	GU10	230	max. 10	80	130		653-00301000055	95,00	
	RETROFIT	GU10	230	max. 10	80	130		653-00301000066	95,00	

VISPO HV




















INFO	BULB	SOCKET	V	W	Ø	H	COLOUR	CODE	EURO	STOCK
Surface spotlight, galvanized or laquered, head 360° swiveling and 90° tilting, measurement without bulb, canopy Ø 80mm	RETROFIT	GU10	230	max. 10	60	95		26-840001	29,00	
	RETROFIT	GU10	230	max. 10	60	95		26-840004	29,00	
	RETROFIT	GU10	230	max. 10	60	95		26-840046	29,00	
	RETROFIT	GU10	230	max. 10	60	95		26-840007	29,00	

NOVEL



















LED 230V  incl.  incl.    IP20 | EEL: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	L	W	D	COLOUR	CODE	EURO	STOCK
Wall luminaire, aluminium, painted or powder-coated, direct/indirect beam, incl. converter	SYS 8W	230	359	>90	2700K	100	100	100		472-3927050	159,00	
	SYS 8W	230	132	>90	2700K	100	100	100		472-3927060	159,00	
	SYS 8W	230	189	>90	2700K	100	100	100	 	472-39270630	187,00	
	SYS 8W	230	263	>90	2700K	100	100	100		472-39270140	159,00	
SYS 8W	230	399	>90	3000K	100	100	100	100		472-3929050	159,00	
SYS 8W	230	147	>90	3000K	100	100	100	100		472-3929060	159,00	
SYS 8W	230	210	>90	3000K	100	100	100	100		472-39290630	187,00	
SYS 8W	230	292	>90	3000K	100	100	100	100		472-39290140	159,00	

ALICA











LED 230V  incl.  incl.    IP20 | EEL: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	L	W	D	COLOUR	CODE	EURO	STOCK
Wall luminaire, aluminium, painted or powder-coated, direct/indirect beam, incl. converter	SYS 7W	230	400	>90	2700K	200	100	70		472-0000790002705	155,00	
	SYS 7W	230	215	>90	2700K	200	100	70		472-0000790002706	155,00	
	SYS 7W	230	307	>90	2700K	200	100	70		472-0000790002763	185,00	
	SYS 7W	230	320	>90	2700K	200	100	70		472-0000790002714	155,00	
SYS 7W	230	420	>90	3000K	200	100	70	70		472-0000790003005	155,00	
SYS 7W	230	220	>90	3000K	200	100	70	70		472-0000790003006	155,00	
SYS 7W	230	320	>90	3000K	200	100	70	70		472-0000790003063	185,00	
SYS 7W	230	330	>90	3000K	200	100	70	70		472-0000790003014	155,00	

TAKE



230V HV    IP20 | EEL: A++ - E

INFO	BULB	SOCKET	V	W	B	W	D	COLOUR	CODE	EURO	STOCK
Wall luminaire, aluminium, painted or powder-coated, direct/indirect beam	RETROFIT	G9	230	max. 7	100	100	100		472-291009w	59,00	
	RETROFIT	G9	230	max. 7	100	100	100		472-291009b	59,00	
	RETROFIT	G9	230	max. 7	100	100	100		472-291009s	59,00	
	RETROFIT	G9	230	max. 7	100	100	100		472-291009a	59,00	



INFO	POWER	V	LUMEN	CRI	LED	L	W	D	COLOUR	CODE	EURO	STOCK
Wall luminaire, die-cast aluminium, matt powder-coated with fine textured paint, closed opal acrylic diffuser, homogeneous light distribution, incl. converter	SYS 6W	230	409	>90	3000K	150	145	75	W	472-291007w	125,00	👍



BO SINGLE INFO	POWER	V	LUMEN	CRI	LED	L	W	D	COLOUR	CODE	EURO	STOCK
Wall luminaire, die-cast aluminium, matt fine textured powder-coated, direct/indirect beam, head 345° swiveling, incl. converter	SYS 6W	230	285	>90	2700K	135	30	135	W	472-0827050	149,00	👍
	SYS 6W	230	175	>90	2700K	135	30	135	S	472-0827060	149,00	👍

BO DOUBLE INFO	POWER	V	LUMEN	CRI	LED	L	W	D	COLOUR	CODE	EURO	STOCK
Wall luminaire, 2-flames, die-cast aluminium, matt fine textured powder-coated, direct/indirect beam, head 345° swiveling, incl. converter	SYS 2 x 6W	230	565	>90	2700K	240	30	135	W	472-0927050	229,00	👍
	SYS 2 x 6W	230	330	>90	2700K	240	30	135	S	472-0927060	229,00	👍



CLARUS



INFO	POWER	V	LUMEN	CRI	LED	Ø	D	COLOUR	CODE	EURO	STOCK
Wall luminaire, die-cast aluminium, matt fine textured powder-coated, direct/indirect beam, asymmetrical, 90° tilting, 350° swiveling, incl. reading light, incl. converter	SYS 11W	230	400	>90	2700K	120	82	W	276-0151090402705tr	199,00	👍
	SYS 11W	230	365	>90	2700K	120	82	S	276-0151090402706tr	199,00	👍
	SYS 11W	230	365	>90	2700K	120	82	S	276-0151090402763tr	199,00	👍


Operating modes of luminaire CLARUS:
First mode of switch: switch on base-light
Second mode of switch: switch on reading light
Third mode of switch: off
Base-light and reading light cannot be used in the same time

ZHOOM LONG SD



LED 230V
incl. incl.
IP20
EEL: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	L	COLOUR	CODE	EURO	STOCK
Flexible LED aluminium reading lamp Head natural aluminium, white or black, black arm and pedestal, head with infini- tely adjustable light cone 10° - 60°, incl. on/off switch, canopy: Ø 63, D 37mm	SYS 2W	230	153	>90	3000K	max. 300	W	56-185033ng1	244,00	👍
	SYS 2W	230	153	>90	3000K	max. 300	AN	56-185030ng1	244,00	
	SYS 2W	230	153	>90	3000K	max. 300	S	56-185032ng1	247,00	👍

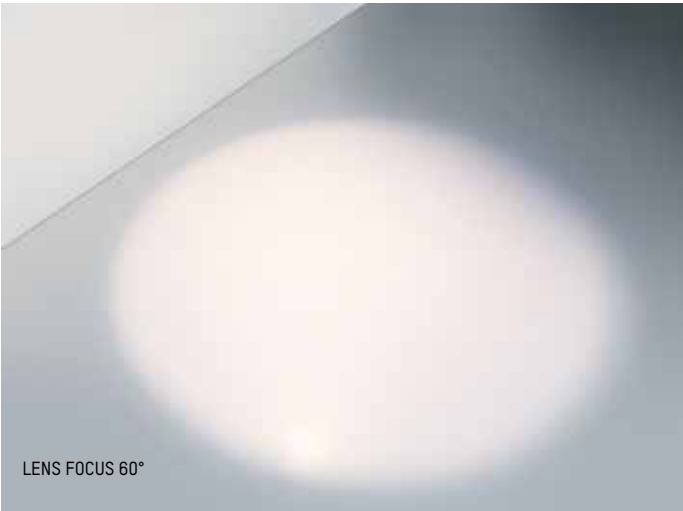

Project: Hotel Eco Suite, Salzburg, Austria
Photo: Molto Luce
Product: ZHOOM LONG SD

MOTUS LONG SD



LED 230V
incl. incl.
IP20
EEL: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	L	COLOUR	REF	CODE	EURO	STOCK
LED aluminium reading lamp, pearl chrome, chrome or black surface, high quality clear glass 30° lens, surface with switch 12° or 30° lenses available upon request	SYS 2W	230	162	>90	3000K	max. 380			56-5331ng2	185,00	
	SYS 2W	230	162	>90	3000K	max. 380			56-53312ng2	185,00	
	SYS 2W	230	162	>90	3000K	max. 380			56-53313ng2	187,00	
Head: Ø 34, L 40 Canopy: Ø 63, H 44											

MOTUS SHORT SD



LED 230V
incl. incl.
IP20
EEL: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	L	COLOUR	REF	CODE	EURO	STOCK
LED aluminium reading lamp, pearl chrome, chrome or black surface, high quality clear glass 30° lens, surface with switch 12° or 30° lenses available upon request	SYS 2W	230	162	>90	3000K	max. 100			56-7300ng2	171,00	
	SYS 2W	230	162	>90	3000K	max. 100			56-7301ng2	171,00	
	SYS 2W	230	162	>90	3000K	max. 100			56-7302ng2	173,00	
Head: Ø 34, L 40 Canopy: Ø 63, H 44											

NIANO



LED 230V
incl. incl.
IP40
EEL: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	Ø	H	Ø	COLOUR	REF	CODE	EURO	STOCK
Wall luminaire with flexible arm, aluminium, powder coated white or black, incl. converter	SYS 2W	230	120	>80	2700K	84	30	max. 500			8-017050	66,00	
	SYS 2W	230	120	>80	3000K	84	30	max. 500			8-019050	66,00	
	SYS 2W	230	120	>80	2700K	84	30	max. 500			8-017060	66,00	
	SYS 2W	230	120	>80	3000K	84	30	max. 500			8-019060	66,00	



Project: Hotel & Designwerkstatt Gusswerk, Salzburg, Austria
Photo: Molto Luce
Product: MOTUS LONG SD

PARI SD



INFO	POWER	V	LUMEN	CRI	LED	L	W	H	COLOUR	CODE	EURO	STOCK
Surface luminaire made of extruded aluminium, anodised surface, white powder coated or chrome, opal PMMA diffuser with 3 sides light output, 3 lengths available, end pieces in profile colour, high colour rendering energy efficient LED Dimmable versions on request	SYS 15W	230	1460	>80	3000K	600	43	81		576-0191	295,00	
	SYS 15W	230	1460	>80	3000K	600	43	81		576-0195	233,00	
	SYS 15W	230	1460	>80	3000K	600	43	81		576-0198	233,00	
	SYS 21W	230	2190	>80	3000K	900	43	81		576-0291	389,00	
	SYS 21W	230	2190	>80	3000K	900	43	81		576-0295	336,00	
	SYS 21W	230	2190	>80	3000K	900	43	81		576-0298	336,00	
	SYS 28W	230	2920	>80	3000K	1200	43	81		576-0391	481,00	
	SYS 28W	230	2920	>80	3000K	1200	43	81		576-0395	378,00	
	SYS 28W	230	2920	>80	3000K	1200	43	81		576-0398	378,00	

MICA SD



INFO	POWER	V	LUMEN	CRI	LED	L	W	H	COLOUR	CODE	EURO	STOCK
Decorative surface luminaire with curved diffuser, polycarbonate satined diffuser, profile base and end-pieces in chrome or silver matt, 2 lengths available Dimmable versions on request	SYS 15W	230	1090	>80	3000K	606	62	52,5		520-0191	264,00	
	SYS 15W	230	1090	>80	3000K	606	62	52,5		520-0194	233,00	
	SYS 21W	230	1640	>80	3000K	904	62	52,5		520-0291	389,00	
	SYS 21W	230	1640	>80	3000K	904	62	52,5		520-0294	355,00	

DENY E




INFO	POWER	V	LUMEN	CRI	LED	L	W	H	COLOUR	CODE	EURO	STOCK
Surface mounted luminaire, die-cast aluminium, matt powder-coated with fine textured paint, square, acrylic opal diffuser, wall or ceiling installation, incl. converter	SYS 15W	230	900	>90	3000K	250	250	65		472-1629150	229,00	



Picture retouch
Photo: Shutterstock
Product: PARI SD

MUSO SQUARE

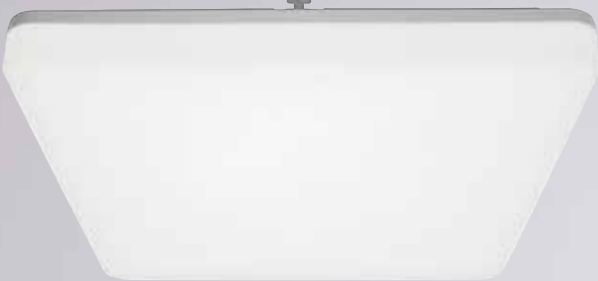

For sizes 280 & 330, the luminaire is mounted on the base plate using a mounting clip. For size 400 the mounting is screwed. There is a gap for side cable entry.

LED 230V, incl. motion detector, incl. driver, IP54, EEL: A++ - A

INFO	POWER	MD	V	LUMEN	CRI	LED	L	W	H	COLOUR	CODE	EURO	STOCK
Square LED surface luminaire in 3 sizes, material polycarbonate white, cover polycarbonate opal matt, opening of luminaire for connection not necessary, simply wall or ceiling mounting , incl. driver MD: incl. motion detector with 8m detection radius, switch-on level <40lx, 90 sec. holding time	SYS 18W	----	230	1750	>80	3000K	280	280	48	wo	501-q2819150	59,00	👍
	SYS 24W	----	230	2270	>80	3000K	330	330	48	wo	501-q3319150	89,00	👍
	SYS 24W	✓	230	2270	>80	3000K	330	330	48	wo	501-q331915h	125,00	👍
	SYS 36W	----	230	3200	>80	3000K	400	400	48	wo	501-q4019150	119,00	👍

Picture retouch
Photo: Shutterstock
Product: MUSO SQUARE

MUSO ROUND



For all sizes, the luminaire is mounted on the base plate using a mounting clip. There is a gap for side cable entry.

LED 230V, incl. motion detector, incl. driver, IP54, EEL: A++ - A

INFO	POWER	MD	EMERGENCY	V	LUMEN	CRI	LED	Ø	H	COLOUR	CODE	EURO	STOCK
ROUND LED surface luminaire in 3 sizes, material polycarbonate white, cover polycarbonate opal matt, opening of luminaire for connection not necessary, simply wall or ceiling mounting , incl. driver MD: incl. motion detector with 8m detection radius, switch-on level <40lx, 90 sec. holding time EMERGENCY LIGHT: 2W, battery life: aprox. 3 h	SYS 18W	----	----	230	1750	>80	3000K	280	48	wo	501-r2819150	59,00	👍
	SYS 18W	----	✓	230	1750	>80	3000K	280	48	wo	501-r281915e	139,00	👍
	SYS 24W	----	----	230	2270	>80	3000K	330	48	wo	501-r3319150	89,00	👍
	SYS 24W	✓	----	230	2270	>80	3000K	330	48	wo	501-r331915h	125,00	👍
	SYS 36W	----	----	230	3200	>80	3000K	400	48	wo	501-r4019150	119,00	👍

Picture retouch
Photo: Shutterstock
Product: MUSO ROUND

CADAN SD

MOLTO LUCE®



LED 230V

INFO	POWER	V	LUMEN PM	LUMEN MP	CRI	LED	L	W	H	CODE	EURO PM	EURO MP	STOCK
Square LED aluminium luminaire, anodised, white or black powder coated finish, opal or microprismatic diffuser Direct beam	SYS 13W	230	1300	1094	>80	3000K	330	330	75	445-073319CXY	301,00	353,00	
	SYS 13W	230	1400	1176	>80	4000K	330	330	75	445-073314CXY	301,00	353,00	
CRI>90 Versions on request	SYS 21W	230	2362	1986	>80	3000K	430	430	75	445-074319CXY	352,00	409,00	
	SYS 21W	230	2540	2136	>80	4000K	430	430	75	445-074314CXY	352,00	409,00	
* 202W Versions available only with opal diffuser	SYS 36W	230	4194	3522	>80	3000K	530	530	75	445-075319CXY	466,00	500,00	
	SYS 36W	230	4510	3788	>80	4000K	530	530	75	445-075314CXY	466,00	500,00	
	SYS 45W	230	5236	4398	>80	3000K	630	630	75	445-076319CXY	537,00	568,00	
	SYS 45W	230	5630	4729	>80	4000K	630	630	75	445-076314CXY	537,00	568,00	
	SYS 116W	230	9784	8870	>80	3000K	900	900	75	445-079019CXY	1200,00	1251,00	
	SYS 116W	230	10520	9530	>80	4000K	900	900	75	445-079014CXY	1200,00	1251,00	
	SYS 202W*	230	17893	----	>80	3000K	1200	1200	75	445-07120191XY	1844,00	----	
	SYS 202W*	230	19240	----	>80	4000K	1200	1200	75	445-07120141XY	1844,00	----	
COMPLETE CODE													
C = COVER					X = COLOUR OF LUMINAIRE					Y = DIMMABLE			
PMMA COVER = 1					white = 5					switchable = without supplement			
MICROPRISMA (UGR<19) = 2					black = 6					analog dimm. 1 - 10V = ad (Price on request)			
					Aluminium anodized = 8					DALI dimm. = ddd (Price on request)			

BADO SD

MOLTO LUCE®



LED 230V

INFO	POWER	V	LUMEN PM	LUMEN MP	CRI	LED	Ø	H	CODE	EURO PM	EURO MP	STOCK
Round LED aluminium luminaire, silver, white or black powder coated finish, opal or microprismatic diffuser	SYS 16W	230	1638	1563	>80	3000K	300	75	445-013019CXY	301,00	342,00	
	SYS 16W	230	1761	1681	>80	4000K	300	75	445-013014CXY	301,00	342,00	
Direct beam CRI>90 Versions on request	SYS 29W	230	3263	3113	>80	3000K	400	75	445-014019CXY	424,00	485,00	
	SYS 29W	230	3509	3347	>80	4000K	400	75	445-014014CXY	424,00	485,00	
	SYS 37W	230	4388	4185	>80	3000K	500	75	445-015019CXY	506,00	589,00	
	SYS 37W	230	4718	4500	>80	4000K	500	75	445-015014CXY	506,00	589,00	
	SYS 44W	230	5366	5106	>80	3000K	600	75	445-016019CXY	682,00	775,00	
	SYS 44W	230	5770	5490	>80	4000K	600	75	445-016014CXY	682,00	775,00	
	SYS 79W	230	7458	6750	>80	3000K	900	75	445-019019CXY	1311,00	1417,00	
	SYS 79W	230	8020	7258	>80	4000K	900	75	445-019014CXY	1311,00	1417,00	
	SYS 158W	230	14954	13533	>80	3000K	1200	75	445-0112019CXY	2210,00	2320,00	
	SYS 158W	230	16080	14552	>80	4000K	1200	75	445-0112014CXY	2210,00	2320,00	
COMPLETE CODE												
C = COVER					X = COLOUR OF LUMINAIRE					Y = DIMMABLE		
PMMA COVER = 1					white = 5					switchable = without supplement		
MICROPRISMA (UGR<19) = 2					black = 6					analog dimm. 1 - 10V = ad (Price on request)		
					silver matt = 8					DALI dimm. = ddd (Price on request)		

CADAN SDI



LED 230V

INFO	POWER	V	LUMEN PM	LUMEN MP	CRI	LED	L	W	H	CODE	EURO PM	EURO MP	STOCK
Square LED aluminium luminaire, anodised, white or black powder coated finish, opal or microprismatic diffuser	SYS 20W	230	2186	2044	>80	3000K	330	330	80	445-083319CXY	372,00	421,00	
	SYS 20W	230	2350	2126	>80	4000K	330	330	80	445-083314CXY	372,00	421,00	
Direct/indirect beam	SYS 35W	230	4029	3841	>80	3000K	430	430	80	445-084319CXY	444,00	489,00	
CRI>90 Versions on request	SYS 35W	230	4400	3990	>80	4000K	430	430	80	445-084314CXY	444,00	489,00	
* 202W Versions available only with opal diffuser	SYS 56W	230	6556	6062	>80	3000K	530	530	80	445-085319CXY	548,00	591,00	
	SYS 56W	230	7050	6328	>80	4000K	530	530	80	445-085314CXY	548,00	591,00	
	SYS 73W	230	8723	8148	>80	3000K	630	630	80	445-086319CXY	602,00	651,00	
	SYS 73W	230	9380	8480	>80	4000K	630	630	80	445-086314CXY	602,00	651,00	
	SYS 158W	230	13494	12573	>80	3000K	900	900	100	445-089019CXY	1300,00	1479,00	
	SYS 158W	230	14510	13520	>80	4000K	900	900	100	445-089014CXY	1300,00	1479,00	
	SYS 262W*	230	22300	----	>80	3000K	1200	1200	100	445-08120191XY	2129,00	----	
	SYS 262W*	230	23980	----	>80	4000K	1200	1200	100	445-08120141XY	2129,00	----	
COMPLETE CODE													
C = COVER					X = COLOUR OF LUMINAIRE					Y = DIMMABLE			
PMMA COVER = 1					white = 5					switchable = without supplement			
MICROPRISMA (UGR<19) = 2					black = 6					analog dimm. 1 - 10V = ad (Price on request)			
					Aluminium anodized = 8					DALI dimm. = ddd (Price on request)			

MOLTO LUCE®



Project: ETM Haag, Austria
Photo: Molto Luce
Product: CADAN SDI

BADO SDI



LED 230V

INFO	POWER	V	LUMEN PM	LUMEN MP	CRI	LED	Ø	H	CODE	EURO PM	EURO MP	STOCK
Round LED aluminium luminaire, silver, white or black powder coated finish, opal or microprismatic diffuser Direct/indirect beam CRI>90 Versions on request	SYS 22W	230	2516	2438	>80	3000K	300	80	445-033019CXY	419,00	461,00	👍
	SYS 22W	230	2705	2622	>80	4000K	300	80	445-033014CXY	419,00	461,00	
	SYS 42W	230	5019	4868	>80	3000K	400	80	445-034019CXY	516,00	579,00	👍
	SYS 42W	230	5397	5234	>80	4000K	400	80	445-034014CXY	516,00	579,00	
	SYS 57W	230	6744	6542	>80	3000K	500	80	445-035019CXY	678,00	761,00	👍
	SYS 57W	230	7252	7034	>80	4000K	500	80	445-035014CXY	678,00	761,00	
	SYS 65W	230	7752	7242	>80	3000K	600	80	445-036019CXY	806,00	899,00	👍
	SYS 65W	230	8335	7787	>80	4000K	600	80	445-036014CXY	806,00	899,00	
	SYS 139W	230	13066	12358	>80	3000K	900	100	445-039019CXY	1496,00	1599,00	
	SYS 139W	230	14050	13288	>80	4000K	900	100	445-039014CXY	1496,00	1599,00	
	SYS 220W	230	20832	19410	>80	3000K	1200	100	445-0312019CXY	2453,00	2577,00	
	SYS 220W	230	22400	20872	>80	4000K	1200	100	445-0312014CXY	2453,00	2577,00	
COMPLETE CODE												
C = COVER					X = COLOUR OF LUMINAIRE					Y = DIMMABLE		
PMMA COVER = 1					white = 5					switchable = without supplement		
MICROPRISMA (UGR<19) = 2					black = 6					analog dimm. 1 - 10V = ad (Price on request)		
					silver matt = 8					DALI dimm. = ddd (Price on request)		







MOLTO LUCE®




Project: JAF Frischeis, Linz, Austria
Photo: Molto Luce
Product: BADO SDI



LED 230V      IP20 EEL: A++ - A

INFO	POWER	V	LUMEN PM	LUMEN MP	CRI	LED	Ø	H	CODE	EURO PM	EURO MP	STOCK
Round LED pendant, aluminium, silver, white or black powder coated finish, opal or microprismatic diffuser, incl. 1500mm suspension und canopy Direct/indirect beam	SYS 42W	230	5020	4870	>80	3000K	400	75	445-044019CXY	516,00	579,00	
	SYS 42W	230	5397	5234	>80	4000K	400	75	445-044014CXY	516,00	579,00	
	SYS 57W	230	6744	6542	>80	3000K	500	75	445-045019CXY	678,00	761,00	
	SYS 57W	230	7252	7034	>80	4000K	500	75	445-045014CXY	678,00	761,00	
	CRI>90 Versions on request											
	SYS 65W	230	7752	7242	>80	3000K	600	75	445-046019CXY	806,00	899,00	
	SYS 65W	230	8335	7787	>80	4000K	600	75	445-046014CXY	806,00	899,00	
	SYS 139W	230	13066	12358	>80	3000K	900	75	445-049019CXY	1496,00	1599,00	
	SYS 139W	230	14050	13288	>80	4000K	900	75	445-049014CXY	1496,00	1599,00	
	SYS 220W	230	20832	19410	>80	3000K	1200	75	445-0412019CXY	2453,00	2577,00	
SYS 220W	230	22400	20872	>80	4000K	1200	75	445-0412014CXY	2453,00	2577,00		
COMPLETE CODE												
C = COVER					X = COLOUR OF LUMINAIRE				Y = DIMMABLE			
 PMMA COVER = 1					 white = 5				switchable = without supplement			
 MICROPRISMA (UGR<19) = 2					 black = 6				analog dimm. 1 - 10V = ad (Price on request)			
					 silver matt = 8				DALI dimm. = ddd (Price on request)			

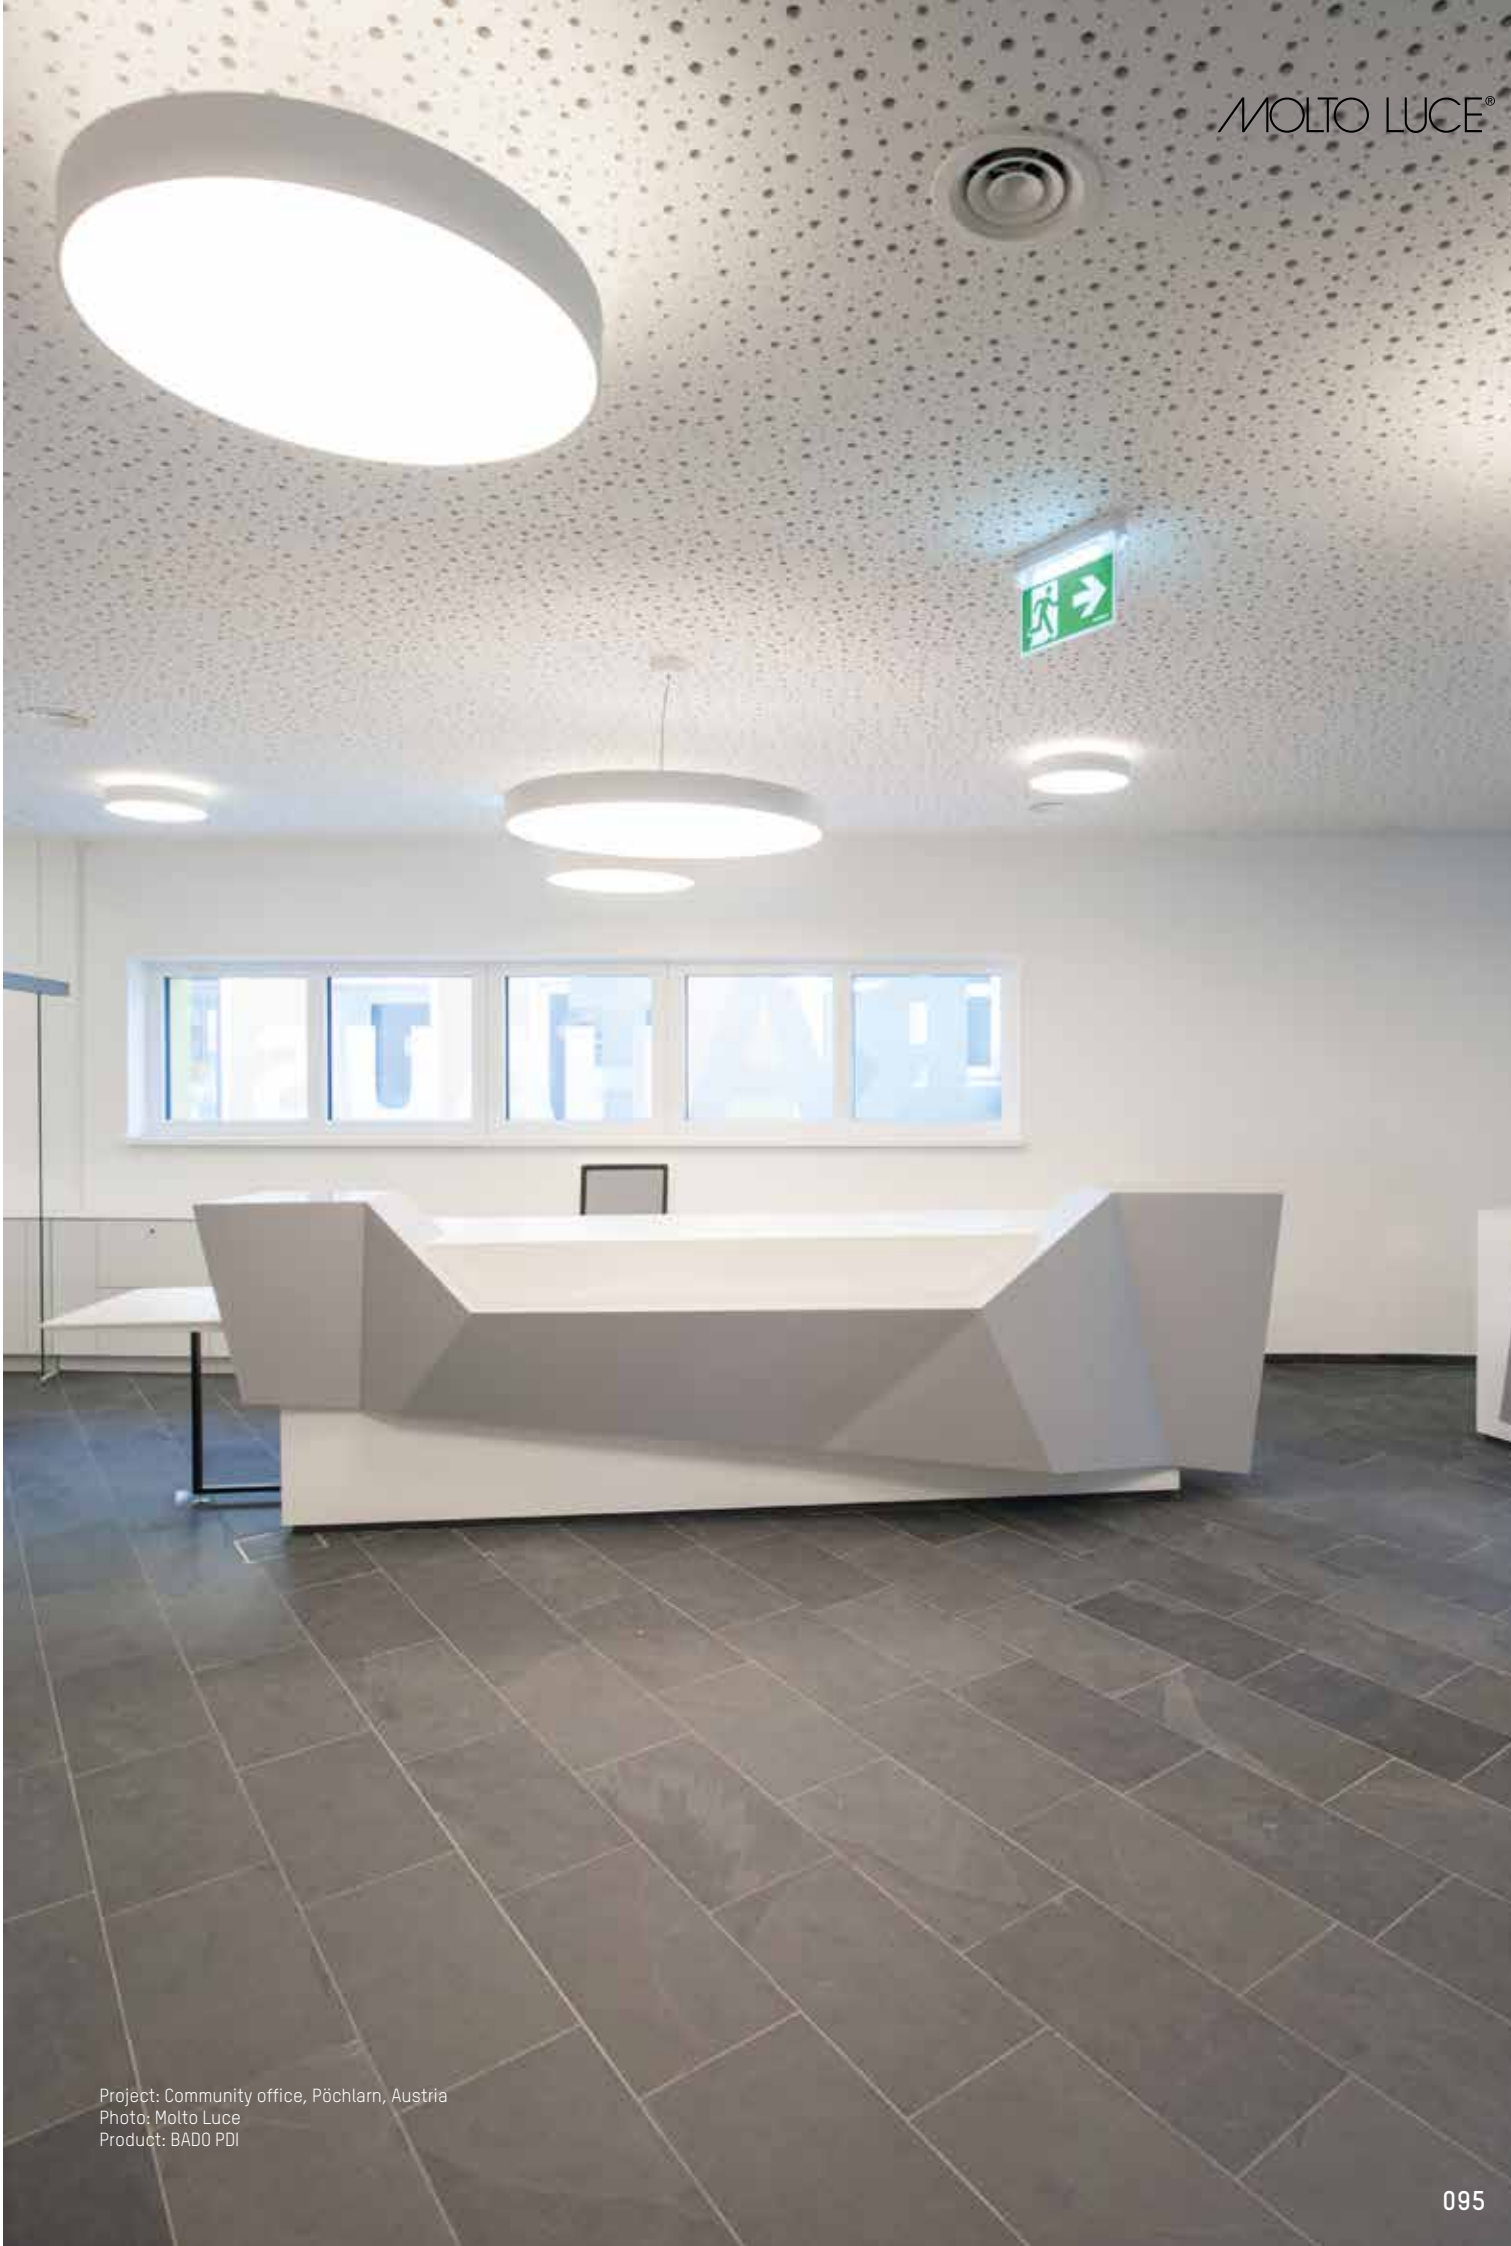

Project: Community office, Pöchlarn, Austria
Photo: Molto Luce
Product: BADO PDI

GILO LED



LED 230V IP20 EEL: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	Ø	H	COLOUR	CODE	EURO	STOCK
Suspended luminaire, die-cast aluminium, matt powder-coated with fine textured paint, acrylic opal diffuser, incl. converter, incl. canopy and 2180mm suspension	SYS 7W	230	339	>90	3000K	80	90	W	472-2429150	149,00	
	SYS 7W	230	339	>90	3000K	80	90	S	472-2429160	149,00	

DARK NIGHT XS PD



LED 230V IP20 EEL: A++ - A


INFO	POWER	V	LUMEN	CRI	LED	Ø	H	REF	CODE	EURO	STOCK
Suspended luminaire, aluminium, powder-coated, round, direct beam, reflector in 4 colours, incl. suspension 1500mm and canopy, energy efficient LEDs with high colour rendering, incl. converter	SYS 22W	230	1380	PREMIUM >90	2700K	60	120		684-006RR0543XXY	159,00	
	SYS 22W	230	1440	PREMIUM >90	3000K	60	120		684-006RR0549XXY	159,00	
	SYS 22W	230	1540	>90	4000K	60	120		684-006RR0524XXY	159,00	
COMPLETE CODE											
LED 3500K on request	RR = COLOUR REFLECTOR				XX = COLOUR OF LUMINAIRE				Y = DIMMBAR		
	REFLECTOR SILVER = 02				white = 55				switchable = 0		
	REFLECTOR BLACK = 03				black = 66				DALI dimm. = d (+ EURO 50)		
	REFLECTOR GOLD = 04										
	REFLECTOR WHITE = 06										

LED 3500K on request




Picture retouch
Photo: Shutterstock
Product: GILO LED

VOLTO COPERTO

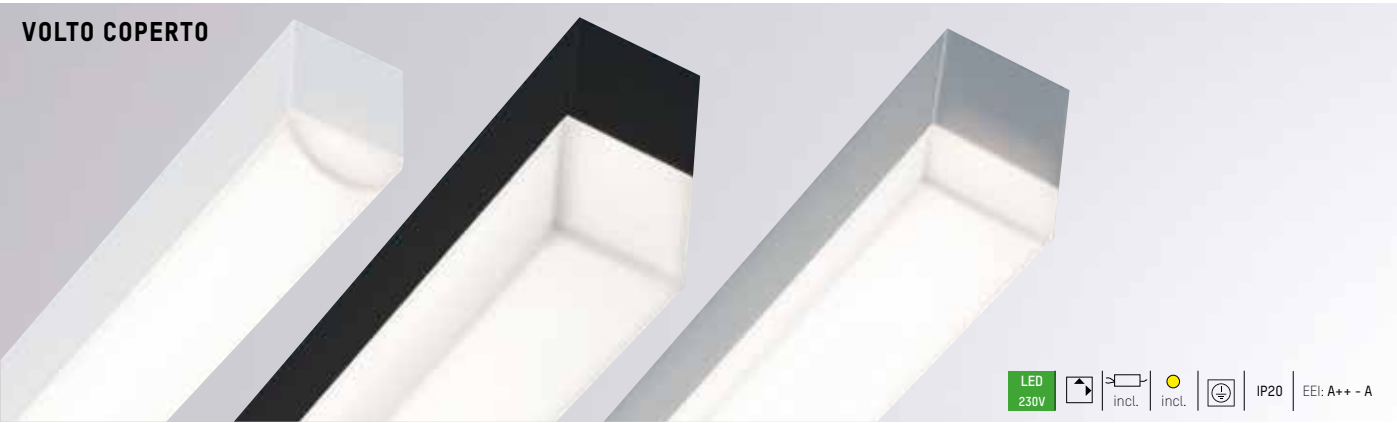





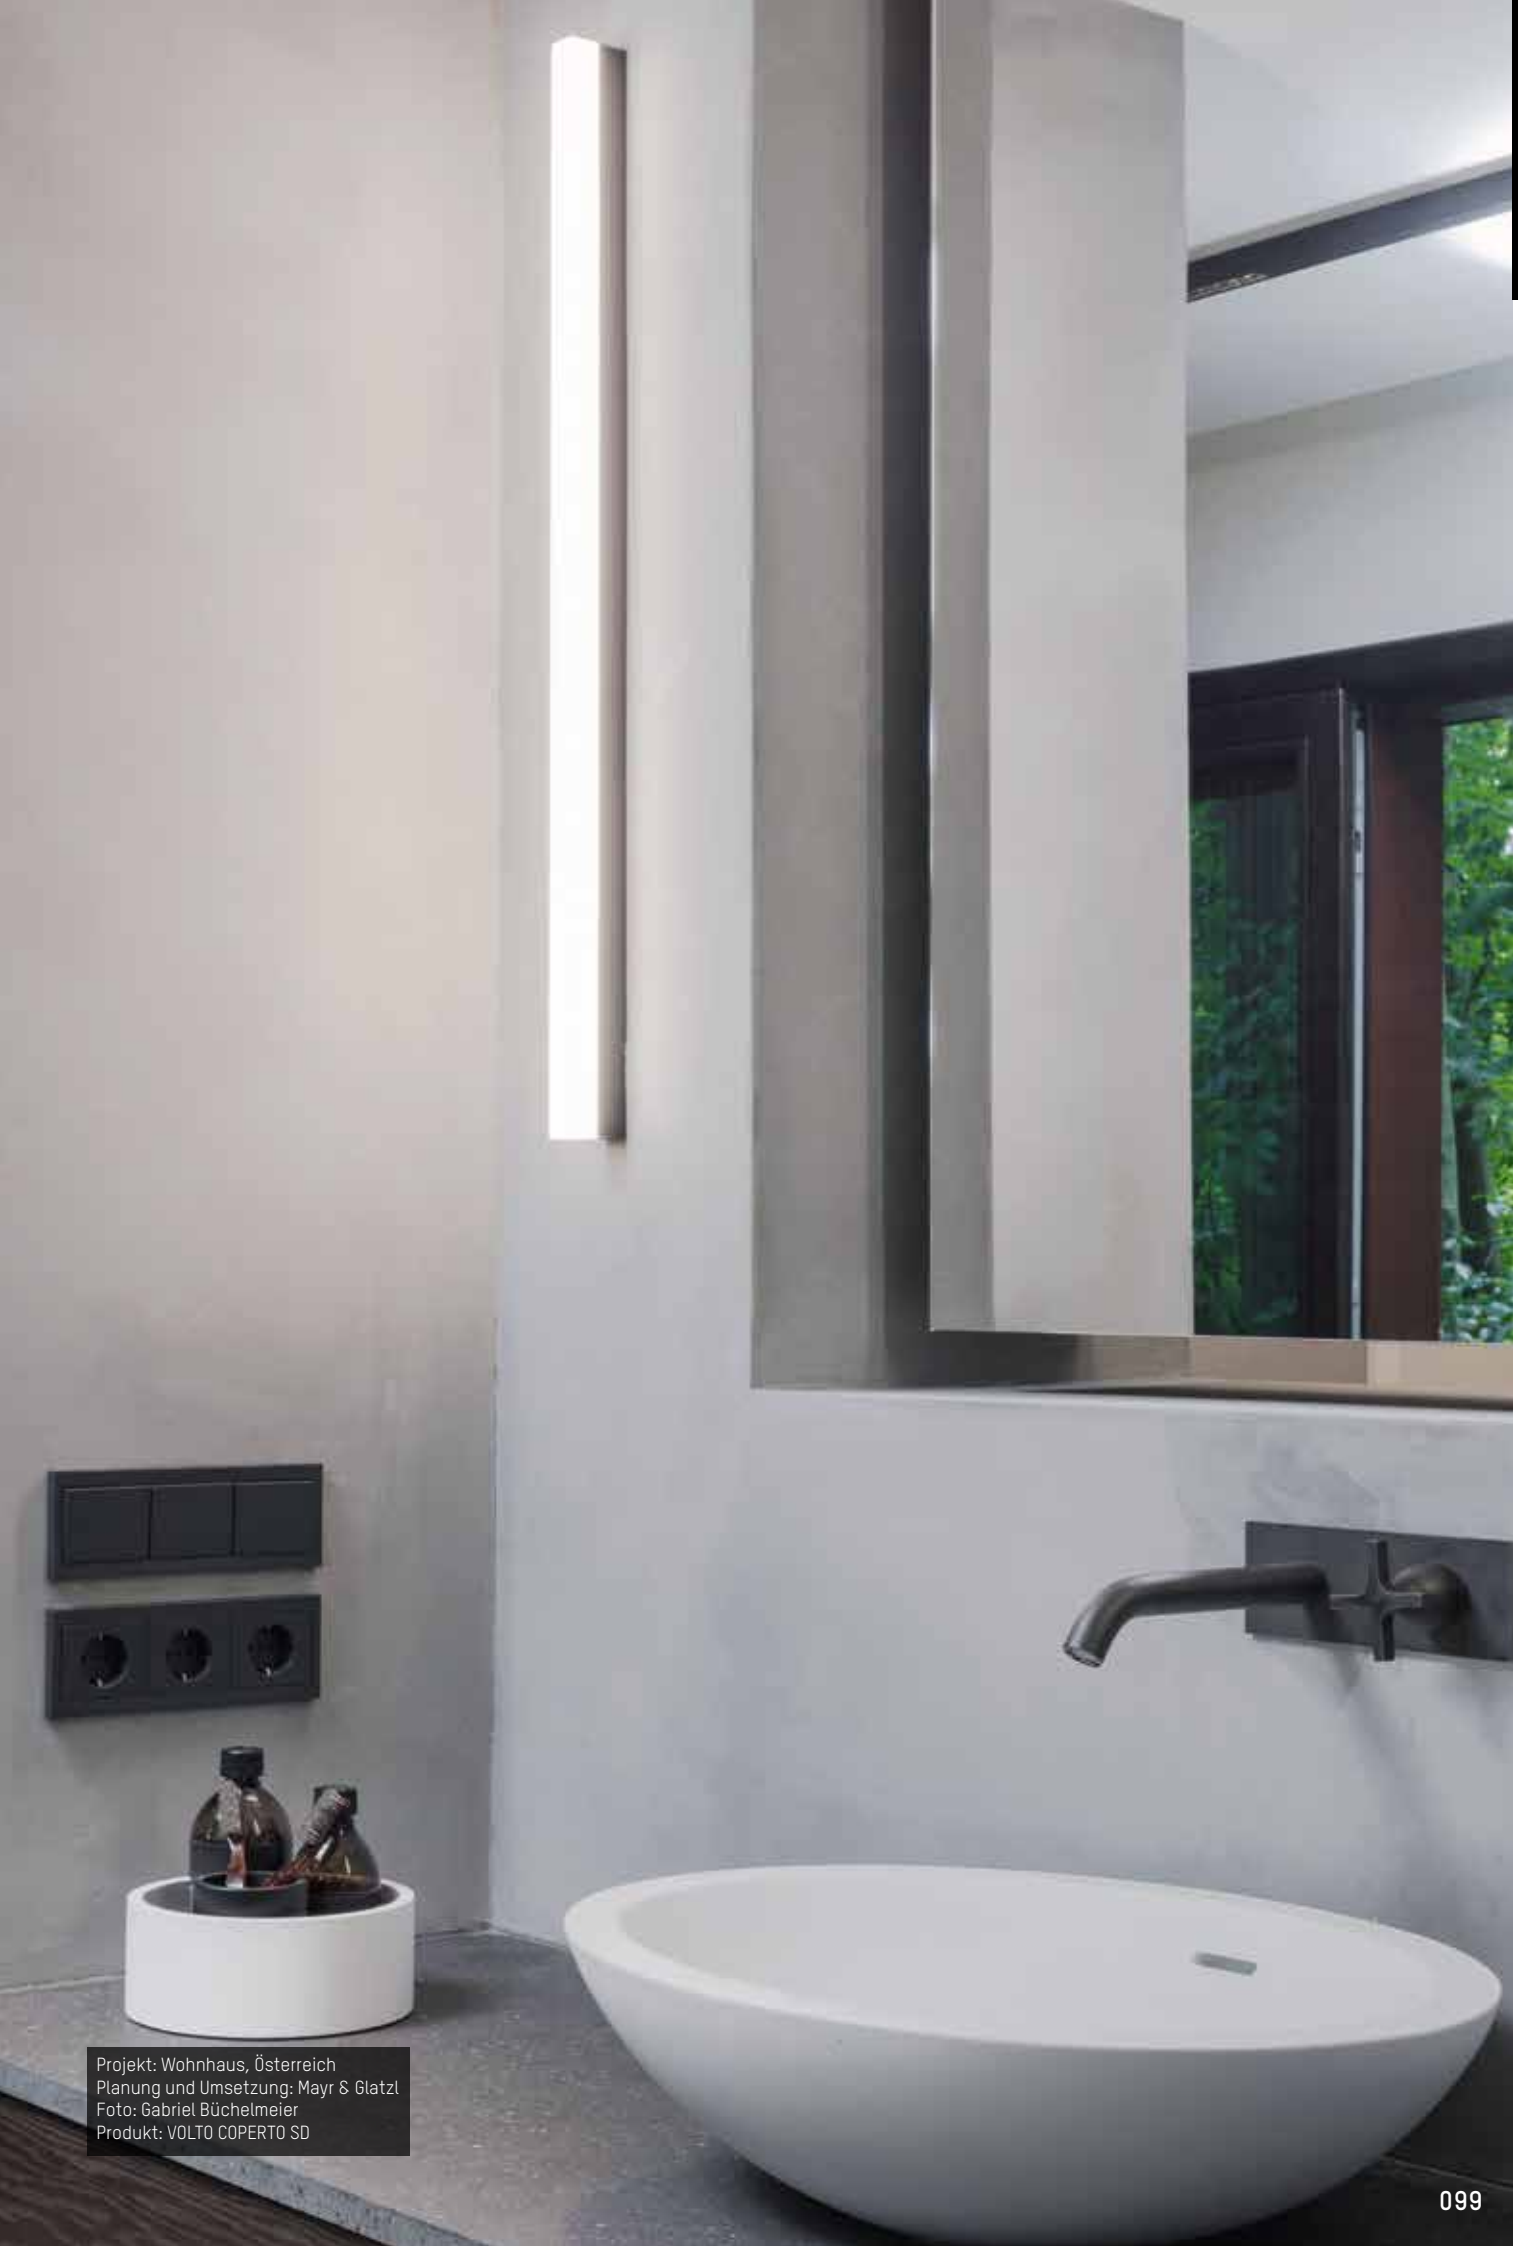

INFO	POWER	V	LUMEN	CRI	LED	L	W	CODE	EURO	STOCK
Slim surface mounted LED luminaire in aluminium, surface anodised or white powder coated, opal PMMA diffuser cubic, flat or round, 4 lengths available, high colour rendering energy efficient LED	SYS 11W	230	680	>90	2700K	570	26	539-01001C0230X0	296,00	
	SYS 11W	230	740	>90	3000K	570	26	539-01001C0290X0	296,00	
	SYS 11W	230	810	>90	4000K	570	26	539-01001C0240X0	296,00	
	SYS 16W	230	1020	>90	2700K	850	26	539-01002C0230X0	346,00	
	SYS 16W	230	1110	>90	3000K	850	26	539-01002C0290X0	346,00	
	SYS 16W	230	1210	>90	4000K	850	26	539-01002C0240X0	346,00	
	SYS 21W	230	1360	>90	2700K	1130	26	539-01003C0230X0	403,00	
	SYS 21W	230	1490	>90	3000K	1130	26	539-01003C0290X0	403,00	
	SYS 21W	230	1620	>90	4000K	1130	26	539-01003C0240X0	403,00	
COMPLETE CODE										
C = COVER								X = COLOUR OF LUMINAIRE		
PMMA COVER FLAT = 1 HEIGHT OF LUMINAIRE: 39mm								white = 5		
PMMA COVER CUBIC = 2 HEIGHT OF LUMINAIRE: 52mm								black = 6		
PMMA COVER ROUND = 3 HEIGHT OF LUMINAIRE: 37mm								Aluminium anodized = 8		





Projekt: Wohnhaus, Österreich
Planung und Umsetzung: Mayr & Glatzl
Foto: Gabriel Büchelmeier
Produkt: VOLTO COPERTO SD

LOG OUT 2 SD




LED 230V   incl.  incl.    IP20 EEL: A++ - A

INFO	POWER 230V		LUMEN MP		LUMEN PM		LED	L	W	H	CODE	EURO MP	EURO PM	STOCK
LIGHT INSERT	HE	HO	HE	HO	HE	HO								
HE = HIGH EFFICIENCY HO = HIGH OUTPUT	SYS 16W	SYS 30W	1390	2580	1490	2760	3000K	853	76	90	628-216L9X..Y	296,00	259,00	
	SYS 16W	SYS 30W	1460	2700	1560	2900	4000K	853	76	90	628-216L4X..Y	296,00	259,00	
Surface LED luminaire made of extruded aluminium, anodised surface, black or white powder coated, opal or microprismatic diffuser, high colour rendering energy efficient LED, switchable, 1-10V or DALI dimmable versions available CRI>80	SYS 20W	SYS 41W	1860	3440	1990	3690	3000K	1134	76	90	628-220L9X..Y	329,00	294,00	
	SYS 20W	SYS 41W	1950	3610	2090	3860	4000K	1134	76	90	628-220L4X..Y	329,00	294,00	
	SYS 25W	SYS 51W	2320	4300	2490	4610	3000K	1415	76	90	628-225L9X..Y	359,00	324,00	
	SYS 25W	SYS 51W	2440	4510	2610	4830	4000K	1415	76	90	628-225L4X..Y	359,00	324,00	
	SYS 40W	SYS 82W	3720	6880	3980	7380	3000K	2259	76	90	628-240L9X..Y	599,00	525,00	
	SYS 40W	SYS 82W	3900	7220	4180	7720	4000K	2259	76	90	628-240L4X..Y	599,00	525,00	
	SYS 50W	SYS 102W	4640	8600	4980	9220	3000K	2821	76	90	628-250L9X..Y	659,00	586,00	
	SYS 50W	SYS 102W	4880	9020	5220	9660	4000K	2821	76	90	628-250L4X..Y	659,00	586,00	
	SYS 60W	SYS 123W	5580	10320	5970	11070	3000K	3383	76	90	628-260L9X..Y	835,00	745,00	
	SYS 60W	SYS 123W	5850	10830	6270	11580	4000K	3383	76	90	628-260L4X..Y	835,00	745,00	
	SYS 75W	SYS 153W	6960	12900	7470	13830	3000K	4226	76	90	628-275L9X..Y	979,00	869,00	
	SYS 75W	SYS 153W	7320	13530	7830	14490	4000K	4226	76	90	628-275L4X..Y	979,00	869,00	
COMPLETE CODE														
L = LIGHT INSERT		X = COLOUR OF LUMINAIRE		.. = COVER		Y = Dimmable								
HIGH EFFICIENCY (HE) = 0		w white = 5		 Microprisma = mp		switchable = without supplement								
HIGH OUTPUT (HO) = 1		s black = 6		 PMMA Opal diffuser = pm		analog dimm. 1 - 10V = ad (Price on request)								
		AE Aluminium anodized = 8				DALI dimm. = ddd (Price on request)								



Project: ETM Haag, Austria
Photo: Molto Luce
Product: LOG OUT 2 SD



INFO	POWER 230V		LUMEN MP		LUMEN PM		LED	L	W	H	CODE	EURO MP	EURO PM	STOCK
LIGHT INSERT	HE	HO	HE	HO	HE	HO								
<div>HE = HIGH EFFICIENCY HO = HIGH OUTPUT</div> <div>Pendant LED luminaire made of extruded aluminium, anodised surface, black or white powder coated, opal or microprismatic diffuser, high colour rendering energy efficient LED, switchable, incl. height adjustable suspension max.3000mm and canopy, incl. converter CRI>80</div> <div>HE Versions with micro-prismatic cover: UGR<19</div>	SYS 20W	SYS 41W	1860	3440	1990	3690	3000K	1134	76	90	628-420L9X..Y	454,00	419,00	
	SYS 20W	SYS 41W	1950	3610	2090	3860	4000K	1134	76	90	628-420L4X..Y	454,00	419,00	
	SYS 25W	SYS 51W	2320	4300	2490	4610	3000K	1415	76	90	628-425L9X..Y	488,00	449,00	
	SYS 25W	SYS 51W	2440	4510	2610	4830	4000K	1415	76	90	628-425L4X..Y	488,00	449,00	
	SYS 40W	SYS 82W	3720	6880	3980	7380	3000K	2259	76	90	628-440L9X..Y	725,00	649,00	
	SYS 40W	SYS 82W	3900	7220	4180	7720	4000K	2259	76	90	628-440L4X..Y	725,00	649,00	
	SYS 50W	SYS 102W	4640	8600	4980	9220	3000K	2821	76	90	628-450L9X..Y	799,00	729,00	
	SYS 50W	SYS 102W	4880	9020	5220	9660	4000K	2821	76	90	628-450L4X..Y	799,00	729,00	
	SYS 60W	SYS 123W	5580	10320	5970	11070	3000K	3383	76	90	628-460L9X..Y	989,00	899,00	
	SYS 60W	SYS 123W	5850	10830	6270	11580	4000K	3383	76	90	628-460L4X..Y	989,00	899,00	
	SYS 75W	SYS 153W	6960	12900	7470	13830	3000K	4226	76	90	628-475L9X..Y	1139,00	1029,00	
	SYS 75W	SYS 153W	7320	13530	7830	14490	4000K	4226	76	90	628-475L4X..Y	1139,00	1029,00	
COMPLETE CODE														
L = LIGHT INSERT	X = COLOUR OF LUMINAIRE		.. = COVER		Y = Dimmable									
HIGH EFFICIENCY (HE) = 0	W white = 5		Microprisma = mp		switchable = without supplement									
HIGH OUTPUT (HO) = 1	S black = 6		PMMA Opal diffuser = pm		analog dimm. 1 - 10V = ad (Price on request)									
	AE Aluminium anodized = 8				DALI dimm. = ddd (Price on request)									



Project: Salming Concept Store, Stockholm, Sweden
Photo: Frieda Hermansson / FH One Design for Cardi
Product: LOG OUT 2 PD






RECESSED WALL



WINDOW I



LED 250mA
excl. incl.
IP20
EEL: A++ - A






INFO	POWER	mA	LUMEN	CRI	LED	W	H	ID	WxH		COLOUR	CODE	EURO	STOCK	
Recessed wall luminaire, aluminium anodised, square, symmetrical, incl. holding spring for cavity wall mounting, excl. converter, recessed box to be ordered separately	LED 3W	250	234	>80	3000K	80	80	38	69x69			305-6801p	33,00		
	CONCRETE HOUSING			INFO					W	H	D	 WxHxD	CODE	EURO	STOCK
				made of galvanised sheet, incl. plastering frame, suitable for WINDOW, not suitable for exposed concrete					142	138	38	140x125x50	305-5058	19,00	

LED CONVERTER WINDOW	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
 Illustration picture	not dimmable, 230 V AC	6	250	12	42	40	22	S	24-122812	17,00	👍
M M S 100V IP20											

WINDOW II



LED 140mA
excl. incl.
IP20
EEL: A++ - A











INFO	POWER	mA	LUMEN	CRI	LED	W	H	ID	WxH		COLOUR	CODE	EURO	STOCK	
Recessed wall luminaire, aluminium anodised, square, asymmetrical, incl. holding spring for cavity wall mounting, excl. converter, recessed box to be ordered separately	LED 3W	250	167	>80	3000K	80	80	38	69x69		 AE	305-6800p	33,00		
	CONCRETE HOUSING			INFO					W	H	D	 WxHxD	CODE	EURO	STOCK
				made of galvanised sheet, incl. plastering frame, suitable for WINDOW, not suitable for exposed concrete					142	138	38	140x125x50	305-5058	19,00	

LED CONVERTER WINDOW	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
 Illustration picture	not dimmable, 230 V AC	6	250	12	42	40	22	S	24-122812	17,00	👍
M M S 100V IP20											

PAN



LED 140mA
excl. incl.
IP20
EEL: A++ - A

INFO	POWER	mA	LUMEN	CRI	LED	W	H	ID	 WxH	COLOUR	CODE	EURO	STOCK			
Recessed wall luminaire, die-cast aluminium, matt powder-coated with fine textured paint, asymmetrical light exit, opal diffuser, excl. converter, recessed box to be ordered separately	LED 3W	250	155	>80	3000K	80	80	36	69x69		305-0130380003005	35,00				
	LED 3W	250	155	>80	3000K	80	80	36	69x69		305-0130380003004	35,00				
	LED 3W	250	155	>80	3000K	80	80	36	69x69		305-0130380003006	35,00				
	CONCRETE HOUSING				INFO					W	H	D	 WxHxD	CODE	EURO	STOCK
					made of galvanised sheet, incl. plastering frame, suitable for PAN, not suitable for exposed concrete					142	138	38	140x125x50	305-5058	19,00	





LED CONVERTER PAN	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
 Illustration picture	not dimmable, 230 V AC	6	250	24	42	40	22	S	24-122812	17,00	👍
M M S 100V IP20											

Project: Private residence, Austria
Photo: Molto Luce
Product: PAN

MOTUS LONG R







INFO	POWER	mA	LUMEN	CRI	LED	L	COLOUR	CODE	EURO	STOCK
LED aluminium reading lamp, pearl chrome, chrome or black surface, high quality clear glass 30° lens, recessed with switch 12° or 30° lenses available upon request	SYS 2W	500	162	>90	3000K	max. 380		56-53011ng2	103,00	
	SYS 2W	500	162	>90	3000K	max. 380		56-53012ng2	103,00	
	SYS 2W	500	162	>90	3000K	max. 380		56-53013ng2	104,00	
Head: Ø 34, L 40 Canopy: Ø 59, H 5 Cutout Ø: 38 ID: 15										

LED CONVERTER MOTUS LONG R	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
 Illustration picture	not dimmable, 230 V AC	4	500	54	51	32	19		75-mpl5	12,00	
   IP20											

ZHOOM LONG R



INFO	POWER	mA	LUMEN	CRI	LED	L	COLOUR	CODE	EURO	STOCK
Flexible LED aluminium reading lamp Head natural aluminium, white or black, black arm and pedestal, head with infinitely adjustable light cone 10° - 60°, incl. on/off switch	SYS 2W	500	153	>90	3000K	max. 300		56-185029ng1	182,00	
	SYS 2W	500	153	>90	3000K	max. 300		56-185026ng1	182,00	
	SYS 2W	500	153	>90	3000K	max. 300		56-185027ng1	184,00	
Head: Ø 20, L 60 Canopy: Ø 59, H 5,5 Cutout Ø: 38 ID: 15										

LED CONVERTER ZHOOM LONG R	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
 Illustration picture	not dimmable, 230 V AC	4	500	54	51	32	19		75-mpl5	12,00	
   IP20											




Project: Private residence, Austria
Photo: Molto Luce
Product: MOTUS LONG R

TRACKS AND SPOTS



2 60 TRACK / 2 60+ TRACK



2 60 TRACK INFO

Die cast aluminium LED Track spotlight microstructure painting in white, black or silver matt, vacuum deposited reflector in 5 beam angles, spotlight 350° swiveling and 180° tilting head, integrated Dali dimmable or switchable LED Driver

19W VERSION NOT DIMMABLE

Attention: Use spotlight only in Nordic XTS 3-phase track

LED 3500K and special light colours on request

POWER	V	LUMEN	CRI	LED	Ø	L	H	CODE	EURO	STOCK
SYS 19W	230	1770	PREMIUM >90	2700K	85	163	202	637-001010R43XX0	185,00	
SYS 19W	230	1840	PREMIUM >90	3000K	85	163	202	637-001010R49XX0	185,00	👍
SYS 19W	230	1960	>90	4000K	85	163	202	637-001010R24XX0	185,00	
SYS 27W	230	2330	PREMIUM >90	2700K	85	163	202	637-001020R43XXY	195,00	
SYS 27W	230	2430	PREMIUM >90	3000K	85	163	202	637-001020R49XXY	195,00	👍
SYS 27W	230	2590	>90	4000K	85	163	202	637-001020R24XXY	195,00	👍

COMPLETE CODE

R = REFLECTOR	XX = COLOUR OF LUMINAIRE	Y = DIMMABLE
17° REFLECTOR 17° = 1	SM silver matt = 04	switchable = 0
24° REFLECTOR 24° = 2	W white = 05	PULSE DALI dimm. = p (+ EURO 60,-)
40° REFLECTOR 40° = 3	S black = 06	
60° REFLECTOR 60° = 4		
AS REFLECTOR ASYMMETRIC = 5		

2 60+ TRACK INFO

Die cast aluminium LED track spotlight, microstructure painting in white, black or silver matt, vacuum deposited reflector in 5 beam angles, integrated Bluetooth LED Driver, controllable with Molto Luce Smart Retail APP

BLUETOOTH DIMMABLE

Attention: Use spotlight only in Nordic XTS 3-phase track

LED 3500K and special light colours on request

THE MOLTO LUCE SMART APP is your system for lighting control, whether individual groups, entire networks, scenes, time schedules, or complex solutions. The Molto Luce Smart Retail APP offers you all possibilities. DOWNLOAD FROM APP OR PLAY STORE

POWER	V	LUMEN	CRI	LED	Ø	L	H	CODE	EURO	STOCK
SYS 27W	230	2330	PREMIUM >90	2700K	85	163	202	637-004020R43XXb	275,00	
SYS 27W	230	2430	PREMIUM >90	3000K	85	163	202	637-004020R49XXb	275,00	
SYS 27W	230	2590	>90	4000K	85	163	202	637-004020R24XXb	275,00	

BLUETOOTH GATEWAY BASIC

INFO

CODE

EURO

STOCK



in addition to the app required for timed operations

701-0001

590,00

COMPLETE CODE


R = REFLECTOR	XX = COLOUR OF LUMINAIRE
17° REFLECTOR 17° = 1	SM silver matt = 04
24° REFLECTOR 24° = 2	W white = 05
40° REFLECTOR 40° = 3	S black = 06
60° REFLECTOR 60° = 4	
AS REFLECTOR ASYMMETRIC = 5	



Project: Intersport Patrick, St. Johann, Austria
Photo: Molto Luce
Product: 2 60 TRACK

SHOPSTAR H TRACK


MOLTO LUCE®









INFO	POWER	V	LUMEN	CRI	LED	Ø	L	H	CODE	EURO	STOCK
Die casting aluminium LED track spot-light, microstructure painting in white, black or silver matt, vacuum deposited reflector in 3 beam angles, spotlight 350° swiveling, head 90° tilting	SYS 27W	230	2500	PREMIUM >90	3000K	95	176	168	608-001030R49XXY	209,00	👍
	SYS 27W	230	2670	>90	4000K	95	176	168	608-001030R24XXY	209,00	
	SYS 36W	230	3050	PREMIUM >90	3000K	95	176	168	608-001040R49XXY	209,00	👍
	SYS 36W	230	3260	>90	4000K	95	176	168	608-001040R24XXY	209,00	👍
Attention: Use spotlight only in Nordic XTS 3-phase track											
LED 2700, 3500K and special light colours on request	COMPLETE CODE										
60° Reflector versions on request	R = REFLECTOR				X = COLOUR OF LUMINAIRE				Y = DIMMABLE		
	REFLECTOR 15° = 2				SM silver matt = 04				switchable = 0		
	REFLECTOR 20° = 5				W white = 05				PULSE DALI dimm. = p (+ EURO 60,-)		
	REFLECTOR 35° = 8				S black = 06						

SHOPSTAR LEAN


MOLTO LUCE®



INFO	POWER	V	LUMEN*	CRI	LED	Ø	L	H	CODE	EURO	STOCK
Die casting aluminium LED track spot-light, microstructure painting in white, black or silver matt, vacuum deposited reflector in 3 beam angles, spotlight 350° swiveling, head 90° tilting	SYS 27W	230	2630	PREMIUM >90	3000K	95	253	180	608-00301CR49XXY	171,00	
	SYS 27W	230	2810	>90	4000K	95	253	180	608-00301CR24XXY	171,00	
	SYS 34W	230	3070	PREMIUM >90	3000K	95	253	180	608-00302CR49XXY	171,00	
	SYS 34W	230	3280	>90	4000K	95	253	180	608-00302CR24XXY	171,00	
Attention: Use spotlight only in Nordic XTS 3-phase track	* Lumen specifications are without protection glass										
LED 2700, 3500K and special light colours on request	COMPLETE CODE										
60° Reflector versions on request	C = COVER				R = REFLECTOR			X = COLOUR		Y = DIMMABLE	
	WITH PROTECTION GLASS = 0 (+ EURO 3,-)					REFLECTOR 15° = 2			silver matt = 04		switchable = 0
	WITHOUT PROTECTION GLASS = 1					REFLECTOR 20° = 5			white = 05		PULSE DALI dimm. = p (+ EURO 45,-)
						REFLECTOR 35° = 8			black = 06		

SHOPSTAR V TRACK

MOLTO LUCE®



INFO	POWER	V	LUMEN	CRI	LED	Ø	L	H	CODE	EURO	STOCK
Die casting aluminium LED track spot-light, microstructure painting in white, black or silver matt, vacuum deposited reflector in 3 beam angles, spotlight 350° swiveling, head 90° tilting	SYS 27W	230	2500	PREMIUM >90	3000K	95	153	176	608-002030R49XXY	209,00	
	SYS 27W	230	2670	>90	4000K	95	153	176	608-002030R24XXY	209,00	
	SYS 36W	230	3050	PREMIUM >90	3000K	95	153	176	608-002040R49XXY	209,00	
	SYS 36W	230	3260	>90	4000K	95	153	176	608-002040R24XXY	209,00	
Attention: Use spotlight only in Nordic XTS 3-phase track											
LED 2700, 3500K and special light colours on request	COMPLETE CODE										
60° Reflector versions on request	R = REFLECTOR				X = COLOUR OF LUMINAIRE				Y = DIMMABLE		
	REFLECTOR 15° = 2				silver matt = 04				switchable = 0		
	REFLECTOR 20° = 5				white = 05				PULSE DALI dimm. = p (+ EURO 60,-)		
	REFLECTOR 35° = 8				black = 06						



Projekt: Schmuck Emmerstorfer, Wels, Austria
Photo: Molto Luce
Product: SHOPSTAR H TRACK

DASH AC TRACK



INFO	POWER	V	LUMEN	CRI	LED	Ø	H	REF	CODE	EURO	STOCK
Mains voltage LED spotlight, die cast aluminium, white, black or silver matt surface, vacuum deposited aluminium reflector, 3 beam angles, spotlight head 350° swiveling and 90° tilting	SYS 11W	230	650	>90	2700K	65	125		599-001010123XX0	160,00	
	SYS 11W	230	690	>90	3000K	65	125		599-001010129XX0	160,00	
	SYS 11W	230	720	>90	4000K	65	125		599-001010124XX0	160,00	
	SYS 11W	230	650	>90	2700K	65	125		599-001010223XX0	160,00	
	SYS 11W	230	690	>90	3000K	65	125		599-001010229XX0	160,00	
	SYS 11W	230	720	>90	4000K	65	125		599-001010224XX0	160,00	
	SYS 11W	230	650	>90	2700K	65	125		599-001010423XX0	160,00	
	SYS 11W	230	690	>90	3000K	65	125		599-001010429XX0	160,00	
	SYS 11W	230	720	>90	4000K	65	125		599-001010424XX0	160,00	

COMPLETE CODE

XX = COLOUR OF LUMINAIRE

silver matt = 04 white = 05 black = 06

DASH L AC TRACK



INFO	POWER	V	LUMEN	CRI	LED	Ø	H	REF	CODE	EURO	STOCK
Mains voltage LED spotlight, die cast aluminium, white, black or silver matt surface, vacuum deposited aluminium reflector, 2 beam angles, spotlight head 350° swiveling and 90° tilting	SYS 11W	230	650	>90	2700K	65	155		599-002010123XX0	171,00	
	SYS 11W	230	690	>90	3000K	65	155		599-002010129XX0	171,00	
	SYS 11W	230	720	>90	4000K	65	155		599-002010124XX0	171,00	
	SYS 11W	230	650	>90	2700K	65	155		599-002010223XX0	171,00	
	SYS 11W	230	690	>90	3000K	65	155		599-002010229XX0	171,00	
	SYS 11W	230	720	>90	4000K	65	155		599-002010224XX0	171,00	
	SYS 11W	230	650	>90	2700K	65	155		599-002010423XX0	171,00	
	SYS 11W	230	690	>90	3000K	65	155		599-002010429XX0	171,00	
	SYS 11W	230	720	>90	4000K	65	155		599-002010424XX0	171,00	

COMPLETE CODE

XX = COLOUR OF LUMINAIRE

silver matt = 04 white = 05 black = 06

DASH L DECOR RING

INFO

inside (order separately)

COLOUR

SM

CODE

599-12

EURO

9,00

STOCK

G

599-13

9,00

W

599-15

9,00



Project: Oceanpark Plus City, Pasching, Austria
Photo: Molto Luce
Product: DASH L AC TRACK

SHOOTER 1 TRACK



230V HV EEI: A++ - D

INFO	BULB	SOCKET	V	W	W	H	COLOUR	CODE	EURO	STOCK
Track spotlight, 1-flame, die-cast aluminium, powder coated or galvanized, spotlight head 285° swiveling and 90° tilting, toolless bulb change	RETROFIT	GU10	230	max. 9	80	130		653-00101000061	110,00	
	RETROFIT	GU10	230	max. 9	80	130		653-00101000055	99,00	
	RETROFIT	GU10	230	max. 9	80	130		653-00101000066	99,00	

SHOOTER 2 TRACK



230V HV EEI: A++ - D

INFO	BULB	SOCKET	V	W	W	H	COLOUR	CODE	EURO	STOCK
Track spotlight, 2-flames, die-cast aluminium, powder coated or galvanized, spotlight head 285° swiveling and 90° tilting, toolless bulb change	2 x RETROFIT	GU10	230	max. 9	140	130		653-00102000061	165,00	
	2 x RETROFIT	GU10	230	max. 9	140	130		653-00102000055	145,00	
	2 x RETROFIT	GU10	230	max. 9	140	130		653-00102000066	145,00	

VISPO HV



230V HV EEI: A++ - D

INFO	BULB	SOCKET	V	W	H	COLOUR	ADAPTER	CODE	EURO	STOCK
Track spotlight, die-cast aluminium, powder coated or galvanized, spotlight head 360° swiveling and 90° tilting, measurements without bulb	RETROFIT	GU10	230	max. 9	95			26-840604	36,00	
	RETROFIT	GU10	230	max. 9	95			26-840646	36,00	
	RETROFIT	GU10	230	max. 9	95			26-840207	36,00	

LITIN AC TRACK



LED 230V incl. EEI: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	Ø	H	REF	CODE	EURO	STOCK
Mains voltage LED track die cast aluminium spotlight, white, black, silver matt or chrome finish, glossy flush mount PMMA diffusers, potlight head 350° swiveling and 90° tilting	SYS 10W	230	600	>80	2700K	90	82		651-001021413XX	153,00	
	SYS 10W	230	600	>80	3000K	90	82		651-001021419XX	153,00	
	SYS 10W	230	600	>80	4000K	90	82		651-001021414XX	153,00	

COMPLETE CODE

XX = COLOUR OF LUMINAIRE

silver matt = 44

white = 55

black = 66

LITIN NO GLARE DIFFUSER



INFO	FARBE	CODE	EURO	STOCK
angular with bayonet cap, aluminium powder coated		651-000024	17,00	
		651-000025	17,00	
		651-000026	17,00	
straight with bayonet cap, aluminium powder coated		651-000014	17,00	
		651-000015	17,00	
		651-000016	17,00	

Project: Private residence, Austria
Photo: Molto Luce
Product: VISPO HV

VARIA TRACK

VARIA 2

VARIA 3

VARIA 2+2



VARIA 2 TRACK	POWER	V	LUMEN	CRI	LED	L	W	H	LIGHT BEAM	CODE	EURO	STOCK
Track luminaire from metall, fine structured paint in white oder black, wide-, narrow- or doube asymmetric beam, luminaire 350° swiveling, Head +/- 15° tilting	SYS 26W	230	3030	>80	3000K	575	65	62	wide beam	703-001020219XXY	169,00	
	SYS 26W	230	3170	>80	4000K	575	65	62	wide beam	703-001020214XXY	169,00	
	SYS 26W	230	3090	>80	3000K	575	65	62	narrow beam	703-001020119XXY	169,00	
	SYS 26W	230	3240	>80	4000K	575	65	62	narrow beam	703-001020114XXY	169,00	
	SYS 26W	230	3200	>80	3000K	575	65	62	double asymm.	703-001020319XXY	169,00	
	SYS 26W	230	3350	>80	4000K	575	65	62	double asymm.	703-001020314XXY	169,00	

VARIA 3 TRACK	POWER	V	LUMEN	CRI	LED	L	W	H	LIGHT BEAM	CODE	EURO	STOCK
Track luminaire from metall, fine structured paint in white oder black, wide-, narrow- or doube asymmetric beam, luminaire 350° swiveling, Head +/- 15° tilting	SYS 38W	230	4550	>80	3000K	863	65	62	wide beam	703-001030219XXY	209,00	
	SYS 38W	230	4750	>80	4000K	863	65	62	wide beam	703-001030214XXY	209,00	
	SYS 38W	230	4600	>80	3000K	863	65	62	narrow beam	703-001030119XXY	209,00	
	SYS 38W	230	4810	>80	4000K	863	65	62	narrow beam	703-001030114XXY	209,00	
	SYS 38W	230	4800	>80	3000K	863	65	62	double asymm.	703-001030319XXY	209,00	
	SYS 38W	230	5030	>80	4000K	863	65	62	double asymm.	703-001030314XXY	209,00	

VARIA 2+2 TRACK	POWER	V	LUMEN	CRI	LED	L	W	H	LIGHT BEAM	CODE	EURO	STOCK
Track luminaire from metall, fine structured paint in white oder black, wide-, narrow- or doube asymmetric beam, luminaire 350° swiveling, Head +/- 15° tilting	SYS 38W	230	4780	>80	3000K	575	131	62	wide beam	703-001010219XXY	279,00	
	SYS 38W	230	5010	>80	4000K	575	131	62	wide beam	703-001010214XXY	279,00	
	SYS 38W	230	4860	>80	3000K	575	131	62	narrow beam	703-001010119XXY	279,00	
	SYS 38W	230	5080	>80	4000K	575	131	62	narrow beam	703-001010114XXY	279,00	
	SYS 38W	230	5070	>80	3000K	575	131	62	double asymm.	703-001010319XXY	279,00	
	SYS 38W	230	5310	>80	4000K	575	131	62	double asymm.	703-001010314XXY	279,00	

COMPLETE CODE

XX = COLOUR OF LUMINAIRE

Y = DIMMABLE

w white = 55

switchable = 0

s black = 66

PULSE DALI dimm. = p (+ EURO 60,-)



3-PHASE TRACK

3-PHASE TRACK SURFACE

INFO	L	W	H	COLOUR	CODE	EURO	STOCK
3-phase rail made of aluminium Grey, white or black painted Surface or suspended mount Conductor Ø 4mm², asymmetrical setting Order accessories separately	1000	31,5	32,5	W	208-19104103	25,00	👍
	1000	31,5	32,5	S	208-19104102	25,00	👍
	1000	31,5	32,5	G	208-19104105	25,00	👍
	2000	31,5	32,5	W	208-19104203	49,50	👍
	2000	31,5	32,5	S	208-19104202	49,50	👍
	2000	31,5	32,5	G	208-19104205	49,50	👍
	3000	31,5	32,5	W	208-19104303	74,00	👍
	3000	31,5	32,5	S	208-19104302	74,00	👍
	3000	31,5	32,5	G	208-19104305	74,00	👍
	4000	31,5	32,5	W	208-19104403	108,00	👍
	4000	31,5	32,5	S	208-19104402	108,00	👍
	4000	31,5	32,5	G	208-19104405	108,00	👍

33-PHASE TRACK RECESSED

INFO	L	W	H	COLOUR	CODE	EURO	STOCK
3-phase rail made of aluminium Grey, white or black painted Recessed mount Conductor Ø 4mm², asymmetrical setting Order accessories separately	1000	56	32,5	W	208-19105103	32,50	👍
	1000	56	32,5	S	208-19105102	32,50	👍
	1000	56	32,5	G	208-19105105	32,50	👍
	2000	56	32,5	W	208-19105203	63,50	👍
	2000	56	32,5	S	208-19105202	63,50	👍
	2000	56	32,5	G	208-19105205	63,50	👍
	3000	56	32,5	W	208-19105303	94,00	👍
	3000	56	32,5	S	208-19105302	94,00	👍
	3000	56	32,5	G	208-19105305	94,00	👍
	1000	56	32,5	W	208-19105103	32,50	👍
	1000	56	32,5	S	208-19105102	32,50	👍
	1000	56	32,5	G	208-19105105	32,50	👍
	2000	56	32,5	W	208-19105203	63,50	👍
	2000	56	32,5	S	208-19105202	63,50	👍
	2000	56	32,5	G	208-19105205	63,50	👍
	3000	56	32,5	W	208-19105303	94,00	👍
	3000	56	32,5	S	208-19105302	94,00	👍
	3000	56	32,5	G	208-19105305	94,00	👍
	1000	56	32,5	W	208-19105103	32,50	👍
	1000	56	32,5	S	208-19105102	32,50	👍
	1000	56	32,5	G	208-19105105	32,50	👍

COVERPLATE

INFO	COLOUR	CODE	EURO	STOCK
for T, L and X-junction, for recessed track only	W	208-19172303	2,80	👍
	S	208-19172302	2,80	👍
	G	208-19172301	2,80	👍
for central and end power feed, for recessed track only	W	208-19172103	2,50	👍
	S	208-19172102	2,50	👍
	G	208-19172101	2,50	👍

END PIECE


INFO	COLOUR	CODE	EURO	STOCK
All track endings have to be equipped with endpieces!	W	208-19170413	0,90	👍
	S	208-19170412	0,90	👍
	G	208-19170411	0,90	👍

POWER FEED


END POWER FEED XTS11

INFO	L	B	H	FARBE	CODE	EURO	STOCK
	66	30	32,5	W	208-19170113	9,50	👍
	66	30	32,5	S	208-19170112	9,50	👍
	66	30	32,5	G	208-19170111	9,50	👍

END POWER FEED XTS12


INFO	L	B	H	FARBE	CODE	EURO	STOCK
	66	30	32,5	W	208-19170123	9,50	👍
	66	30	32,5	S	208-19170122	9,50	👍
	66	30	32,5	G	208-19170121	9,50	👍

CENTER POWER FEED XTS14


INFO	L	B	H	FARBE	CODE	EURO	STOCK
	100	30	32,5	W	208-19170143	19,00	👍
	100	30	32,5	S	208-19170142	19,00	👍
	100	30	32,5	G	208-19170141	19,00	👍

JUNCTION


LINEAR JUNCTION ELECTRIC

INFO	COLOUR	CODE	EURO	STOCK
 Linear junction XTS21 electric, to connect two tracks	W	208-19170213	6,30	👍
	S	208-19170212	6,30	👍
	G	208-19170211	6,30	👍



FLEXIBLE JUNCTION

INFO	L	W	H	COLOUR	CODE	EURO	STOCK
 bendable 0 - 360° Earth left Earth right	175	30	32,5	W	208-19170233	25,00	👍
	175	30	32,5	S	208-19170232	25,00	👍
	175	30	32,5	G	208-19170231	25,00	👍






FLEXIBLE JUNCTION

INFO	L	W	H	COLOUR	CODE	EURO	STOCK
 adjustable 60 - 300° Earth left Earth right	160	30	32,5	W	208-19170243	25,00	👍
	160	30	32,5	S	208-19170242	25,00	👍
	160	30	32,5	G	208-19170241	25,00	👍



L-JUNCTION

INFO	L	W	H	COLOUR	CODE	EURO	STOCK
with optional power feed connection 							
	66	66	32,5	W	208-19170343	20,50	👍
	66	66	32,5	S	208-19170342	20,50	👍
	66	66	32,5	G	208-19170341	20,50	👍

T-JUNCTION


INFO	L	W	H	COLOUR	CODE	EURO	STOCK
with optional power feed connection 							
	100	66	32,5	W	208-19170363	31,50	👍
	100	66	32,5	S	208-19170362	31,50	👍
	100	66	32,5	G	208-19170361	31,50	👍
	100	66	32,5	W	208-19170373	31,50	👍
	100	66	32,5	S	208-19170372	31,50	👍
	100	66	32,5	G	208-19170371	31,50	👍
	100	66	32,5	W	208-19170393	31,50	👍
	100	66	32,5	S	208-19170392	31,50	👍
	100	66	32,5	G	208-19170391	31,50	👍
	100	66	32,5	W	208-19170403	31,50	👍
	100	66	32,5	S	208-19170402	31,50	👍
	100	66	32,5	G	208-19170401	31,50	👍

X-JUNCTION

INFO	L	W	H	COLOUR	CODE	EURO	STOCK
with optional power feed connection 							
	100	100	32,5	W	208-19170383	41,00	👍
	100	100	32,5	S	208-19170382	41,00	👍
	100	100	32,5	G	208-19170381	41,00	👍

3-PHASE TRACK PULSE DALI

3-PHASE TRACK SURFACE

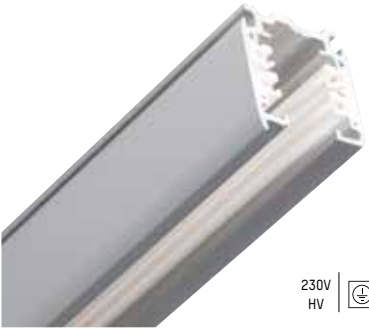

230V
HV



IP20

INFO	L	B	H	COLOUR	CODE	EURO	STOCK
3-phase rail PULSE DALI made of aluminium Grey, white or black painted Surface or suspended mount Conductor Ø 4mm², asymmetrical setting Order accessories separately	1000	31,5	32,5	W	208-19106103	36,00	👍
	1000	31,5	32,5	S	208-19106102	36,00	👍
	1000	31,5	32,5	G	208-19106101	36,00	👍
	2000	31,5	32,5	W	208-19106203	65,00	👍
	2000	31,5	32,5	S	208-19106202	65,00	👍
	2000	31,5	32,5	G	208-19106201	65,00	👍
	3000	31,5	32,5	W	208-19106303	91,00	👍
	3000	31,5	32,5	S	208-19106302	91,00	👍
	3000	31,5	32,5	G	208-19106301	91,00	👍
	4000	31,5	32,5	W	208-19106403	120,00	👍
	4000	31,5	32,5	S	208-19106402	120,00	👍
	4000	31,5	32,5	G	208-19106401	120,00	👍

3-PHASE TRACK RECESSED




230V
HV



IP20

INFO	L	B	H	COLOUR	CODE	EURO	STOCK
3-phase rail PULSE DALI made of aluminium Grey, white or black painted Recessed mount Conductor Ø 4mm², asymmetrical setting Order accessories separately	1000	56	32,5	W	208-19106503	41,00	
	1000	56	32,5	S	208-19106502	41,00	
	1000	56	32,5	G	208-19106501	41,00	
	2000	56	32,5	W	208-19106603	73,00	👍
	2000	56	32,5	S	208-19106602	73,00	👍
	2000	56	32,5	G	208-19106601	73,00	👍
	3000	56	32,5	W	208-19106703	104,00	👍
	3000	56	32,5	S	208-19106702	104,00	👍
	3000	56	32,5	G	208-19106701	104,00	👍

COVERPLATE



INFO	COLOUR	CODE	EURO	STOCK
for T, L and X-junction, for recessed track only	W	208-191f6303	2,80	👍
	S	208-191f6302	2,80	
	G	208-191f6301	2,80	
for central and end power feed, for recessed track only	W	208-191f6103	2,50	👍
	S	208-191f6102	2,50	
	G	208-191f6101	2,50	


END PIECE




INFO	COLOUR	CODE	EURO	STOCK
All track endings have to be equipped with endpieces!	W	208-19170413	0,90	👍
	S	208-19170412	0,90	👍
	G	208-19170411	0,90	👍

POWER FEED PULSE DALI


END POWER FEED XTSC611




INFO	L	W	H	COLOUR	CODE	EURO	STOCK
 Earth right	66	30	32,5	W	208-191c6113	17,00	👍
	66	30	32,5	S	208-191c6112	17,00	👍
	66	30	32,5	G	208-191c6111	17,00	👍


END POWER FEED XTSC612



INFO	L	W	H	COLOUR	CODE	EURO	STOCK
 Earth left	66	30	32,5	W	208-191c6123	17,00	👍
	66	30	32,5	S	208-191c6122	17,00	👍
	66	30	32,5	G	208-191c6121	17,00	👍


CENTER POWER FEED XTSC614



INFO	L	W	H	COLOUR	CODE	EURO	STOCK
 Earth left Earth right	100	30	32,5	W	208-191c6143	39,00	👍
	100	30	32,5	S	208-191c6142	39,00	👍
	100	30	32,5	G	208-191c6141	39,00	👍


JUNCTION PULSE DALI


JUNCTION ELEKTRIC



INFO	COLOUR	CODE	EURO	STOCK
Linear junction XTSD621 elektrisch, electric, to connect two tracks	W	208-191d6213	11,00	👍
	S	208-191d6212	11,00	👍
	G	208-191d6211	11,00	👍


FLEXIBLE JUNCTION





INFO	L	W	H	COLOUR	CODE	EURO	STOCK
bendable 0 - 360°  Earth left Earth right	215	30	32,5	W	208-191c6233	60,00	👍
	215	30	32,5	S	208-191c6232	60,00	👍
	215	30	32,5	G	208-191c6231	60,00	👍

L-JUNCTION


with optional power feed connection







INFO	L	W	H	COLOUR	CODE	EURO	STOCK
 Earth left Earth right	100	100	32,5	W	208-191c6343	39,00	👍
	100	100	32,5	S	208-191c6342	39,00	👍
	100	100	32,5	G	208-191c6341	39,00	👍
 Earth left Earth right	100	100	32,5	W	208-191c6353	39,00	👍
	100	100	32,5	S	208-191c6352	39,00	👍
	100	100	32,5	G	208-191c6351	39,00	

T-JUNCTION


with optional power feed connection

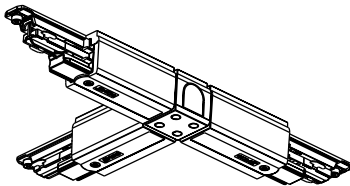


INFO	L	W	H	COLOUR	CODE	EURO	STOCK
 Earth right Earth left Earth left	166	100	32,5	W	208-191c6363	61,00	
	166	100	32,5	S	208-191c6362	61,00	👍
	166	100	32,5	G	208-191c6361	61,00	
 Earth left Earth right Earth right	166	100	32,5	W	208-191c6373	61,00	
	166	100	32,5	S	208-191c6372	61,00	👍
	166	100	32,5	G	208-191c6371	61,00	
 Earth right Earth left Earth right	166	100	32,5	W	208-191c6393	61,00	👍
	166	100	32,5	S	208-191c6392	61,00	👍
	166	100	32,5	G	208-191c6391	61,00	
 Earth left Earth right Earth left	166	100	32,5	W	208-191c6403	61,00	
	166	100	32,5	S	208-191c6402	61,00	👍
	166	100	32,5	G	208-191c6401	61,00	

X-JUNCTION


with optional power feed connection




INFO	L	W	H	COLOUR	CODE	EURO	STOCK
 Earth left Earth left Earth right Earth right	166	166	32,5	W	208-191c6383	83,00	
	166	166	32,5	S	208-191c6382	83,00	👍
	166	166	32,5	G	208-191c6381	83,00	

FIXING COMPONENTS


SURFACE FIXATION

INFO	COLOUR	CODE	EURO	STOCK
	W	208-19180123	3,40	
	S	208-19180122	3,40	
	A	208-19180121	3,40	


SUSPENSION SET

INFO	L	COLOUR	CODE	EURO	STOCK
	1500	W	208-19003	8,40	
	1500	S	208-19002	8,40	
	1500	G	208-19001	8,40	
	3000	W	208-19005	9,50	
	3000	S	208-19006	9,50	
	3000	G	208-19004	9,50	


SURFACE FIXATION

INFO	COLOUR	CODE	EURO	STOCK
	W	208-19180116	4,80	
	S	208-19180115	4,80	
	A	208-19180114	4,80	


INSTALLATION BRACKET

INFO	COLOUR	CODE	EURO	STOCK
	G	775-hv60000808	6,00	


FAST FIXATION SET

INFO	COLOUR	CODE	EURO	STOCK
	G	639-as	6,50	


CABLE SUSPENSION

INFO	CODE	EURO	STOCK
	639-s3000	6,50	

CABLE PER METER



INFO	CODE	EURO	STOCK
	208-19190501	0,80	

SURFACE FIXATION-SET



INFO	COLOUR	CODE	EURO	STOCK
	G	5-plsb	9,00	

ACCESSOIRES

MULTI ADAPTER

INFO	L	W	H	COLOUR	CODE	EURO	STOCK
	85	30	55	W	208-19130681	10,50	
	85	30	55	S	208-19130685	10,50	
	85	30	55	G	208-19130684	10,50	
	85	30	40	W	208-19130698	9,00	
	85	30	40	S	208-19130697	9,00	
	85	30	40	G	208-19130696	9,00	

MULTIA DAPTER PULSE DALI

INFO	L	W	H	COLOUR	CODE	EURO	STOCK
	85	30	55	W	208-19137403	20,00	
	85	30	55	S	208-19137402	20,00	
	85	30	55	G	208-19137401	20,00	
	85	30	40	W	208-19137503	24,00	
	85	30	40	S	208-19137502	24,00	
	85	30	40	G	208-19137501	24,00	

BLIND ADAPTER

INFO	COLOUR	CODE	EURO	STOCK
	W	208-19162173	5,00	

BARREL NIPPLE

INFO	COLOUR	CODE	EURO	STOCK
	AP	208-19130591	1,90	


CORD GRIP

INFO	COLOUR	CODE	EURO	STOCK
	W	208-19825016	1,00	
	S	208-19825019	1,00	

SCHUKO ADAPTER

INFO	COLOUR	CODE	EURO	STOCK
	W	208-19130678	41,50	


TRACK ADAPTER FOR DECORATION HOOK

INFO	COLOUR	CODE	EURO	STOCK
	W	208-19160143	0,80	
	S	208-19160142	0,80	
	A	208-19160141	0,80	


DECORATION HOOK

INFO	COLOUR	CODE	EURO	STOCK
	E	208-19160111	0,25	


RECESSED FRAME

INFO	Ø	ET	DA Ø	COLOUR	CODE	EURO	STOCK
	130	60	105 - 125	W	208-19130713	18,00	
	130	60	105 - 125	S	208-19130712	18,00	
	130	60	105 - 125	G	208-19130711	18,00	

FIX POINT

INFO	Ø	H	COLOUR	CODE	EURO	STOCK
	100	32	W	208-19121703	26,00	
	100	32	S	208-19121702	26,00	
	100	32	G	208-19121701	26,00	


BENDING TOOL

INFO	CODE	EURO	STOCK
	208-19135121	11,50	

OFFICE LUMINAIRES



SYSTEM 01.1 F

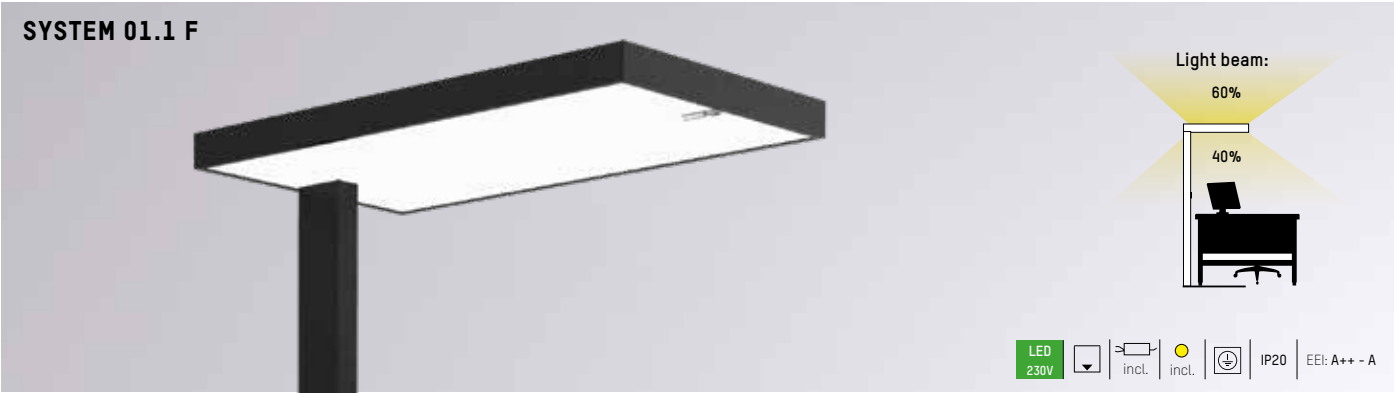

INFO	POWER	V	LUMEN	CRI	LED	VERSION	L	W	H	COLOUR	CODE	EURO	STOCK
LED floor lamp with direct and indirect beam, highly transparent microprismatic diffuser direct and clear cover indirect, versions with separate direct/indirect switch, dimmable switch, motion detector and daylight control or motion detector and daylight control and wireless swarm network-function	SYS 93W	230	13640	>80	3000K	switchable	579	319	2072	AE	697-040013019080	915,00	👍
	SYS 93W	230	13640	>80	3000K	switchable	579	319	2072	W	697-040013019050	915,00	👍
	SYS 93W	230	13640	>80	3000K	switchable	579	319	2072	S	697-040013019060	915,00	👍
	SYS 93W	230	14290	>80	4000K	switchable	579	319	2072	AE	697-040013014080	915,00	👍
	SYS 93W	230	14290	>80	4000K	switchable	579	319	2072	W	697-040013014050	915,00	👍
	SYS 93W	230	14290	>80	4000K	switchable	579	319	2072	S	697-040013014060	915,00	👍
	SYS 93W	230	13640	>80	3000K	dimmable switch	579	319	2072	AE	697-04002301908t	965,00	👍
	SYS 93W	230	13640	>80	3000K	dimmable switch	579	319	2072	W	697-04002301905t	965,00	👍
	SYS 93W	230	13640	>80	3000K	dimmable switch	579	319	2072	S	697-04002301906t	965,00	👍
	SYS 93W	230	14290	>80	4000K	dimmable switch	579	319	2072	AE	697-04002301408t	965,00	👍
	SYS 93W	230	14290	>80	4000K	dimmable switch	579	319	2072	W	697-04002301405t	965,00	👍
	SYS 93W	230	14290	>80	4000K	dimmable switch	579	319	2072	S	697-04002301406t	965,00	👍
	SYS 93W	230	13640	>80	3000K	MD & daylight control	579	319	2072	AE	697-04005301908i	1124,00	👍
	SYS 93W	230	13640	>80	3000K	MD & daylight control	579	319	2072	W	697-04005301905i	1124,00	👍
	SYS 93W	230	13640	>80	3000K	MD & daylight control	579	319	2072	S	697-04005301906i	1124,00	👍
	SYS 93W	230	14290	>80	4000K	MD & daylight control	579	319	2072	AE	697-04005301408i	1124,00	👍
	SYS 93W	230	14290	>80	4000K	MD & daylight control	579	319	2072	W	697-04005301405i	1124,00	👍
	SYS 93W	230	14290	>80	4000K	MD & daylight control	579	319	2072	S	697-04005301406i	1124,00	👍
	SYS 93W	230	13640	>80	3000K	MD & daylight control	579	319	2072	AE	697-04005301908i	1124,00	👍
	SYS 93W	230	13640	>80	3000K	MD & daylight control	579	319	2072	W	697-04005301905i	1124,00	👍
	SYS 93W	230	13640	>80	3000K	MD & daylight control	579	319	2072	S	697-04005301906i	1124,00	👍
	SYS 93W	230	14290	>80	4000K	MD & daylight control	579	319	2072	AE	697-04005301408i	1124,00	👍
	SYS 93W	230	14290	>80	4000K	MD & daylight control	579	319	2072	W	697-04005301405i	1124,00	👍
	SYS 93W	230	14290	>80	4000K	MD & daylight control	579	319	2072	S	697-04005301406i	1124,00	👍

UGR<19


WIRELESS SWITCH FOR SYSTEM 01.1 F	INFO	L	W	H	COLOUR	CODE	EURO	STOCK
	optional wireless switch (order separately) incl. cover	82	82	11	W	646-000040000050	173,00	👍
		82	82	11	S	646-000040000060	173,00	👍

SYSTEM 01 F



INFO	BULB	SOCKET	V	W	VERSION	L	W	H	COLOUR	CODE	EURO	STOCK
Slim aluminium floor lamp, aluminium anodised or white powder coated finish, high-transparent micro-prismatic cover, two-step switch, dimm switch or motion sensor and daylight control	4 x TC-L	2611	230	55	2-step switchable	600	330	1946	AE	570-stl455e	592,00	👍
	4 x TC-L	2611	230	55	2-step switchable	600	330	1946	W	570-stl455ew	592,00	👍
	4 x TC-L	2611	230	55	dimmable switch	600	330	1946	AE	570-stl455d	729,00	👍
	4 x TC-L	2611	230	55	dimmable switch	600	330	1946	W	570-stl455dw	729,00	👍
	4 x TC-L	2611	230	55	MD & daylight control	600	330	1946	AE	570-stl455bwmng1	879,00	👍
	4 x TC-L	2611	230	55	MD & daylight control	600	330	1946	W	570-stl455bwmng1	879,00	👍
	4 x TC-L	2611	230	55	MD & daylight control	600	330	1946	AE	570-stl455bwmng1	879,00	👍
	4 x TC-L	2611	230	55	MD & daylight control	600	330	1946	W	570-stl455bwmng1	879,00	👍

UGR<19

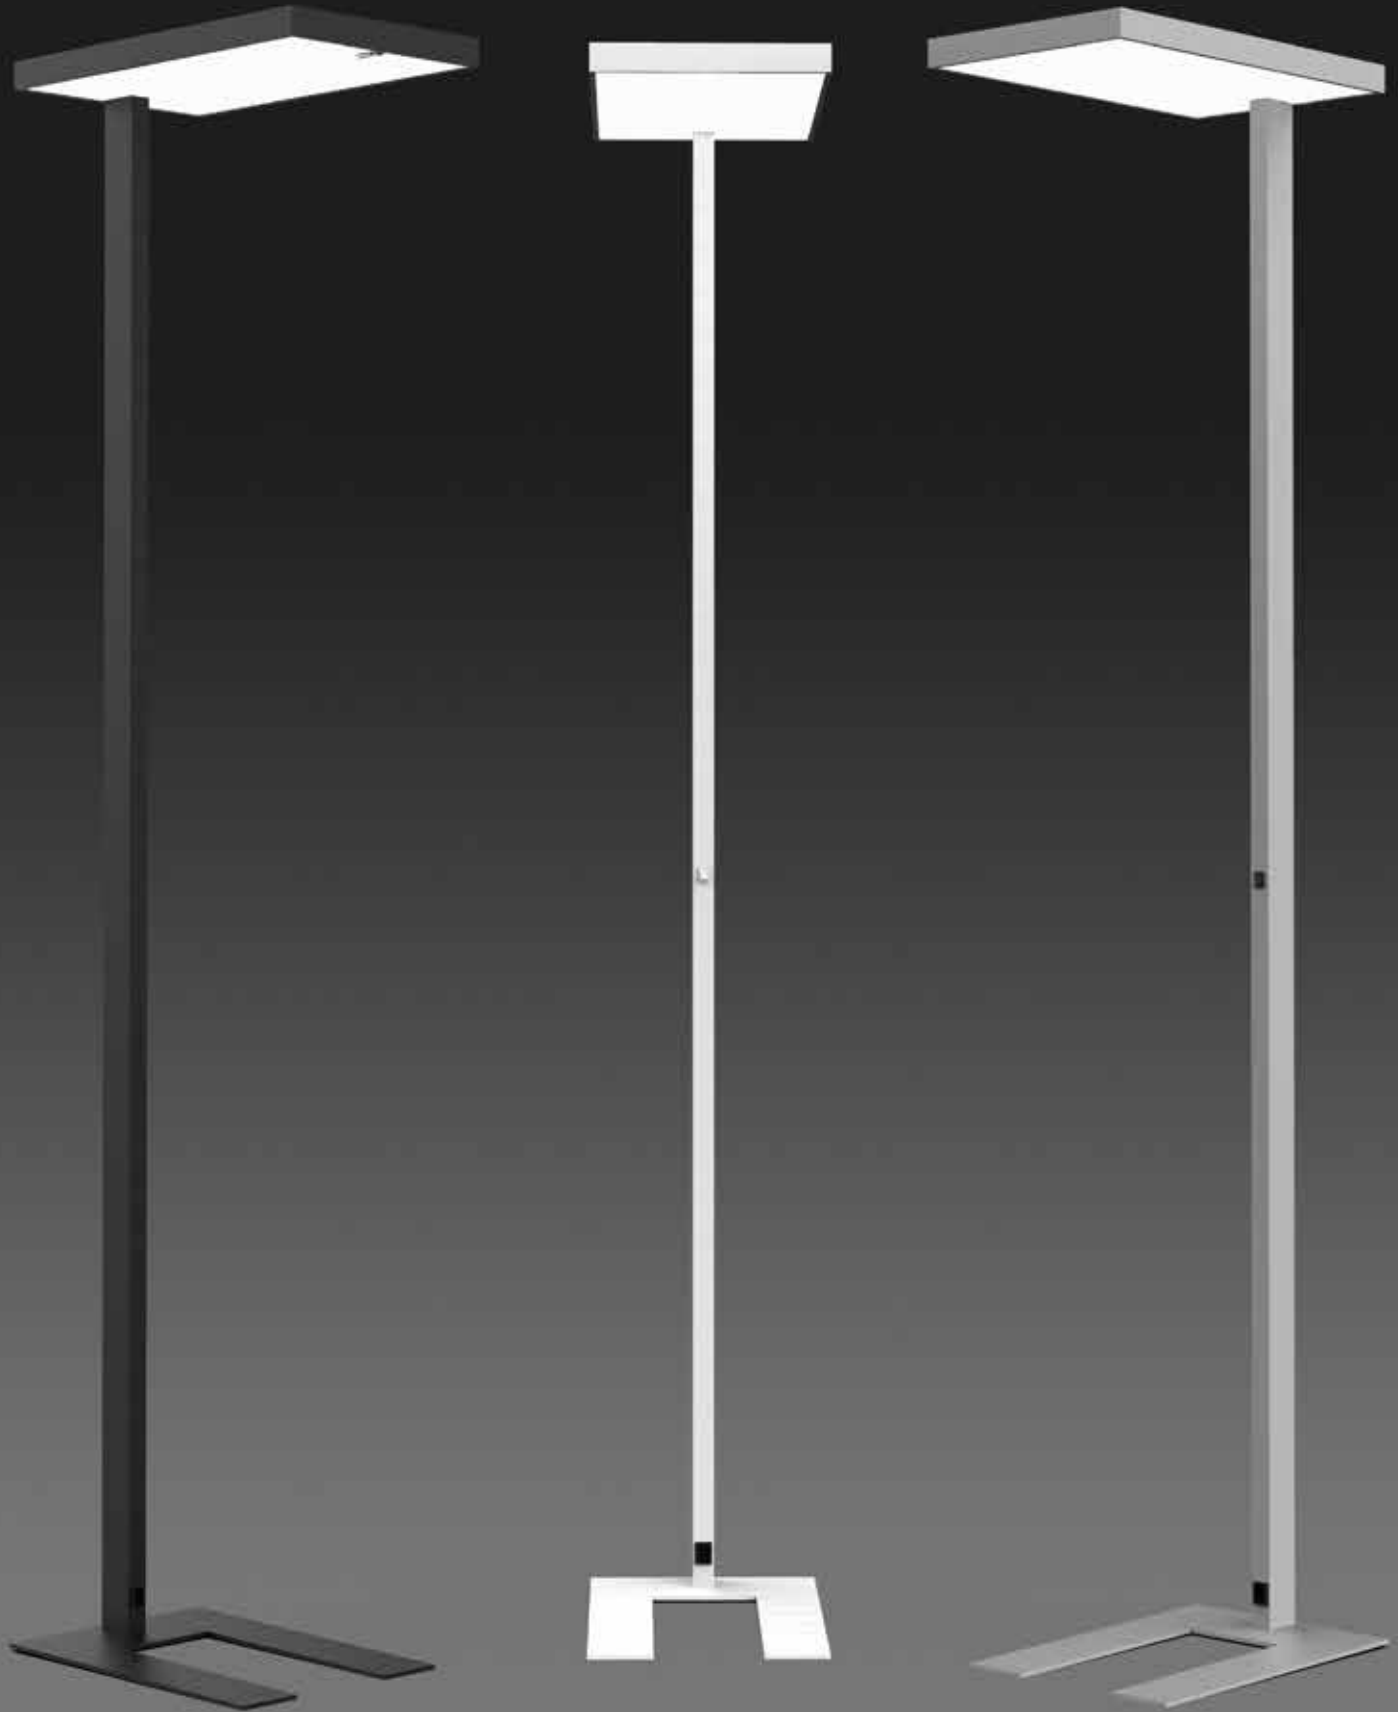


Productrendering
Photo: Molto Luce
Product: SYSTEM 01.1 F

SYSTEM 02.1 F



INFO	POWER	V	LUMEN	CRI	LED	VERSION	L	W	H	COLOUR	CODE	EURO	STOCK
LED floor lamp with direct and indirect beam, highly transparent microprismatic diffuser direct and clear cover indirect, versions with separate direct/indirect switch, dimmable switch, motion detector and daylight control or motion detector and daylight control and wireless swarm network-function	SYS 93W	230	13640	>80	3000K	switchable	579	319	2072	AE	725-040013019080	988,00	👍
	SYS 93W	230	13640	>80	3000K	switchable	579	319	2072	W	725-040013019050	988,00	
	SYS 93W	230	13640	>80	3000K	switchable	579	319	2072	S	725-040013019060	988,00	
	SYS 93W	230	14290	>80	4000K	switchable	579	319	2072	AE	725-040013014080	988,00	👍
	SYS 93W	230	14290	>80	4000K	switchable	579	319	2072	W	725-040013014050	988,00	
	SYS 93W	230	14290	>80	4000K	switchable	579	319	2072	S	725-040013014060	988,00	
	SYS 93W	230	13640	>80	3000K	dimmable switch	579	319	2072	AE	725-04002301908t	1038,00	
	SYS 93W	230	13640	>80	3000K	dimmable switch	579	319	2072	W	725-04002301905t	1038,00	
	SYS 93W	230	13640	>80	3000K	dimmable switch	579	319	2072	S	725-04002301906t	1038,00	
	SYS 93W	230	14290	>80	4000K	dimmable switch	579	319	2072	AE	725-04002301408t	1038,00	
	SYS 93W	230	14290	>80	4000K	dimmable switch	579	319	2072	W	725-04002301405t	1038,00	
	SYS 93W	230	14290	>80	4000K	dimmable switch	579	319	2072	S	725-04002301406t	1038,00	
	SYS 93W	230	13640	>80	3000K	MD & daylight control	579	319	2072	AE	725-04005301908i	1197,00	👍
	SYS 93W	230	13640	>80	3000K	MD & daylight control	579	319	2072	W	725-04005301905i	1197,00	
	SYS 93W	230	13640	>80	3000K	MD & daylight control	579	319	2072	S	725-04005301906i	1197,00	
	SYS 93W	230	14290	>80	4000K	MD & daylight control	579	319	2072	AE	725-04005301408i	1197,00	👍
	SYS 93W	230	14290	>80	4000K	MD & daylight control	579	319	2072	W	725-04005301405i	1197,00	
	SYS 93W	230	14290	>80	4000K	MD & daylight control	579	319	2072	S	725-04005301406i	1197,00	

UGR<19

WIRELESS SWITCH FOR SYSTEM 02.1 F	INFO	L	W	H	COLOUR	CODE	EURO	STOCK
	optional wireless switch (order separately) incl. cover	82	82	11	W	646-000040000050	173,00	👍
		82	82	11	S	646-000040000060	173,00	👍



Picture retouch
Photo: Shutterstock
Product: SYSTEM 02.1 F

SYSTEM 01.1 PDI



LED 230V
incl. incl.
IP20
EEL: A++-A

INFO	POWER	V	LUMEN	CRI	LED	L	W	H	COLOUR	CODE	EURO	STOCK
Slim aluminium pendant, aluminium anodised or white powder coated finish, down light with highly clear microprismatic diffuser, in two lengths available, up and downlight emission UGR<19	SYS 50W	230	7540	>80	3000K	1213	149	37	AE	697-01000301908Y	649,00	
	SYS 50W	230	7540	>80	3000K	1213	149	37	W	697-01000301905Y	649,00	
	SYS 50W	230	7540	>80	3000K	1213	149	37	S	697-01000301906Y	649,00	
	SYS 50W	230	7900	>80	4000K	1213	149	37	AE	697-01000301408Y	649,00	
	SYS 50W	230	7900	>80	4000K	1213	149	37	W	697-01000301405Y	649,00	
	SYS 50W	230	7900	>80	4000K	1213	149	37	S	697-01000301406Y	649,00	
	SYS 63W	230	9430	>80	3000K	1498	149	37	AE	697-02000301908Y	699,00	
	SYS 63W	230	9430	>80	3000K	1498	149	37	W	697-02000301905Y	699,00	
	SYS 63W	230	9430	>80	3000K	1498	149	37	S	697-02000301906Y	699,00	
	SYS 63W	230	9870	>80	4000K	1498	149	37	AE	697-02000301408Y	699,00	
	SYS 63W	230	9870	>80	4000K	1498	149	37	W	697-02000301405Y	699,00	
	SYS 63W	230	9870	>80	4000K	1498	149	37	S	697-02000301406Y	699,00	
COMPLETE CODE												
Y = DIMMABLE												
switchable = 0												
DALI dimm. = d (+ EURO 50)												
swarm motion = i (+EURO 209)												

WIRELESS SWITCH FOR SYSTEM 01.1 PDI	INFO	L	B	H	COLOUR	CODE	EURO	STOCK
	optional wireless switch (order separately) incl. cover	82	82	11	W	646-000040000050	173,00	👍
		82	82	11	S	646-000040000060	173,00	👍


CONNECTOR FOR SYSTEM 01.1 PDI	INFO	CODE	EURO	STOCK
	For mechanical connection of two SYSTEM 01 PDI pendant luminaires	697-00198	8,00	👍



































































Bildretusche
Foto: Molto Luce
Produkt: SYSTEM 01.1 PDI

RUBE PDI



LED 230V   incl.  incl.   IP20 EEL: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	L	W	H	VERSION	COLOUR	CODE	EURO	STOCK
Ultraslim LED pendant from aluminium, surface laquered, cover with microprismatic optik, Very wide indirect light beam, incl. 2500mm suspension and canopy L 500 x W 75 x H 38mm	SYS 36W	230	3785	>80	3000K	1195	295	15	SWITCHABLE		757-lr1203700s	295,00	
	SYS 36W	230	3785	>80	3000K	1195	295	15	DALI DIMM		757-lr1203700dali	360,00	
	SYS 36W	230	4220	>80	4000K	1195	295	15	SWITCHABLE		757-lr1204700s	295,00	
	SYS 36W	230	4220	>80	4000K	1195	295	15	DALI DIMM		757-lr1204700dali	360,00	
	SYS 36W	230	3785	>80	3000K	1195	295	15	SWITCHABLE		757-lr1203700bs	295,00	
	SYS 36W	230	3785	>80	3000K	1195	295	15	DALI DIMM		757-lr1203700bdali	360,00	
	SYS 36W	230	4220	>80	4000K	1195	295	15	SWITCHABLE		757-lr1204700bs	295,00	
	SYS 36W	230	4220	>80	4000K	1195	295	15	DALI DIMM		757-lr1204700bdali	360,00	
	SYS 57W	230	5390	>80	3000K	1195	295	15	SWITCHABLE		757-lr12031050s	295,00	
	SYS 57W	230	5390	>80	3000K	1195	295	15	DALI DIMM		757-lr12031050dali	360,00	
	SYS 57W	230	6085	>80	4000K	1195	295	15	SWITCHABLE		757-lr12041050s	295,00	
	SYS 57W	230	6085	>80	4000K	1195	295	15	DALI DIMM		757-lr12041050dali	360,00	
	SYS 57W	230	5390	>80	3000K	1195	295	15	SWITCHABLE		757-lr12031050bs	295,00	
	SYS 57W	230	5390	>80	3000K	1195	295	15	DALI DIMM		757-lr12031050bdali	360,00	
	SYS 57W	230	6085	>80	4000K	1195	295	15	SWITCHABLE		757-lr12041050bs	295,00	
	SYS 57W	230	6085	>80	4000K	1195	295	15	DALI DIMM		757-lr12041050bdali	360,00	
	SYS 53W	230	4950	>80	3000K	1495	295	15	SWITCHABLE		757-lr15031050s	385,00	
	SYS 53W	230	4950	>80	3000K	1495	295	15	DALI DIMM		757-lr15031050dali	450,00	
	SYS 53W	230	5175	>80	4000K	1495	295	15	SWITCHABLE		757-lr15041050s	485,00	
	SYS 53W	230	5175	>80	4000K	1495	295	15	DALI DIMM		757-lr15041050dali	585,00	
	SYS 53W	230	4950	>80	3000K	1495	295	15	SWITCHABLE		757-lr15031050bs	385,00	
	SYS 53W	230	4950	>80	3000K	1495	295	15	DALI DIMM		757-lr15031050bdali	450,00	
	SYS 53W	230	5175	>80	4000K	1495	295	15	SWITCHABLE		757-lr15041050bs	385,00	
	SYS 53W	230	5175	>80	4000K	1495	295	15	DALI DIMM		757-lr15041050bdali	450,00	
	SYS 70W	230	6815	>80	3000K	1495	295	15	SWITCHABLE		757-lr15031400s	385,00	
	SYS 70W	230	6815	>80	3000K	1495	295	15	DALI DIMM		757-lr15031400dali	450,00	
	SYS 70W	230	7105	>80	4000K	1495	295	15	SWITCHABLE		757-lr15041400s	485,00	
	SYS 70W	230	7105	>80	4000K	1495	295	15	DALI DIMM		757-lr15041400dali	585,00	
	SYS 70W	230	6815	>80	3000K	1495	295	15	SWITCHABLE		757-lr15031400bs	385,00	
	SYS 70W	230	6815	>80	3000K	1495	295	15	DALI DIMM		757-lr15031400bdali	450,00	
	SYS 70W	230	7105	>80	4000K	1495	295	15	SWITCHABLE		757-lr15041400bs	385,00	
	SYS 70W	230	7105	>80	4000K	1495	295	15	DALI DIMM		757-lr15041400bdali	450,00	



Bildretusche
Foto: Shutterstock
Produkt: RUBE PDI



Project: B0B0, Warsaw, Poland
Photo: B0B0

INDUSTRY LUMINAIRES




ONE ROW SYSTEM

ONE ROW MOUNTING RAIL




INFO	FOR W	L	W	H	COLOUR	CODE	EURO	STOCK
Torsion-resistant aluminium profile, aluminium anodised, white or black powder-coated, through-wiring by system inserts, installation of mounting accessories without tools, accessories to be ordered separately WITHOUT THROUGH-WIRING	21/42	1149	70	48	W	639-15	35,00	👍
	21/42	1149	70	48	S	639-16	35,00	
	21/42	1149	70	48	AE	639-18	35,00	👍
	31/62	1712	70	48	W	639-25	45,00	👍
	31/62	1712	70	48	S	639-26	45,00	
	31/62	1712	70	48	AE	639-28	45,00	👍
	41/82	2275	70	48	W	639-35	55,00	👍
	41/82	2275	70	48	S	639-36	55,00	👍
	41/82	2275	70	48	AE	639-38	55,00	👍
	2 x 31/62	3424	70	48	W	639-45	75,00	👍
	2 x 31/62	3424	70	48	S	639-46	75,00	👍
	2 x 31/62	3424	70	48	AE	639-48	75,00	👍
	2 x 41/82	4550	70	48	W	639-55	94,00	👍
	2 x 41/82	4550	70	48	S	639-56	94,00	👍
	2 x 41/82	4550	70	48	AE	639-58	94,00	👍

END PIECE




INFO	COLOUR	CODE	EURO	STOCK
End piece [2 pce.] for ONE ROW mounting rail	W	639-te5	4,50	👍
	S	639-te6	4,50	👍
	SM	639-te4	4,50	👍

END PIECE



INFO	COLOUR	CODE	EURO	STOCK
End piece [2 pce.] for ONE ROW mounting rail order in combination with IP54 cover (look at page 147)	W	639-teip5	35,00	👍
	S	639-teip6	35,00	
	SM	639-teip4	35,00	👍

POWER FEED SET




INFO	CONNECTION	L	COLOUR	CODE	EURO 5-pole	EURO 7-pole	STOCK
incl. connector & earth set	PG 13,5	101	W	639-epg1VV5v1	45,00	47,00	👍
	PG 13,5	101	S	639-epg1VV6v1	45,00	47,00	
	PG 13,5	101	SM	639-epg1VV8v1	45,00	47,00	👍
COMPLETE CODE							
VV = WIRING							
5 pole = 05	PG 16	101	W	639-epg2VV5v1	44,00	47,00	
	PG 16	101	S	639-epg2VV6v1	44,00	47,00	
7 pole = 07	PG 16	101	SM	639-epg2VV8v1	44,00	47,00	

FEED-IN TERMINAL 5 POLE



INFO	CODE	EURO	STOCK
incl. earth set	639-dve05v1	11,00	👍

FEED-IN TERMINAL 7 POLE



INFO	CODE	EURO	STOCK
incl. earth set, for DALI dimmable versions	639-dve07v1	13,50	

ONE ROW LIGHT INSERTS

INFO



System inserts in 3 different lengths, wide beam, narrow beam or double-asymmetric beam, high efficiency or high output, through-wiring 5x, 7x, 5+4x or 7+4x 2,5mm2

7- and 7 + 4- poles are DALI dimmable

COMPLETE CODE


VV = WIRING

5 pole = 05

7 pole = 07

5 + 4 pole = 09

7 + 4 pole = 11



LED 230V
INCL.
IP20
EEL: A++ - A

POWER	V	LUMEN	CRI	LED	LIGHT BEAM	L	CODE	EURO 5 pole	EURO 7 pole	EURO 9 pole	EURO 11 pole	STOCK
LIGHT INSERT WITH HIGH EFFICIENCY												
SYS 21W	230	2880	>80	3000	wide beam	1148	639-11VV98bsv1	199,00	249,00	211,00	261,00	
SYS 21W	230	2980	>80	3000	double asymm.	1148	639-11VV98dav1	199,00	249,00	211,00	261,00	
SYS 21W	230	2940	>80	3000	narrow beam	1148	639-11VV98tsv1	199,00	249,00	211,00	261,00	
SYS 21W	230	2880	>80	4000	wide beam	1148	639-11VV48bsv1	199,00	249,00	211,00	261,00	
SYS 21W	230	2980	>80	4000	double asymm.	1148	639-11VV48dav1	199,00	249,00	211,00	261,00	
SYS 21W	230	2940	>80	4000	narrow beam	1148	639-11VV48tsv1	199,00	249,00	211,00	261,00	
LIGHT INSERT WITH HIGH OUTPUT												
SYS 42W	230	5630	>80	3000	wide beam	1148	639-12VV98bsv1	219,00	269,00	231,00	281,00	
SYS 42W	230	5830	>80	3000	double asymm.	1148	639-12VV98dav1	219,00	269,00	231,00	281,00	
SYS 42W	230	5760	>80	3000	narrow beam	1148	639-12VV98tsv1	219,00	269,00	231,00	281,00	
SYS 42W	230	5630	>80	4000	wide beam	1148	639-12VV48bsv1	219,00	269,00	231,00	281,00	
SYS 42W	230	5830	>80	4000	double asymm.	1148	639-12VV48dav1	219,00	269,00	231,00	281,00	
SYS 42W	230	5760	>80	4000	narrow beam	1148	639-12VV48tsv1	219,00	269,00	231,00	281,00	
LIGHT INSERT WITH HIGH EFFICIENCY												
SYS 31W	230	4310	>80	3000	wide beam	1711	639-21VV98bsv1	249,00	299,00	264,00	314,00	
SYS 31W	230	4460	>80	3000	double asymm.	1711	639-21VV98dav1	249,00	299,00	264,00	314,00	
SYS 31W	230	4410	>80	3000	narrow beam	1711	639-21VV98tsv1	249,00	299,00	264,00	314,00	
SYS 31W	230	4310	>80	4000	wide beam	1711	639-21VV48bsv1	249,00	299,00	264,00	314,00	
SYS 31W	230	4460	>80	4000	double asymm.	1711	639-21VV48dav1	249,00	299,00	264,00	314,00	
SYS 31W	230	4410	>80	4000	narrow beam	1711	639-21VV48tsv1	249,00	299,00	264,00	314,00	
LIGHT INSERT WITH HIGH OUTPUT												
SYS 62W	230	8450	>80	3000	wide beam	1711	639-22VV98bsv1	284,00	334,00	299,00	349,00	
SYS 62W	230	8740	>80	3000	double asymm.	1711	639-22VV98dav1	284,00	334,00	299,00	349,00	
SYS 62W	230	8640	>80	3000	narrow beam	1711	639-22VV98tsv1	284,00	334,00	299,00	349,00	
SYS 62W	230	8450	>80	4000	wide beam	1711	639-22VV48bsv1	284,00	334,00	299,00	349,00	
SYS 62W	230	8740	>80	4000	double asymm.	1711	639-22VV48dav1	284,00	334,00	299,00	349,00	
SYS 62W	230	5640	>80	4000	narrow beam	1711	639-22VV48tsv1	284,00	334,00	299,00	349,00	
LIGHT INSERT WITH HIGH EFFICIENCY												
SYS 41W	230	5750	>80	3000	wide beam	2274	639-31VV98bsv1	299,00	349,00	319,00	369,00	
SYS 41W	230	5950	>80	3000	double asymm.	2274	639-31VV98dav1	299,00	349,00	319,00	369,00	
SYS 41W	230	5880	>80	3000	narrow beam	2274	639-31VV98tsv1	299,00	349,00	319,00	369,00	
SYS 41W	230	5750	>80	4000	wide beam	2274	639-31VV48bsv1	299,00	349,00	319,00	369,00	
SYS 41W	230	5950	>80	4000	double asymm.	2274	639-31VV48dav1	299,00	349,00	319,00	369,00	
SYS 41W	230	5880	>80	4000	narrow beam	2274	639-31VV48tsv1	299,00	349,00	319,00	369,00	
LIGHT INSERT WITH HIGH OUTPUT												
SYS 82W	230	11260	>80	3000	wide beam	2274	639-32VV98bsv1	329,00	379,00	349,00	399,00	
SYS 82W	230	11650	>80	3000	double asymm.	2274	639-32VV98dav1	329,00	379,00	349,00	399,00	
SYS 82W	230	11520	>80	3000	narrow beam	2274	639-32VV98tsv1	329,00	379,00	349,00	399,00	
SYS 82W	230	11260	>80	4000	wide beam	2274	639-32VV48bsv1	329,00	379,00	349,00	399,00	
SYS 82W	230	11650	>80	4000	double asymm.	2274	639-32VV48dav1	329,00	379,00	349,00	399,00	
SYS 82W	230	11520	>80	4000	narrow beam	2274	639-32VV48tsv1	329,00	379,00	349,00	399,00	

5-pole through-wiring

7-pole through-wiring (for DALI dimm.)

5+4-pole through-wiring

7+4-pole through-wiring (for DALI dimm.)

ONE ROW LIGHT INSERTS


ONE ROW 2 GO



LED 230V | 180° | 350° | incl. | incl. | IP20 | EEL: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	Ø	W	H	CODE	EURO 5 pole	EURO 7 pole	EURO 9 pole	EURO 11 pole	STOCK
Die casting aluminium LED spotlight, microstructure painting in white, black or silver matt, vacuum deposited reflector in 4 beam angles, spotlight 350° swiveling, head 180° tilting, not dimmable	SYS 27W	230	2500	PREMIUM >90	3000K	85	281	162,5	639-1VV04R9Xv1	228,00	288,00	238,00	298,00	
	SYS 27W	230	2630	>90	4000K	85	281	162,5	639-1VV02R4Xv1	228,00	288,00	238,00	298,00	
	COMPLETE CODE													
	VV = WIRING				R = REFLECTOR				X = COLOUR OF LUMINAIRE					
	5 pole = 05				17° REFLECTOR 17° = 2				SM silver matt = 4					
LED 2700K & 3500K and special light colours on request	7 pole = 07				24° REFLECTOR 24° = 5				W white = 5					
	5 + 4 pole = 09				40° REFLECTOR 40° = 8				S black = 6					
	7 + 4 pole = 11				AS REFLECTOR ASYMM. = 6									

LIGHT INSERT EMERGENCY EXIT

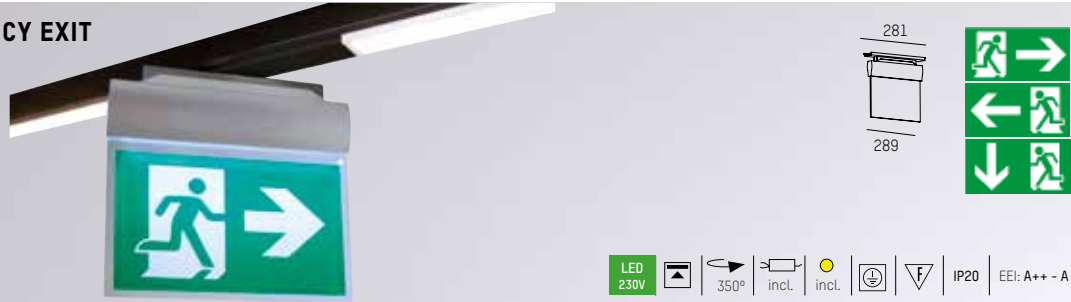

LED 230V | 350° | incl. | incl. | IP20 | EEL: A++ - A

INFO	POWER	V	WIRING	L	W	H	CODE	EURO	STOCK
Emergency escape luminaire, housing made of self-extinguishing synthetic, white, charging time: 12h, detection range 32m, incl. pictogram (1x left, 1x right, 2x downward) Combustion duration: 3h	SYS 1,7W	230	5 + 4 pole	281	34	274	639-rz09Xv1	299,00	
	SYS 1,7W	230	7 + 4 pole	281	34	274	639-rz11Xv1	307,00	
	COMPLETE CODE								
X = COLOUR OF LUMINAIRE									
W white = 5			S black = 6			AE Aluminium anodized = 8			

LIGHT INSERT EMERGENCY LIGHT




LED 230V | incl. | incl. | IP20 | EEL: A++ - A

INFO	POWER	V	WIRING	MOUNTING HEIGHT	L	W	H	COLOUR	CODE	EURO	STOCK
Emergency luminaire system insert, for One-Row, 3 hour battery life, in 5+4-pole or 7+4-pole performance, incl. lens for escape route lighting and anti-panic lighting, distance between luminaires 21m for standard illumination of 1lx (maintained), Combustion duration: 3h	SYS 1,7W	230	5 + 4 pole	max. 3 meter	355	182	73	W	639-nle095v1	429,00	
	SYS 1,7W	230	7 + 4 pole	max. 3 meter	355	182	73	W	639-nle115v1	436,00	
	SYS 1,7W	230	5 + 4 pole	max. 10 meter	355	182	73	W	639-nlh095v1	486,00	
	SYS 1,7W	230	7 + 4 pole	max. 10 meter	355	182	73	W	639-nlh115v1	493,00	

ONE ROW LIGHT INSERTS

LIGHT INSERT SENS CONTROL

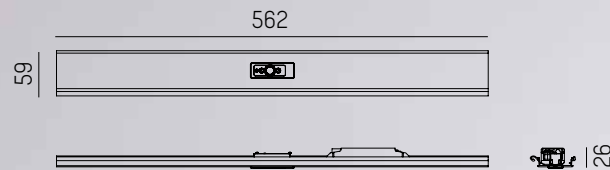

INFO	WIRING	L	W	H	COLOUR	CODE	EURO	STOCK
2 channel light control with DALI interface; Suitable for up to 32 electronic control gears; Daylight-dependent regulation and presence-dependent control of light; Presence detection angle adjustable between 40...90° via integrated shutters ; integrated IR-Receiver; max. Installationheight 5m	7 pole	562	59	29	W	639-sens075v1	239,00	
	7 pole	562	59	29	S	639-sens076v1	239,00	
	7 pole	562	59	29	AE	639-sens078v1	239,00	
	11 pole	562	59	29	W	639-sens115v1	249,00	
	11 pole	562	59	29	S	639-sens116v1	249,00	
	11 pole	562	59	29	AE	639-sens118v1	249,00	

REMOTE MASTER KIT SENS CONTROL	INFO	CODE	EURO	STOCK
	Remote control for configuration and startup of DA-Lleco light control system; Interface for PC connection; incl. USB-Connectioncable and Software	28-195967	168,00	

FIXING COMPONENTS

SURFACE FIXTURE	INFO	COLOUR	CODE	EURO	STOCK
	The delivery does not include screws and dowels	E	639-ad	6,00	👍

STEEL CABLE FIXATION	INFO	COLOUR	CODE	EURO	STOCK
	for steel cable Ø 1,2mm, order steel cable suspension separately	E	639-as	6,50	👍

STEEL CABLE FIXATION HIGH	INFO	COLOUR	CODE	EURO	STOCK
	for steel cable Ø 1,2mm, for mounting 25mm cable tube, order steel cable suspension separately	E	639-ash	12,50	👍

SLANTING STEEL CABLE FIXATION	INFO	COLOUR	CODE	EURO	STOCK
	Y-suspension for steel cable Ø 1,2mm, order steel cable suspension separately	E	639-ay	27,00	👍


STEEL CABLE SUSPENSION	INFO	L	COLOUR	CODE	EURO	STOCK
	Mounting without tools, cut to any length, the delivery does not include screws and dowels, excl. steel cable fixation	3000	E	639-s3000	6,50	👍

CHAIN SUSPENSION	INFO	COLOUR	CODE	EURO	STOCK
	Mounting without tools, the delivery does not include chain	E	639-ak	7,50	👍

JUNCTION


LINEAR JUNCTION MOUNTING RAIL

INFO	COLOUR	CODE	EURO	STOCK
Linear junction for mounting rail, mechanic	E	639-tv	12,00	👍




X-JUNCTION MOUNTING RAIL

INFO	COLOUR	CODE	EURO	STOCK
X-junction for mounting rail, mechanic, order cable connection-set separately	W	639-xtv5	47,00	
	S	639-xtv6	47,00	
	SM	639-xtv4	47,00	




L-JUNCTION MOUNTING RAIL

INFO	COLOUR	CODE	EURO	STOCK
L-junction for mounting rail, mechanic, order cable connection-set separately	W	639-ltv5	36,00	👍
	S	639-ltv6	36,00	
	SM	639-ltv4	36,00	



T-JUNCTION MOUNTING RAIL

INFO	COLOUR	CODE	EURO	STOCK
T-junction for mounting rail, mechanic, order cable connection-set separately	W	639-ttv5	39,00	
	S	639-ttv6	39,00	
	SM	639-ttv4	39,00	




CABLE CONNECTION-SET

INFO	VERDRAHTUNG	CODE	EURO	STOCK
without picture	5-Pole	639-kvs05v1	49,00	
	7-Pole	639-kvs07v1	62,00	

COVERS

COVER METALL


INFO	L	CODE	EURO 5 pole	EURO 7 pole	EURO 9 pole	EURO 11 pole	STOCK
5 - 11 pole through-wiring	1148	639-tam1VVXv1	59,00	69,00	72,00	79,00	
5 - 11 pole through-wiring	1711	639-tam2VVXv1	73,00	83,00	89,00	94,00	
5 - 11 pole through-wiring	2274	639-tam3VVXv1	82,00	92,00	96,00	106,00	
5 - 11 pole through-wiring	281	639-tam4VVXv1	43,00	52,00	53,00	59,00	
without through-wiring	4500	639-tam500X				EURO 56,00	
COMPLETE CODE							
VV = WIRING			X = COLOUR				
5 pole = 05			W	weiß = 5			
7 pole = 07			S	schwarz = 6			
5 + 4 pole = 09			AE	Aluminium eloxiert = 8			
7 + 4 pole = 11							

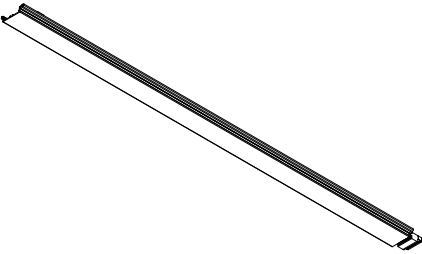

COVERS

COVER CLEAR IP54

INFO	FOR LIGHT INSERT	L	CODE	EURO	STOCK
For IP 54 solutions, toolless mounting, order seal-set and end pieces IP54 separately	21/42W	1148	639-taip1	29,00	
	31/62W	1711	639-taip2	37,00	👍
	41/82W	2273	639-taip3	46,00	
	2 x 31/62W	3420	639-taip4	62,00	
	2 x 41/82W	4545	639-taip5	88,00	👍

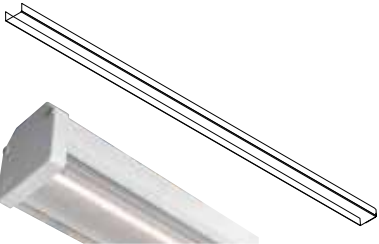


SEAL-SET PROFILE-CUT IP54

INFO	CODE	EURO	STOCK
Consisting of a rubber seal for profile upper side and UV-resistant clear sealing tape, adhesive. Will be glued for profile and transparent cover at IP54 versions	639-tdip	13,00	👍



WALLWASHER


INFO	COLOUR	L	CODE	EURO	STOCK
Add on reflector for asymmetrical light distribution, toolless mounting	W	1148	639-ww15	22,00	
	AE	1148	639-ww18	22,00	
	W	1711	639-ww25	28,00	
	AE	1711	639-ww28	28,00	
	W	2274	639-ww35	34,00	
	AE	2274	639-ww38	34,00	

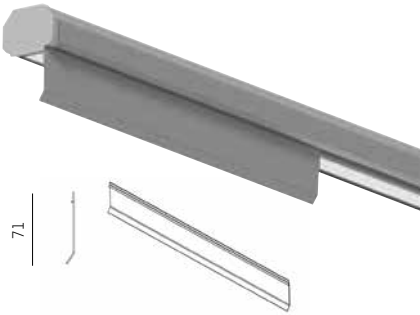

ACCESSOIRES


MOUNTING CLIPS FOR LUMINAIRES

INFO	CODE	EURO	STOCK
with M4 thread	639-bcm	2,50	👍




ADAPTER FOR HIGH BAY LUMINAIRES

INFO	L	CODE	EURO 5 pole	EURO 7 pole	EURO 9 pole	EURO 11 pole	STOCK
Adapter for electrical and mechanical setting of High Bay luminaire Saturno on One Row	281	639-hbVVXv1	81,00	88,00	86,00	93,00	
COMPLETE CODE							
VV = WIRING			X = COLOUR				
5 pole = 05			W	white = 5			
7 pole = 07			S	black = 6			
5 + 4 pole = 09			AE	Aluminium anodized = 8			
7 + 4 pole = 11							

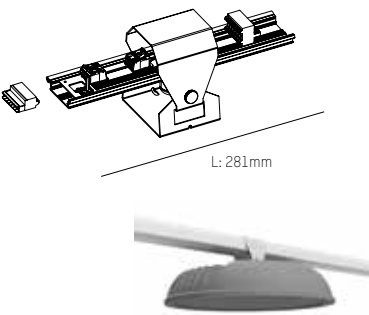

MOUNTING RAIL SYSTEM FOR MOISTURE-PROOF LUMINAIRES

TRAGSCHIENE



INFO
 Mounting rail made of profiled sheet steel, white polyester resin coated, mounting distance max. 2,5m

 WITHOUT THROUGH-WIRING

L	B	H	COLOUR	CODE	EURO	STOCK
4455	69	55	W	910-30049	39,00	

END PIECE



INFO
 Plastic, 2 pce.

COLOUR	CODE	EURO	STOCK
W	910-te	2,00	


COVER



INFO
 Plastic

L	COLOUR	CODE	EURO	STOCK
1485	W	910-tak49	11,00	

LINEAR JUNCTION



INFO
 Linear junction for mounting rail, mechanic

CODE	EURO	STOCK
910-tv	5,00	

CABLE SUSPENSION



INFO
 hHeight-adjustable cable suspenion, Ø 1,5mm2, steel cable and canopy with cable clamp

L	COLOUR	CODE	EURO	STOCK
1000	W	910-as1000	7,30	
3000	W	910-as3000	8,30	
5000	W	910-as5000	10,00	

CHAIN SUSPENSION



INFO
 The delivery does not include chain

CODE	EURO	STOCK
910-ak	5,00	

SURFACE FIXTURE



INFO
 The delivery does not include screws and dowels

CODE	EURO	STOCK
910-ad	3,40	

MOUNTING CLIP FOR LUMINAIRES



INFO
 with M4 thread, max. payload: 3kg

L	W	H	CODE	EURO	STOCK
66	25	12	332-bcm	3,70	

VLO










INFO	POWER	V	LUMEN	CRI	LED	L	W	H	VERSION	COLOUR	CODE	EURO	STOCK
Diffuser luminaire for humid area with trough wiring, made of polycarbonate, opal polycarbonate cover, INOX closure and mounting brackets, P6 screw connection, incl. converter suspended and wall mounted version possible	SYS 19W	230	2500	>80	4000K	1270	86	90	SWITCHABLE	6	757-vlo1912014dv	82,00	
	SYS 19W	230	2500	>80	4000K	1270	86	90	DALI DIMM	6	757-vlo1912014dvd	137,00	
	SYS 38W	230	4900	>80	4000K	1270	136	90	SWITCHABLE	6	757-vlo3812014dv	103,00	
	SYS 38W	230	4900	>80	4000K	1270	136	90	DALI DIMM	6	757-vlo3812014dvd	159,00	
	SYS 50W	230	6600	>80	4000K	1570	136	90	SWITCHABLE	6	757-vlo5815014dv	130,00	
	SYS 50W	230	6600	>80	4000K	1570	136	90	DALI DIMM	6	757-vlo5815014dvd	185,00	
	SYS 75W	230	9000	>80	4000K	1570	136	90	SWITCHABLE	6	757-vlo7515014dv	193,00	
	SYS 75W	230	9000	>80	4000K	1570	136	90	DALI DIMM	6	757-vlo7515014dvd	248,00	

Project: Holter Sanitär, Wels, Österreich
 Photo: Molto Luce
 Product: Tragschiene & VLO

SATURNO



LED 230V IP66 | EEI: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	Ø	H	COLOUR	CODE	EURO	STOCK
Hall luminaire, die-cast aluminium body/ frame with integrated heat sink in the cover area, graphite powder-coated, PMMA optics, diffuser made of clear tempered glass - 4mm thickness, incl. converter suspended by chain or rope possible - to be ordered separately, wide beam	SYS 89W	230	12670	>80	4000K	320	112		125-3307 5400	520,00	
	SYS 100W	230	16317	>80	4000K	400	136		125-3307 5300	670,00	
	SYS 146W	230	20765	>80	4000K	400	136		125-3307 5000	490,00	
	SYS 230W	230	28605	>80	4000K	400	132		125-3307 5200	790,00	
SHADE			INFO					FOR Ø	CODE	EURO	STOCK
			Shade made of polycarbonate, grooved on the inside, UV resistant					320	125-9939 9100	44,00	
								400	125-9939 7900	44,00	

VIALED EVO / VIALED HIGH



LED 230V IP40 | EEI: A++ - A

INFO	POWER	V	LUMEN	MOUNTING HEIGHT	Ø	ID	Ø	COLOUR	CODE	EURO	STOCK
emergency lighting, white self-extinguishing plastic housing, incl. 2 optics (antipanic and escape route lighting), charging time: 12h, incl. converter, operating duration: 3 hours	SYS 5,3W	230	320	max. 3 Meter	85	48	60		282-ve03f30abr	192,00	
	SYS 5,3W	230	320	max. 8 Meter	85	48	60		282-vh03f30abr	229,00	

LYRA EVO



LED 230V IP40 | EEI: A++ - A

INFO	POWER	V	LUMEN	L	W	H	COLOUR	CODE	EURO	STOCK
Escape route lighting, white self-extinguishing plastic housing, charging time: 12h, detection range 32m, incl. pictogram (1x left, 1x right, 2x downward), incl. ceiling/wall fixation (parallel to wall), incl. converter, operating duration: 3 hours	SYS 2W	230	300	289	34	261		282-lv32n30abr	155,00	

TELX



LED 230V IP20 | EEI: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	L	W	H	COLOUR	CODE	EURO	STOCK
LED light bar, steel sheet, with opal PMMA diffuser, incl. LED converter	SYS 14W	230	2100	>80	3000K	605	38	47		757-2116	64,00	
	SYS 14W	230	2100	>80	4000K	605	38	47		757-2117	64,00	
	SYS 27W	230	4100	>80	3000K	1186	38	47		757-2118	76,00	
	SYS 27W	230	4100	>80	4000K	1186	38	47		757-2119	76,00	
	SYS 34W	230	5200	>80	3000K	1484	38	47		757-2120	92,00	
	SYS 34W	230	5200	>80	4000K	1484	38	47		757-2121	92,00	

SOL



LED 230V IP20 | EEI: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	L	W	H	COLOUR	CODE	EURO	STOCK
Surface mounted luminaire (substructure luminaire), anodised aluminium profile, opal diffuser, incl. switch, incl. converter	SYS 11W	230	1250	>80	3000K	600	32	43		757-2112	56,00	
	SYS 11W	230	1250	>80	4000K	600	32	43		757-2113	56,00	
	SYS 20W	230	2200	>80	3000K	1200	32	43		757-2114	68,00	
	SYS 20W	230	2200	>80	4000K	1200	32	43		757-2115	68,00	

KX



LED 230V IP54 | EEI: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	L	W	H	COLOUR	CODE	EURO	STOCK
Surface mounted luminaire, steel sheet, white painted, with opal cover, white plastic end caps, incl. converter	SYS 20W	230	2500	>80	3000K	630	110	60		757-2100	66,00	
	SYS 20W	230	2500	>80	4000K	630	110	60		757-2101	66,00	
	SYS 34W	230	4200	>80	3000K	630	110	60		757-2102	84,00	
	SYS 34W	230	4200	>80	4000K	630	110	60		757-2103	84,00	
	SYS 18W	230	2600	>80	3000K	1210	110	60		757-2104	104,00	
	SYS 18W	230	2600	>80	4000K	1210	110	60		757-2105	104,00	
	SYS 36W	230	5100	>80	3000K	1210	110	60		757-2106	108,00	
	SYS 36W	230	5100	>80	4000K	1210	110	60		757-2107	108,00	
	SYS 47W	230	6900	>80	3000K	1500	110	60		757-2108	156,00	
	SYS 47W	230	6900	>80	4000K	1500	110	60		757-2109	156,00	
	SYS 58W	230	8200	>80	3000K	1500	110	60		757-2110	156,00	
	SYS 58W	230	8200	>80	4000K	1500	110	60		757-2111	156,00	

RECESSED WALL & CEILING OUTDOOR








RECESSED WALL &
CEILING OUTDOOR

RECESSED WALL &
CEILING OUTDOOR

RADO R










LED 500mA IP54 | EEL: A++ - A

INFO	POWER	mA	LUMEN	CRI	LED	Ø	ID	⌀	COLOUR	CODE	EURO	STOCK	
LED recessed spotlight in aluminium, pearl chrome, chrome or black surface, 30° facettet lens, order accessories separately	LED 2W	500	162	>90	3000K	35	29	30		56-6111ng2	67,00		
	LED 2W	500	162	>90	3000K	35	29	30		56-6011ng2	67,00		
	LED 2W	500	162	>90	3000K	35	29	30		56-6211ng2	67,00		
	IN-WALL HOUSING				INFO			L	W	H	ID	CODE	EURO
				for Rado, Ø 30mm, Attention: only LED converter from series 75-MPL fits in the housing			100	100	60	52	56-ak7530	25,00	
CONCRETE MOUNTING SLEEVE				INFO					Ø	L	CODE	EURO	STOCK
				Aluminium, for Rado					35	98	56-be9805	12,50	

MITO R



LED 500mA IP54 | EEL: A++ - A

INFO	POWER	mA	LUMEN	CRI	LED	L	W	ID	Ø	COLOUR	CODE	EURO	STOCK		
LED recessed spotlight in aluminium, pearl chrome, chrome or black surface, 30° faceted lens, order accessories separately	LED 2W	500	162	>90	3000K	35	35	29	30		56-6119ng2	63,00			
	LED 2W	500	162	>90	3000K	35	35	29	30		56-6019ng2	63,00			
	LED 2W	500	162	>90	3000K	35	35	29	30		56-6219ng2	63,00			
	IN-WALL HOUSING				INFO				L	W	H	ID	CODE	EURO	STOCK
					for Mito, Ø 30mm, Attention: only LED converter from series 75-MPL fits in the housing				100	100	60	52	56-ak7530	25,00	
CONCRETE MOUNTING SLEEVE				INFO						Ø	L	CODE	EURO	STOCK	
					Aluminium, for Mito						35	98	56-be9805	12,50	






LED CONVERTER RADO / MITO	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	4	500	54	51	32	18		75-mpl5	12,00	
	not dimmable, 230 V AC	20	500	40	111*	52	22		24-122201	24,00	
	*not suitable for mounting in housing										

IP20

COMA R



LED 500mA IP54 | EEL: A++ - A

INFO	POWER	mA	LUMEN	CRI	LED	Ø	ID	Ø	COLOUR	CODE	EURO	STOCK		
Round LED aluminium half-recessed spotlight, pearl chrome, chrome or black surface, 120° beam angle, order accessories separately	LED 2W	500	49	>90	3000K	50	21	36		56-60061ang2	77,00			
	LED 2W	500	49	>90	3000K	50	21	36		56-60062ang2	77,00			
	LED 2W	500	49	>90	3000K	50	21	36		56-60063ang2	77,00			
IN-WALL HOUSING					INFO			L	W	H	ET	CODE	EURO	STOCK
					for Rado, Ø 36mm, Attention: only LED converter from series 75-MPL fits in the housing			100	100	60	52	56-ak7536	25,00	
CONCRETE MOUNTING SLEEVE					INFO			Ø	L	CODE		EURO	STOCK	
					Aluminium, for Coma			40	98	56-be9804		12,50		
MOUNTING RING					INFO			Ø	CODE		EURO	STOCK		
					Mounting ring for Coma, 2 parts for housing with Ø 68 mm, Attention: excl. housing			80	56-bl6836		25,50			

LED KONVERTER COMA	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	4	500	54	51	32	18		75-mpl5	12,00	
	not dimmable, 230 V AC	20	500	40	111*	52	22		24-122201	24,00	
	*not suitable for mounting in housing										


IP20


MOLTO LUCE®

Project: Private residence, Austria
Photo: Molto Luce
Product: COMA R




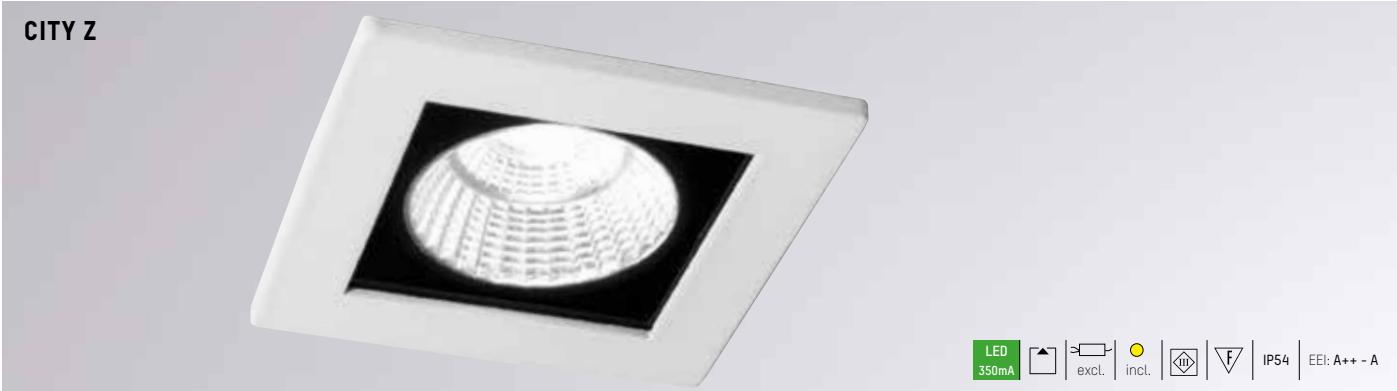
INFO	POWER	mA	LUMEN	CRI	LED	L	W	ID	∅	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, matt powder-coated with fine textured paint, square, round ceiling cutout, fixed, with recessed light source, available in 2 beam angles, excl. converter	LED 7W	200	700	>90	3000K	72	72	93	60	<div>W</div>	<div>120°</div>	472-0270790203005	42,00	<div></div>
	LED 7W	200	660	>90	3000K	72	72	93	60	<div>S</div>	<div>120°</div>	472-0270790203006	42,00	<div></div>
	LED 7W	200	640	>90	3000K	72	72	93	60	<div>W</div>	<div>140°</div>	472-0270790403005	42,00	<div></div>
	LED 7W	200	630	>90	3000K	72	72	93	60	<div>S</div>	<div>140°</div>	472-0270790403006	42,00	<div></div>

LED CONVERTER IVY SQUARE	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	8,5	200	44	147	44	22	<div>W</div>	24-127570	15,00	<div></div>
	dimmable, DALI dimm.	9,5	180	53	111	52	22	<div>W</div>	24-123395	40,00	<div></div>

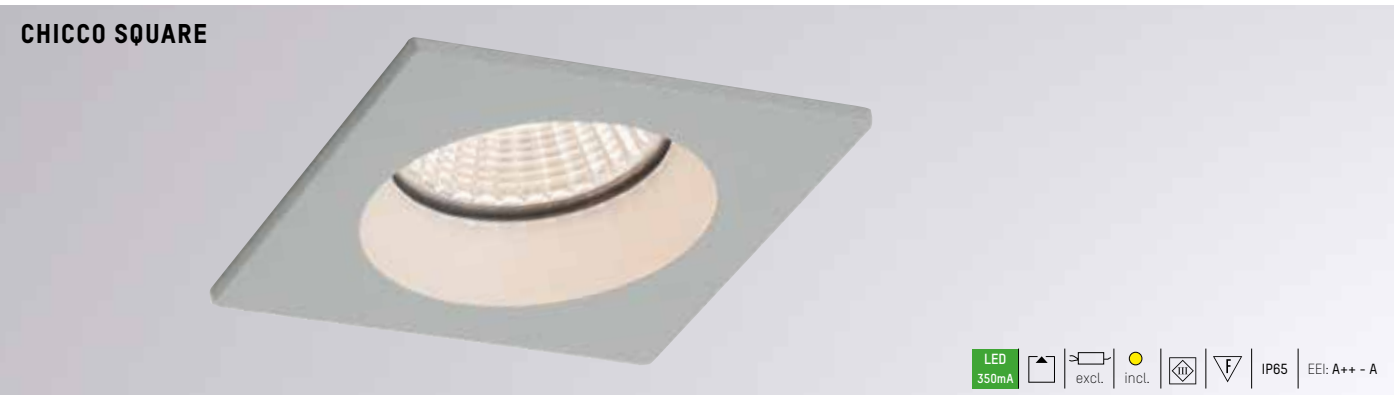


INFO	POWER	mA	LUMEN	CRI	LED	L	W	ID	∅	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, matt powder-coated with fine textured paint, fixed, recessed light source, 30° beam angle, excl. converter	LED 7W	350	530	>90	2700K	90	90	80	78	<div>S</div>	<div>30°</div>	308-0020790302704	43,00	<div></div>
	LED 7W	350	540	>90	2700K	90	90	80	78	<div>W</div>	<div>30°</div>	308-0020790302705	43,00	<div></div>
	LED 7W	350	510	>90	2700K	90	90	80	78	<div>S</div>	<div>30°</div>	308-0020790302706	43,00	<div></div>
	LED 7W	350	560	>90	3000K	90	90	80	78	<div>S</div>	<div>30°</div>	308-0020790303004	43,00	<div></div>
	LED 7W	350	590	>90	3000K	90	90	80	78	<div>W</div>	<div>30°</div>	308-0020790303005	43,00	<div></div>
	LED 7W	350	560	>90	3000K	90	90	80	78	<div>S</div>	<div>30°</div>	308-0020790303006	43,00	<div></div>

LED CONVERTER CHICCO	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	16	350	46	147	44	30	<div>W</div>	24-127530n	15,00	<div></div>
	dimmable, DALI dimm.	17	350	49	111	52	22	<div>W</div>	24-151403	40,00	<div></div>



INFO	POWER	mA	LUMEN	CRI	LED	L	W	ID	LxW	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight in aluminium, matt powder-coated with fine textured paint, square, fixed, incl. clear protection glass, 35° beam angle, excl. converter	LED 12W	350	1100	>80	3000K	87	87	106	72x72	<div>W</div>	<div>35°</div>	308-101512337ng1	119,00	<div></div>
	LED 12W	350	1100	>80	3000K	87	87	106	72x72	<div>S</div>	<div>35°</div>	308-101612337ng1	119,00	<div></div>

LED CONVERTER CITY Z	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	16	350	46	147	44	30	<div>W</div>	24-127530n	15,00	<div></div>
	dimmable, DALI dimm.	17	350	49	111	52	22	<div>W</div>	24-151403	40,00	<div></div>



IVY ROUND



LED 200mA
excl. incl.
IP54
EEL: A++ - A

INFO	POWER	mA	LUMEN	CRI	LED	Ø	ID	⌀	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, matt powder-coated with fine textured paint, round, round ceiling cutout, fixed, with recessed light source, available in 2 beam angles, excl. converter	LED 7W	200	700	>90	3000K	72	93	60	W	120°	472-0260790203005	39,00	👍
	LED 7W	200	535	>90	3000K	72	93	60	S	120°	472-0260790203006	39,00	👍
	LED 7W	200	670	>90	3000K	72	93	60	W	140°	472-0260790403005	39,00	👍
	LED 7W	200	620	>90	3000K	72	93	60	S	140°	472-0260790403006	39,00	👍

LED CONVERTER IVY ROUND	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	8,5	200	44	147	44	22	W	24-127570	15,00	👍
	dimmable, DALI dimm.	9,5	180	53	111	52	22	W	24-123395	40,00	👍

IP20

CHICCO ROUND



LED 350mA
excl. incl.
IP65
EEL: A++ - A

INFO	POWER	mA	LUMEN	CRI	LED	Ø	ID	⌀	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, matt powder-coated with fine textured paint, fixed, recessed light source, 30° beam angle, excl. converter	LED 7W	350	530	>90	2700K	90	80	78	S	30°	308-0010790302704	43,00	👍
	LED 7W	350	540	>90	2700K	90	80	78	W	30°	308-0010790302705	43,00	👍
	LED 7W	350	510	>80	2700K	90	80	78	S	30°	308-0010790302706	43,00	👍
	LED 7W	350	560	>90	3000K	90	80	78	S	30°	308-0010790303004	43,00	👍
	LED 7W	350	590	>90	3000K	90	80	78	W	30°	308-0010790303005	43,00	👍
	LED 7W	350	560	>90	3000K	90	80	78	S	30°	308-0010790303006	43,00	👍

LED CONVERTER CHICCO	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	16	350	46	147	44	30	W	24-127530n	15,00	👍
	dimmable, DALI dimm.	17	350	49	111	52	22	W	24-151403	40,00	👍

IP20

CIRCINA



LED 350mA
30°
excl. incl.
IP65
EEL: A++ - A

INFO	POWER	mA	LUMEN	CRI	LED	Ø	ID	⌀	COLOUR	REF	CODE	EURO	STOCK
Recessed spotlight, die-cast aluminium, matt powder-coated with fine textured paint, 30° tilting, recessed light source, 24° beam angle, excl. converter	LED 9W	350	930	>80	3000K	90	74	83	W	24°	305-1419050	69,00	👍
	LED 9W	350	930	>80	3000K	90	74	83	S	24°	305-1419060	69,00	👍
	LED 9W	350	930	>80	3000K	90	74	83	AB	24°	305-14190140	69,00	👍

LED CONVERTER CIRCINA	INFO	W	mA	V DC	L	W	H	COLOUR	CODE	EURO	STOCK
	not dimmable, 230 V AC	16	350	46	147	44	30	W	24-127530n	15,00	👍
	dimmable, DALI dimm.	17	350	49	111	52	22	W	24-151403	40,00	👍

IP20



Projekt: Private residence, Austria
Photo: Molto Luce
Product: CHICCO ROUND

WALL & DEILING OUTDOOR



NEXT



LED 230V IP54 EEI: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	W	H	D	COLOUR	CODE	EURO	STOCK
Wall luminaire, aluminium, matt powder-coated with fine textured paint, tiltable cover for individual light distribution, direct/indirect beam, incl. converter	SYS 7W	230	2x105	>90	3000K	100	100	100		472-291008w	199,00	
	SYS 7W	230	2x105	>90	3000K	100	100	100		472-291008s	199,00	
	SYS 7W	230	2x105	>90	3000K	100	100	100		472-291008bgngl	229,00	
	SYS 7W	230	2x105	>90	3000K	100	100	100		472-291008ag	199,00	

KATHA I



LED 230V IP54 EEI: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	W	H	D	COLOUR	CODE	EURO	STOCK
Wall luminaire in aluminium, matt powder-coated with fine textured paint, tiltable cover for individual light distribution, direct/indirect beam, incl. converter	SYS 7W	230	2x105	>90	3000K	80	68	123		472-645a11w	215,00	
	SYS 7W	230	2x105	>90	3000K	80	68	123		472-645a11s	215,00	

BEN SQUARE



LED 230V IP65 EEI: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	B	H	T	COLOUR	CODE	EURO	STOCK
Wall luminaire, aluminium, matt powder-coated with fine textured paint, rectangular, direct/indirect beam, incl. converter	SYS 9W	230	360	>90	3000K	80	200	80		472-0060890003004	189,00	
	SYS 9W	230	525	>90	3000K	80	200	80		472-0060890003005	189,00	
	SYS 9W	230	320	>90	3000K	80	200	80		472-0060890003011	189,00	



Picture retouch
Photo: Shutterstock
Product: NEXT



INFO	POWER	V	LUMEN	CRI	LED	W	H	D	COLOUR	CODE	EURO	STOCK
Wandleuchte, Aluminiumdruckguss, Feinstruktur matt pulverbeschichtet, direkt/indirekt strahlend, incl. Konverter	SYS 8W	230	2x160	>90	3000K	100	100	45	W	472-260023	179,00	👍
	SYS 8W	230	2x160	>90	3000K	100	100	45	G	472-260024	179,00	👍



INFO	POWER	V	LUMEN	CRI	LED	W	H	D	COLOUR	CODE	EURO	STOCK
Wall luminaire in aluminium, matt powder-coated with fine textured paint, tiltable cover for individual light distribution, direct/indirect beam, incl. converter	SYS 16W	230	550	>90	3000K	150	150	150	W	472-260025	295,00	👍
	SYS 16W	230	480	>90	3000K	150	150	150	G	472-260026	295,00	👍



INFO	POWER	V	LUMEN	CRI	LED	W	H	D	COLOUR	CODE	EURO	STOCK
Wall luminaire, die-cast aluminium, matt powder-coated with fine textured paint, acrylic opal diffuser, AC-LED	SYS 10W	230	642	>90	3000K	100	100	120	G	472-260055s	139,00	👍
	SYS 10W	230	642	>90	3000K	100	100	120	AN	472-260055ag	139,00	👍

Picture retouch
Photo: Shutterstock
Product: ZAHRA




INFO	POWER	V	LUMEN	CRI	LED	Ø	D	COLOUR	CODE	EURO	STOCK
Wall luminaire, die-cast aluminium, matt powder-coated with fine textured paint, opal diffuser and clear glass cover, indirect beam, incl. converter	SYS 10W	230	320	>90	3000K	120	90	<div>S</div>	472-0561090003006	199,00	<div>👍</div>
	SYS 10W	230	320	>90	3000K	120	90	<div>AN</div>	472-0561090003011	199,00	<div>👍</div>




INFO	POWER	V	LUMEN	CRI	LED	W	H	D	COLOUR	CODE	EURO	STOCK
Wall luminaire, die-cast aluminium, matt powder-coated with fine textured paint, direct/indirect beam, opal PMMA diffuser, incl. converter	SYS 7W	230	464	>90	3000K	170	75	45	<div>W</div>	472-643m21w	222,00	<div>👍</div>
	SYS 7W	230	308	>90	3000K	170	75	45	<div>6</div>	472-643m21s	222,00	<div>👍</div>



INFO	POWER	V	LUMEN	CRI	LED	W	H	D	COLOUR	CODE	EURO	STOCK
Wall luminaire, die-cast aluminium, matt powder-coated with fine textured paint, direct/indirect beam, incl. converter	SYS 11W	230	780	>90	3000K	187	100	60	<div>W</div>	472-0030990003005	165,00	<div>👍</div>
	SYS 11W	230	480	>90	3000K	187	100	60	<div>6</div>	472-0030990003004	165,00	<div>👍</div>

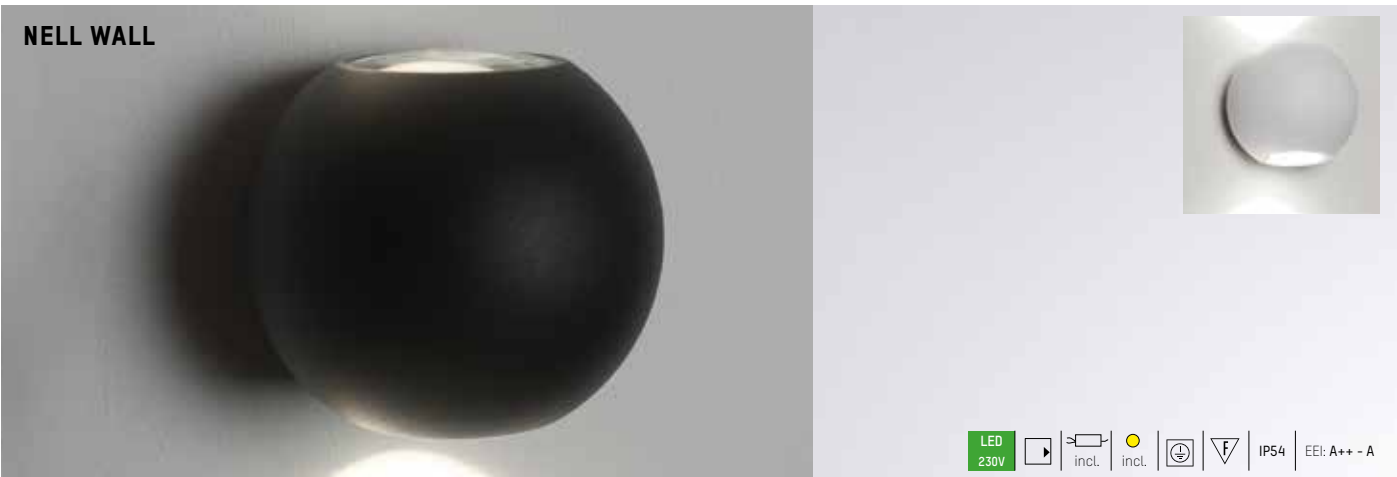

INFO	POWER	V	LUMEN	CRI	LED	Ø	D	COLOUR	REF	CODE	EURO	STOCK
Wall luminaire, die-cast aluminium, matt powder-coated with fine textured paint, spherical shape, glass lens, 80° beam angle, direct/indirect beam, incl. converter	SYS 7W	230	325	>90	3000K	100	88	<div>W</div>	<div>80°</div>	472-3729050	198,00	<div>👍</div>
	SYS 7W	230	275	>90	3000K	100	88	<div>S</div>	<div>80°</div>	472-3729060	198,00	<div>👍</div>

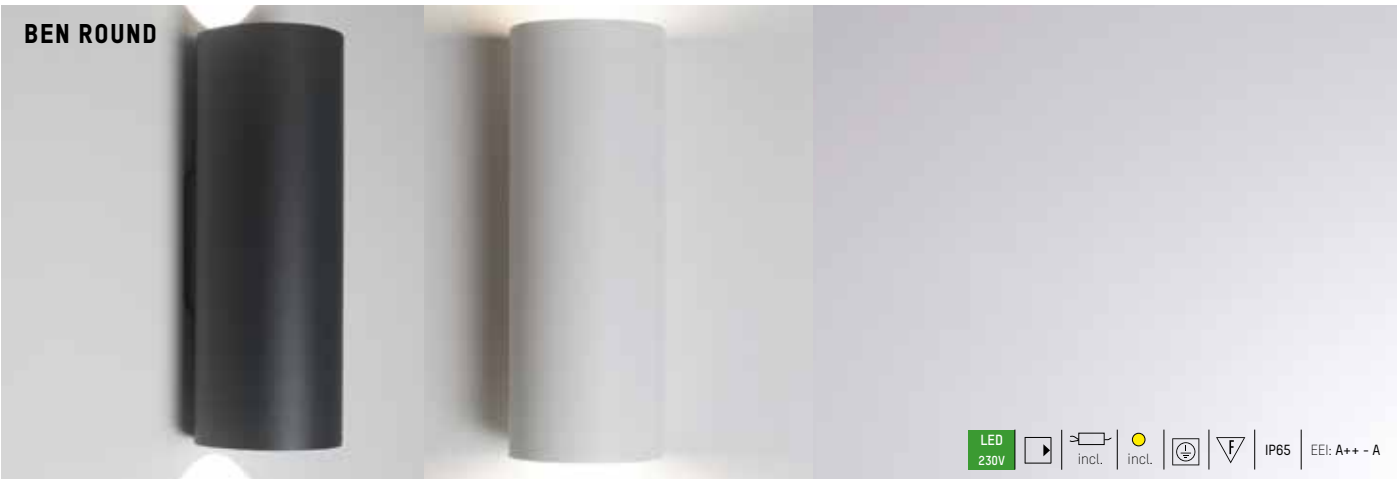

INFO	POWER	V	LUMEN	CRI	LED	Ø	H	D	COLOUR	CODE	EURO	STOCK
Wall luminaire, aluminium, matt powder-coated with fine textured paint, round, direct/indirect beam, incl. converter	SYS 9W	230	2 x 116	>90	3000K	90	250	95	<div>W</div>	472-0050890003005	209,00	<div>👍</div>
	SYS 9W	230	2 x 116	>90	3000K	90	250	95	<div>6</div>	472-0050890003004	209,00	<div>👍</div>
	SYS 9W	230	2 x 116	>90	3000K	90	250	95	<div>AN</div>	472-0050890003011	209,00	<div>👍</div>



INFO	POWER	V	LUMEN	CRI	LED	Ø	H	D	COLOUR	REF	CODE	EURO	STOCK
Wall luminaire, milled and brushed aluminium, direct beam, inkl. converter	SYS 9W	230	535	>80	3000K	79	81	92	<div>AG</div>	<div>20°</div>	472-256002	233,00	<div>👍</div>
	SYS 9W	230	535	>80	3000K	79	81	92	<div>AN</div>	<div>20°</div>	472-256003	233,00	<div>👍</div>

FYNN 0 AC



LED 230V | incl. | IP54 | EEL: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	W	L	H	COLOUR	CODE	EURO	STOCK
Ceiling luminaire, die-cast aluminium, matt powder-coated with fine textured paint, acrylic opal diffuser, AC-LED	SYS 10W	230	790	>90	3000K	100	100	112	W	472-260056w	129,00	👍
	SYS 10W	230	790	>90	3000K	100	100	112	G	472-260056s	129,00	👍
	SYS 10W	230	790	>90	3000K	100	100	112	AN	472-260056ag	129,00	👍

TURN 2



230V HV | 90° | IP54 | EEL: A++ - D

INFO	BULB	SOCKET	V	W	W	H	D	COLOUR	CODE	EURO	STOCK
Surface mounted spotlight, milled aluminium, 90° tilting	RETROFIT	GU10	230	max. 7	88	90	115	AG	472-256012	112,00	👍
	RETROFIT	GU10	230	max. 7	88	90	115	AN	472-256011	112,00	👍



Bildretusche
Foto: Shutterstock
Produkt: TURN 2

BADO IP54 SD



LED 230V  incl.  incl.                                                

DECORATIVE & BOLLARD



GLOBO OUT



230V
HV

☑

☐


▽

IP55

EEL: A++ - D

INFO	BULB	SOCKET	V	W	Ø	COLOUR	CODE	EURO	STOCK
Ball luminaire made of polyethylene, white, UV-resistant, high tensile strength, incl. 2m black connection cable, ground spike and screw base, mounting possible on concrete and ground floors	RETROFIT	E27	230	max. 9	300	wo	292-a30w	123,00	👍
	RETROFIT	E27	230	max. 11	400	wo	292-a40w	158,00	👍
	RETROFIT	E27	230	max. 11	500	wo	292-a50w	188,00	👍
	RETROFIT	E27	230	max. 11	600	wo	292-a60w	266,00	👍

CUBO OUT

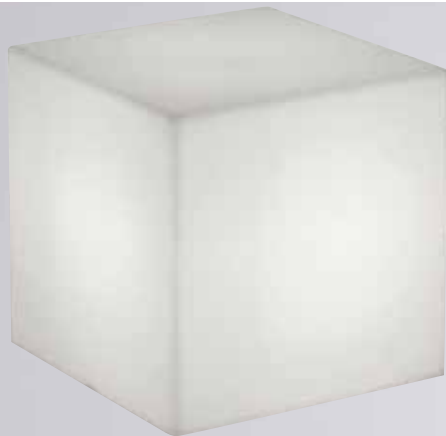

230V
HV

☑

☐


▽

IP55

EEL: A++ - D



INFO	BULB	SOCKET	V	W	L	W	H	COLOUR	CODE	EURO	STOCK
Cubic luminaire made of polyethylene, white, UV-resistant, high tensile strength, incl. 2m black connection cable, ground spike and screw base, mounting possible on concrete and ground floors	RETROFIT	E27	230	max. 9	300	300	300	wo	292-lpcue030	123,00	👍
	RETROFIT	E27	230	max. 11	430	430	430	wo	292-lpcue040	137,00	👍

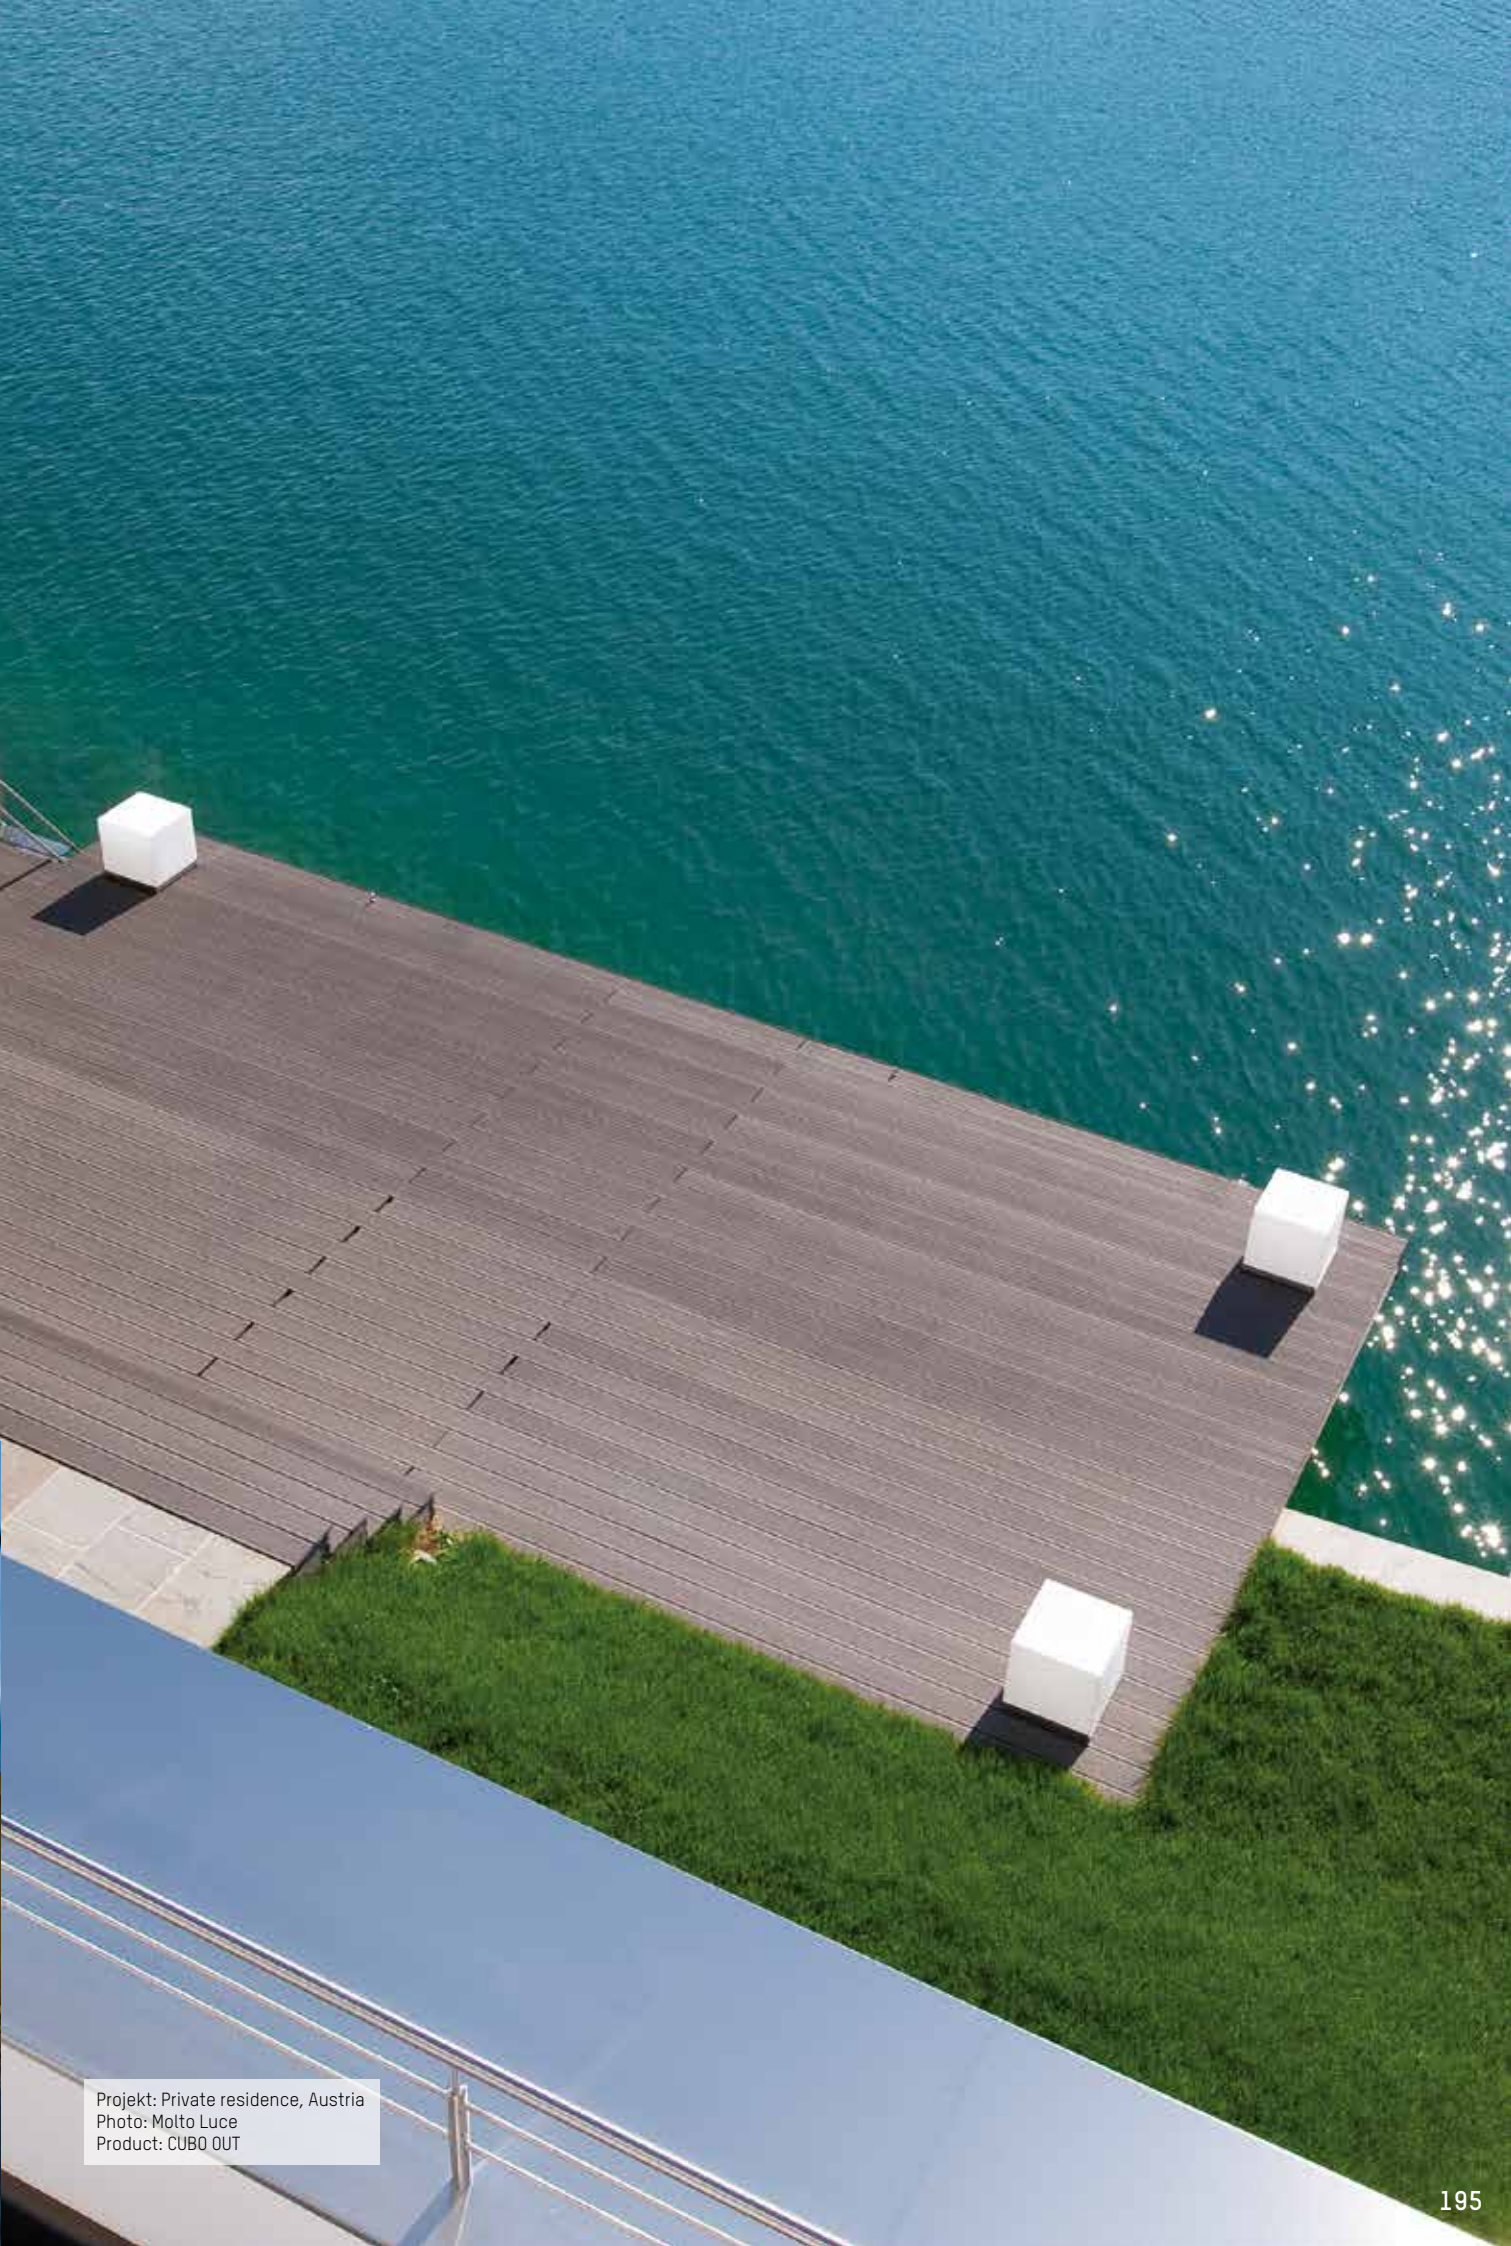Project: Molto Luce, Wels, Austria
Photo: Molto Luce
Product: GLOBO OUT





Projekt: Private residence, Austria
Photo: Molto Luce
Product: CUBO OUT





INFO	POWER	V	LUMEN	CRI	LED	W	D	H	COLOUR	CODE	EURO	STOCK
Bollard luminaire, AC-LED, die-cast aluminium, matt powder-coated with fine textured paint, acrylic opal diffuser	SYS 10W	230	642	>90	3000K	100	100	900	6	472-260057s	289,00	
	SYS 10W	230	642	>90	3000K	100	100	900	AN	472-260057ag	289,00	



INFO	POWER	V	LUMEN	CRI	LED	W	D	H	COLOUR	CODE	EURO	STOCK
Bollard luminaire, aluminium, matt powder-coated with fine textured paint, incl. converter	SYS 7W	230	263	>90	3000K	150	50	600	6	472-686013c60s	365,00	
	SYS 7W	230	263	>90	3000K	150	50	300	6	472-685813c30s	290,00	



INFO	POWER	V	LUMEN	CRI	LED	Ø	H	COLOUR	CODE	EURO	STOCK
Bollard luminaire, die-cast aluminium, matt powder-coated with fine textured paint, opal diffuser and transparent cover, indirect beam, incl. converter	SYS 13W	230	390	>90	3000K	120	900	S	472-0571390003006	349,00	
	SYS 13W	230	390	>90	3000K	120	900	AN	472-0571390003011	349,00	



Projekt: Private residence, Austria
Photo: Molto Luce
Product: CITI


YARA ROUND FLAT



LED 230V
incl. incl.
IP65
EEL: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	Ø	H	COLOUR	CODE	EURO	STOCK
Bollard luminaire, die-cast aluminium, matt powder-coated with fine textured paint, clear polycarbonate diffuser, 360° beam angle, incl. converter	SYS 10W	230	800	>80	3000K	165	800	6	273-1000s	238,00	👍

YARA SQUARE FLAT

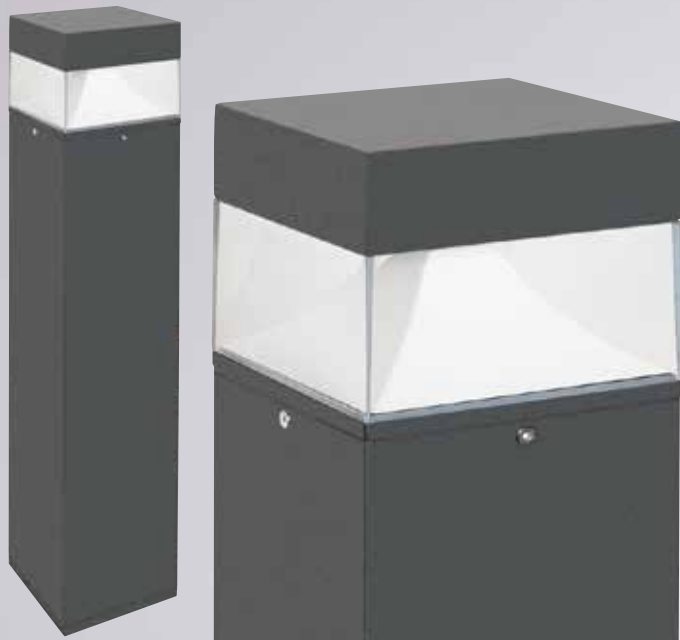

LED 230V
incl. incl.
IP65
EEL: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	L	D	H	COLOUR	CODE	EURO	STOCK
Bollard luminaire, die-cast aluminium, matt powder-coated with fine textured paint, clear polycarbonate diffuser, 360° beam angle, incl. converter	SYS 10W	230	800	>80	3000K	150	150	800	6	273-1002s	275,00	👍



Picture retouch
Photo: Shutterstock
Product: YARA ROUND FLAT

PROJECTORS










PROJECTORS

PROJECTORS



FORIS



INFO	POWER	V	LUMEN	CRI	LED	Ø	H	COLOUR	REF	CODE	EURO	STOCK
Spotlight, die-cast aluminium, matt powder-coated, AC-LED, luminaire head 330° swiveling and 90° tilting, incl. ground spike	SYS 10W	230	740	>80	3000K	100	140			341-0011080503011	165,00	
Anti-glare ring in two performances to be ordered separately as accessory ATTENTION: Lumen values are reduced when the glare control rings are mounted.	ANTI-GLARE RING		INFO		LUMEN BY MOUNTING		Ø	H	COLOUR	CODE	EURO	STOCK
			Diagonal glare control ring with screw cap, die-cast aluminium, matt powder-coated, suitable for FORIS spotlights		525		102	100		341-7000	39,00	
	ANTI-GLARE GRID		INFO		LUMEN BY MOUNTING		Ø	H	COLOUR	CODE	EURO	STOCK
		Straight anti-glare cross grid with screw cap, die-cast aluminium, matt powder-coated, suitable for FORIS spotlights		550		102	40		341-7001	29,00		

HARK AC



INFO	POWER	V	LUMEN	CRI	LED	Ø	W	H	COLOUR	REF	CODE	EURO	STOCK
Surface mounted spotlight, AC-LED, die-cast aluminium, matt powder-coated with fine textured paint, glass diffuser, 40° beam angle, 350° swiveling and 90° tilting, incl. ground spike	SYS 4W	230	255	>80	3000K	54	80	96	AN	40°	472-0250480403011	139,00	👍















































Projekt: Private residence, Austria
Photo: Molto Luce
Product: HARK AC

LEVI AC W



LED 230V
90° 350° incl.
IP54
EEL: A++ - A

INFO	POWER	V	LUMEN	CRI	LED	Ø	H	L	ØxH SOCKET	COLOUR	REF	CODE	EURO	STOCK
Spot with wall bracket in aluminium, black, white or silver powder-coated surface, head 350° swivelling and 90° tilting, flush satined PMMA diffuser, glare ring in 2 versions, please order separately	SYS 10W	230	600	>80	3000K	90	30	688	90 x 37			611-110194	233,00	
	SYS 10W	230	600	>80	3000K	90	30	688	90 x 37			611-110195	233,00	
	SYS 10W	230	600	>80	3000K	90	30	688	90 x 37			611-110196	233,00	
	SYS 10W	230	600	>80	4000K	90	30	688	90 x 37			611-110144	233,00	
	SYS 10W	230	600	>80	4000K	90	30	688	90 x 37			611-110145	233,00	
	SYS 10W	230	600	>80	4000K	90	30	688	90 x 37			611-110146	233,00	
	SYS 10W	230	600	>80	3000K	90	30	388	90 x 37			611-210194	228,00	
	SYS 10W	230	600	>80	3000K	90	30	388	90 x 37			611-210195	228,00	
	SYS 10W	230	600	>80	3000K	90	30	388	90 x 37			611-210196	228,00	
	SYS 10W	230	600	>80	4000K	90	30	388	90 x 37			611-210144	228,00	
	SYS 10W	230	600	>80	4000K	90	30	388	90 x 37			611-210145	228,00	
	SYS 10W	230	600	>80	4000K	90	30	388	90 x 37			611-210146	228,00	
ANTI-GLARE RING				INFO						Ø	COLOUR	CODE	EURO	STOCK
				Diagonal glare control ring with bayonet lock, aluminium, matt powder-coated with fine textured paint, suitable for LEVI AC spotlights						85		651-000024	17,00	
										85		651-000025	17,00	
										85		651-000026	17,00	
				Straight glare control ring with bayonet lock, aluminium, matt powder-coated with fine textured paint, suitable for LEVI AC spotlights						85		651-000014	17,00	
										85		651-000015	17,00	
										85		651-000016	17,00	

indiya

Project: Restaurant Indiya, Wels, Austria
Photo: Molto Luce
Product: LEVI AC W

JIB



INFO	POWER	V	LUMEN	CRI	LED	L	W	H	COLOUR	REF	CODE	EURO	STOCK
Luminaire with arm, die-cast aluminium, matt powder-coated, AC-LED, head 90° tilting and 320° swiveling. Mounting indication: only direct beam!	SYS 8W	230	475	>80	3000K	650	95	236	SM	150°	341-0000880503004	165,00	👍
	SYS 8W	230	475	>80	3000K	650	95	236	AN	150°	341-0000880503011	165,00	👍

VIDERI LONG



INFO	POWER	V	LUMEN	CRI	LED	L	W	H	COLOUR	REF	CODE	EURO	STOCK
Luminaire with arm, die-cast aluminium, matt powder-coated, AC-LED, head 120° tilting and 140° swiveling. Mounting indication: only direct beam!	SYS 15W	230	910	>80	3000K	680	130	95	SM	120°	341-0021580003004	187,00	👍
	SYS 15W	230	910	>80	3000K	680	130	95	AN	120°	341-0021580003011	187,00	👍

VIDERI SHORT




INFO	POWER	V	LUMEN	CRI	LED	L	W	H	COLOUR	REF	CODE	EURO	STOCK
Luminaire with arm, die-cast aluminium, matt powder-coated, AC-LED, head 120° tilting and 140° swiveling. Mounting indication: only direct beam!	SYS 15W	230	910	>80	3000K	200	130	95	SM	120°	341-0031580003004	167,00	👍
	SYS 15W	230	910	>80	3000K	200	130	95	AN	120°	341-0031580003011	167,00	👍




Picture retouch
Poto: Molto Luce
Product: JIB

TRANSFORMERS


ELECTRONIC TRANSFORMER

INFO	W	LxWxH	COLOUR	CODE	EURO	STOCK
 <div>Symbolic picture</div>	10-60	94x31x20	W	24-119654	11,50	
	20-60	128x38x28	W	24-119910	11,00	
	20-105	128x38x28	W	24-119730	12,50	
	30-150	166x47x35	W	24-119851u	23,00	
	50-210*	180x45x40	W	24-119475c	35,50	
	50-250*	180x45x40	W	24-119475	42,00	
	electronic driver, white, dimmable with leading edge / trailing edge, thermal progressive fuse (NTC), protections against short circuits and against overloads on secondary side; automatic recovery, electromagnetic compatibility, radio interference filter according to EN55014/5, transformer fixing by eyelets and screws, terminal cover with integrated strain relief, primary 2,5mm², secondary up to 2.5mm² (60-105VA) respectively up to 6mm² (150VA), only trailing edge dimmable (210 and 250VA)					


SAFETY ISOLATION TRANSFORMER

INFO	W	LxWxH	COLOUR	CODE	EURO	STOCK
 <div>Symbolic picture</div>	20	64x54x48	W	205-20	23,00	
	60	83x69x60	W	205-60	35,50	
	105	88x74x79	W	205-105	42,00	
	150	101x85x85	W	205-150	53,50	
	200	101x85x99	W	205-200	61,50	
	250	101x85x99	W	205-250	66,00	
	300	101x85x99	W	205-300	90,50	
	400	140x117x116	W	205-400	116,00	
	safety isolation transformer 41.020.10, white, observe installation instructions VDE 100 part 523/6.81 and part 430/6.81, dimmable with dimmer for inductive loads (leading edge) input voltage: 230V +-10%, power output 12V+, frequency 50-60Hz, ambient temperature max. 40°C					


ELECTRONIC TRANSFORMER

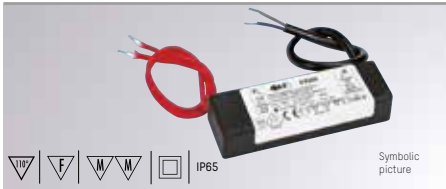INFO	W	LxWxH	COLOUR	CODE	EURO	STOCK
 <div>Symbolic picture</div>	20-60	104x30x21	S	75-pr60	16,00	
	20-105	134x30x21	S	75-pr105	22,00	
electronic driver, black, spilled, dimmable with trailing edge, thermal progressive fuse (NTC), protections against short circuits and against overloads on secondary side; electromagnetic compatibility, radio interference filter according to EN55014/5, connection with stranded wire length 200mm, primary line 2x 0,75mm², double isolated, secondary line 2x 0,75mm², ambient temperature -10° up to +40°						


ELECTRONIC TRANSFORMER

INFO	W	ØxH	COLOUR	CODE	EURO	STOCK
 <div>Symbolic picture</div>	20-60	53x19	W	24-119640	14,00	
	20-105	70x22	W	24-119618	120,00	
electronic driver, white, round, dimmable with leading edge / trailing edge, thermal progressive fuse (NTC), protections against short circuits and against overloads on secondary side; automatic recovery, electromagnetic compatibility, radio interference filter according to EN55014/5, output voltage 12V						

ELECTRONIC TRANSFORMER

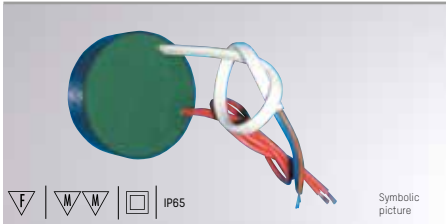
INFO	W	ØxH	CODE	EURO	STOCK
 <div>Symbolic picture</div>	20-70	53x19	75-tr70	15,00	
	35-105	70x22	75-tr105	21,00	
electronic driver, round, spilled, dimmable with trailing edge, thermal progressive fuse (NTC), protections against short circuits and against overloads on secondary side; automatic recovery, electromagnetic compatibility, radio interference filter according to EN55014/5, primary line and secondary cable 170/200mm, input voltage 240V +- 10%, output voltage 12V, frequency 50-60Hz, ambient temperature max. 40°C					

ELECTRONIC TRAFNSFORMER SPECIAL FOR LED RETROFIT


INFO	W	LxWxH	FOR	COLOUR	CODE	EURO	STOCK
 <div>Symbolic picture</div>	70	123x34x21	1-70W Halogen Bulb 1-50W LED Retrofit	W	24-119772	24,00	
electronic transformer for LED Retrofit lamps, output voltage 12V, dimmable with leading edge / trailing edge,							

CONSTANT CURRENT CONVERTER

LED CONVERTER STM/U

INFO	W	mA	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
 <div>Symbolic picture</div>	6	250	24	42x40 x22	S	24-122812	17,00	
	8	350	24	42x40 x22	S	24-122811	17,00	
	6	500	12	42x40 x22	S	24-122813	17,00	
	6	700	12	42x40 x22	S	24-122815	17,00	
	LED-CONVERTER, not dimmable, 230 V AC							


LED CONVERTER BULL/U

INFO	W	mA	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
 <div>Symbolic picture</div>	9	250	36	60x35x21,5	W	24-122599	20,00	
	4	350	12	60x35x21,5	W	24-122596	18,00	
	8	350	24	60x35x21,5	W	24-122598	18,00	
	6	500	12	60x35x21,5	W	24-122602	19,00	
	LED-CONVERTER, not dimmable, 230 V AC							


LED CONVERTER STC/U

INFO	W	mA	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
 <div>Symbolic picture</div>	8	350	24	51x31x21	S	24-122633	15,00	
	6	500	12	51x31x21	S	24-122635	15,00	
LED-CONVERTER, not dimmable, 230 V AC								


LED CONVERTER SLIM/U

INFO	W	mA	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
 <div>Symbolic picture</div>	15	350	43	142x22x19	W	24-122440	24,00	
LED-CONVERTER, not dimmable, 230 V AC								


LED CONVERTER PMR

INFO	W	mA	V DC	ØxH	COLOUR	CODE	EURO	STOCK
 <div>Symbolic picture</div>	8,4	700	12	53x19	W	75-pmr12	18,00	
LED-CONVERTER, not dimmable, 230 V AC								


LED CONVERTER MPL

INFO	W	mA	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
 <div>Symbolic picture</div>	1,5	350	6	51x32x18	S	75-mpl1	11,50	
	4	350	12	51x32x18	S	75-mpl3	11,50	
	2	700	6	51x32x18	S	75-mpl4	13,00	
	4	500	9	51x32x18	S	75-mpl5	12,00	
LED-CONVERTER, not dimmable, 230 V AC								

LED CONVERTER STPM/U IP54


INFO	W	mA	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
 <div>Symbolic picture</div>	8	350	24	44x46x26,5	S	24-122800	27,00	
	6	500	12	44x46x26,5	S	24-122802	27,00	
	6	700	12	44x46x26,5	S	24-122804	27,00	
LED-CONVERTER, not dimmable, 230 V AC								

LED CONVERTER DCC/U S IP54


INFO	W	mA	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
 <div>Symbolic picture</div>	15	350	43	133x40,5x20	W	24-122370	32,50	
LED-CONVERTER, not dimmable, 230 V AC								

CONSTANT CURRENT CONVERTER


LED CONVERTER SUPER PRO

INFO	W	mA	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
 <div>Symbolic picture</div>	LED-CONVERTER, not dimmable, 230 V AC							
	16	350	59	147x44x30	<div>W</div>	24-127530n	15,00	<div></div>
	23	500	59	147x44x30	<div>W</div>	24-127532n	15,00	<div></div>
	32	700	59	147x44x30	<div>W</div>	24-127534n	15,00	<div></div>
	38	900	59	147x44x30	<div>W</div>	24-127536n	18,00	<div></div>
	42	1050	55	147x44x30	<div>W</div>	24-127538n	18,00	<div></div>


LED CONVERTER PRO FLAT 22

INFO	W	mA	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
 <div>Symbolic picture</div>	LED-CONVERTER, not dimmable, 230 V AC						15,00	<div></div>
	5,5 - 22	125 - 500	44	147x44x22	<div>W</div>	24-127570		<div></div>
adjustable via DIP switch:								
mA	W	V DC	mA	W	V DC			
125	5,5	44	325	14	44			
150	6,5	44	350	15	44			
175	7,5	44	375	16,5	44			
200	8,5	44	400	17,5	44			
225	9,5	44	425	18,5	44			
250	11	44	450	19,5	44			
275	12	44	475	21	44			
300	13	44	500	22	44			


LED CONVERTER UNIVERSALE 20

 <div>Symbolic picture</div>	INFO		W	mA	V DC	LxWxH	COLOR	CODE	EUR	STOCK
	LED-CONVERTER, not dimmable, 230 V AC		13 - 20	250 - 700	57 - 28	111x52x22	<div>W</div>	24-122201	24,00	<div>👍</div>
	Eiadjustable via DIP switch:									
	CONSTANT CURRENT									
	mA	W	V DC	mA	W	V DC				
	250	13	54	500	20	40				
	350	19	54	550	20	37				
	400	20	50	600	20	34				
	450	20	44	700	20	29				
	CONSTANT VOLTAGE									
W	V DC									
16	24									


LED CONVERTER PROFESSIONALE 34

INFO	W	mA	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
 <div>Symbolic picture</div>	LED-CONVERTER, not dimmable, 230 V AC						21,00	<div></div>
	12 - 34	250 - 700	50 - 48	130x42x30	<div>W</div>	24-127480		<div></div>
adjustable via DIP switch:								
mA	W	V DC	mA	W	V DC			
250	12	50	500	25	50			
300	15	50	550	27	50			
350	17	50	600	30	50			
400	20	50	650	32	49			
450	22	50	700	34	48			

LED CONVERTER PROFESSIONALE 42


INFO	W	mA	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
 <div>Symbolic picture</div>	LED-CONVERTER, not dimmable, 230 V AC						22,00	<div></div>
	13 - 42	300 - 1050	44 - 40	130x42x30	<div>W</div>	24-127484		<div></div>
adjustable via DIP switch:								
mA	W	V DC	mA	W	V DC			
300	13	44	700	31	44			
350	15	44	750	32	44			
400	18	44	800	33	42			
450	20	44	850	35	42			
500	22	44	900	38	42			
550	24	44	950	40	42			
600	27	44	1000	42	42			
650	29	44	1050	42	40			

LED CONVERTER MP 50 K3


INFO	W	mA	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
 <div>Symbolic picture</div>	LED-CONVERTER, not dimmable, 230 V AC						47,00	<div></div>
	25 - 50	350 - 1050	74 - 48	124x79x22	<div>W</div>	24-122204		<div></div>
adjustable via DIP switch:								
mA	W	V DC	mA	W	V DC			
350	25	74	750	50	66			
500	35	72	850	50	58			
550	39	72	900	50	55			
650	46	72	1050	50	48			
700	50	71						

CONSTANT CURRENT CONVERTER



LED CONVERTER MP 50 TCM

INFO	W	mA	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
 <div>Symbolic picture</div>	LED-CONVERTER, not dimmable, 230 V AC, for through-wiring						59,50	
	25 - 50	350 - 1050	74 - 48	174x83x35	<div>W</div>	24-1222044		
adjustable via DIP switch:								
mA	W	V DC	mA	W	V DC			
350	25	74	750	50	66			
500	35	72	850	50	58			
550	39	72	900	50	55			
650	46	72	1050	50	48			
700	50	71						

LED CONVERTER MP 55 HC TCM

INFO	W	mA	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
 <div>Symbolic picture</div>	LED-CONVERTER, not dimmable, 230 V AC, for through-wiring						59,50	<div></div>
	45 - 55	1050 - 2100	44 - 26	174x83x35	<div>W</div>	24-1222084		<div></div>
adjustable via DIP switch:								
mA	W	V DC	mA	W	V DC			
1050	45	44	1600	55	35			
1200	52	44	1750	55	30			
1400	55	39	2100	55	26			


LED CONVERTER MINI JOLLY 20

	INFO			W	mA	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
	LED-CONVERTER, 1-10V & PUSH dimmable, 230 V AC			13 - 20	250 - 900	53- 23	111x52x22	<div>W</div>	24-151400	36,50	
	adjustable via DIP switch:										
	CONSTANT CURRENT										
	mA	W	V DC	mA	W	V DC					
	250	13	53	600	20	34					
	300	15	52	650	20	31					
	350	18	50	700	20	29					
	400	20	50	750	20	27					
	450	20	45	800	20	25					
500	20	40	850	20	24						
550	20	37	890	20	23						
CONSTANT VOLTAGE											
W	V DC										
10	12										
20	24										


IP20

Symbolic picture










LED CONVERTER MINI JOLLY LC 20

 <div>Symbolic picture</div>	INFO			W	mA	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
	LED-CONVERTER, 1-10V & PUSH dimmable, 230V AC			5,4 - 20	100 - 380	54	111x52x22	<div>W</div>	24-123401	36,50	<div></div>
	adjustable via DIP switch:										
	CONSTANT CURRENT										
	mA	W	V DC	mA	W	V DC					
100	5,8	54	260	14	54						
140	7,5	54	300	16	54						
180	9,5	54	340	18	54						
220	12	54	380	20	54						
CONSTANT VOLTAGE											
W		V DC									
9		24									

LED CONVERTER MINI JOLLY DALI 20


			INFO			W	mA	V DC	LxWxH	COLOR	CODE	EURO	STOCK		
<div>Symbolic picture</div>			LED-CONVERTER, DALI dimmable, 230V AC			12 - 20	250 - 700	49 - 28	111x52x22	<div>W</div>	24-151403	40,00	<div></div>		
			adjustable via DIP switch:												
			CONSTANT CURRENT												
			mA	W	V DC	mA	W	V DC							
			250	12	49	500	20	40							
			350	17	49	550	20	36							
			400	19	49	600	20	33							
			450	20	45	700	20	28							
			CONSTANT VOLTAGE												
			W	V DC											
			16	24											

LED CONVERTER MINI JOLLY LC DALI


 <div></div> <div>Symbolic picture</div>	INFO		W		mA	V DC	LxWxH	COLOR	CODE	EURO	STOCK
	LED-CONVERTER, DALI dimmable, 230V AC		5,4 - 20	100 - 380	54- 51	111x52x22		24-123395	40,00		
	adjustable via DIP switch:										
	CONSTANT CURRENT										
	mA	W	V DC	mA	W	V DC					
100	5,3	54	260	14	52						
140	7,5	54	300	16	52						
180	9,5	53	340	18	51						
220	12	53	380	20	51						
CONSTANT VOLTAGE											
W	V DC										
9	24										

CONSTANT CURRENT CONVERTER





LED CONVERTER PROFESSIONALE 36

INFO			W	mA	V DC	LxWxH	COLOR	CODE	EURO	STOCK																																																						
<div><div>Symbolic picture</div></div> <div>LED-CONVERTER, DALI dimmable, 230V AC</div> <div>adjustable via DIP switch: CONSTANT CURRENT</div> <table><thead><tr><th>mA</th><th>W</th><th>V DC</th><th>mA</th><th>W</th><th>V DC</th></tr></thead><tbody><tr><td>300</td><td>16</td><td>54</td><td>700</td><td>36</td><td>51</td></tr><tr><td>350</td><td>18,5</td><td>54</td><td>750</td><td>36</td><td>48</td></tr><tr><td>400</td><td>21,5</td><td>54</td><td>800</td><td>36</td><td>45</td></tr><tr><td>450</td><td>24</td><td>54</td><td>850</td><td>36</td><td>42</td></tr><tr><td>500</td><td>27</td><td>54</td><td>900</td><td>36</td><td>40</td></tr><tr><td>550</td><td>29,5</td><td>54</td><td>950</td><td>36</td><td>37,5</td></tr><tr><td>600</td><td>32</td><td>54</td><td>1000</td><td>36</td><td>36</td></tr><tr><td>650</td><td>35</td><td>54</td><td>1050</td><td>36</td><td>34</td></tr></tbody></table>			mA	W	V DC	mA	W	V DC	300	16	54	700	36	51	350	18,5	54	750	36	48	400	21,5	54	800	36	45	450	24	54	850	36	42	500	27	54	900	36	40	550	29,5	54	950	36	37,5	600	32	54	1000	36	36	650	35	54	1050	36	34	16 - 36	300 - 1050	54- 34	147x44x30	<div>W</div>	24-127490	46,00	<div>👍</div>
mA	W	V DC	mA	W	V DC																																																											
300	16	54	700	36	51																																																											
350	18,5	54	750	36	48																																																											
400	21,5	54	800	36	45																																																											
450	24	54	850	36	42																																																											
500	27	54	900	36	40																																																											
550	29,5	54	950	36	37,5																																																											
600	32	54	1000	36	36																																																											
650	35	54	1050	36	34																																																											

LED CONVERTER MAXI JOLLY SV DALI 50



Symbolic picture



IP20

INFO

LED-CONVERTER, 1-10V, PUSH & DALI dimmable, 230V AC

adjustable via DIP switch:

mA	W	V DC	mA	W	V DC
350	18,5	53	800	39,5	53
400	21	53	850	42	53
450	23,5	53	900	45	53
500	26,5	53	950	47,5	52
550	29	53	1000	50	50
600	31,5	53	1050	50	48
650	34,5	53	1100	50	45
700	34,5	53	1150	50	43

W

mA

V DC

LxWxH

COLOUR

CODE

EURO

STOCK

18,5 - 50

350 - 1200


53- 41

124x79x22

W

24-151504

71,00





LED CONVERTER MAXY JOLLY TC DALI 55

INFO			W		mA	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
LED-CONVERTER, 1-10V, PUSH & DALI dimmable, 230V AC, for through-wiring			15 - 55		300 - 1200	52 - 46	169x83x35	<div>W</div>	24-123164	83,50	<div></div>
adjustable via DIP switch:											
mA	W	V DC	mA	W	V DC						
300	15	52	800	40	50						
350	17	52	850	42	50						
400	20	50	900	45	50						
450	22	50	950	47	50						
500	25	50	1000	49	49						
550	27	50	1050	51	49						
600	30	50	1100	53	49						
650	32	50	1150	55	48						
700	35	50	1200	55	46						
750	37	50									

IP20

Symbolic picture

LED CONVERTER MAXI JOLLY HC TC 55


 <div>Symbolic picture</div>			INFO			W	mA	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
			LED-CONVERTER, 1-10V, PUSH & DALI dimmable, 230 V AC, for through-wiring			45 - 55	1050 - 2100	44 - 26	169x83x35	<div>W</div>	24-123170	90,50	
			adjustable via DIP switch:										
			mA	W	V DC	mA	W	V DC					
			1050	45	44	1600	55	35					
			1200	52	44	1750	55	30					
			1400	55	39	2100	55	26					

SYNCHRONISATIONSKABEL FOR MAXI JOLLY


INFO	L	COLOUR	CODE	EURO	STOCK
FOR MAXI JOLLY LED-CONVERTER	1500	<div>W</div>	24-485720512	6,00	<div>👍</div>

CONSTANT VOLTAGE CONVERTER


LED CONVERTER VST

INFO	W	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
<div><div>Symbolic picture</div></div> <div>LED CONVERTER FOR LED Strips, not dimmable, 230V AC</div>	50	24	225x60x36	<div>W</div>	24-122752	78,00	<div>👍</div>
	70	24	225x60x36	<div>W</div>	24-122750	97,00	<div>👍</div>
	150	24	240x60x49	<div>W</div>	24-122754n	102,00	<div>👍</div>


LED CONVERTER SLIM/U

INFO	W	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
<div><div>Symbolic picture</div></div> <div>LED CONVERTER FOR LED Strips, not dimmable, 230V AC</div>	13	24	158x22x19	<div>W</div>	24-122442	24,00	<div>👍</div>


LED CONVERTER EFU

INFO	W	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
<div><div>Symbolic picture</div></div> <div>LED CONVERTER FOR LED Strips, not dimmable, 230V AC</div>	25	24	146x55x19	<div>W</div>	24-122322	21,00	<div>👍</div>


LED CONVERTER VPS LP

INFO	W	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
<div><div>Symbolic picture</div></div> <div>LED CONVERTER FOR LED Strips, not dimmable, 230V AC</div>	30	24	190x46x17	<div>W</div>	24-127901	20,50	<div>👍</div>
	50	24	167x59x28,5	<div>W</div>	24-127903	49,00	<div>👍</div>
	75	24	184x61x28,5	<div>W</div>	24-127905	60,50	<div>👍</div>


LED CONVERTER ST2 IP67

INFO	W	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
<div><div>Symbolic picture</div></div> <div>LED CONVERTER FOR LED Strips, not dimmable, 230V AC</div>	70	24	225x66x51	<div>S</div>	24-122479	103,00	<div>👍</div>
	150	24	225x66x51	<div>S</div>	24-122511	223,00	<div>👍</div>


LED CONVERTER HLG IP67

INFO	W	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
<div><div>Symbolic picture</div></div> <div>Overload protection by current limitation protected against short circuit with automatic restart, overload, overvoltage built-in active PFC circuit breaker, 240W, 24V</div>	240	24	244x68x39	<div>W</div>	647-hlg24024	167,00	<div>👍</div>




LED CONVERTER VSTR 1-10V / PUSH / IR

INFO	W	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
<div><div>Symbolic picture</div></div> <div>LED converter for LED stripes, dimmable 1-10V & Push Dimm., order IR accessories separately 3 x 40W RGB 1 x 100W white</div>	3x 40 (RGB) 1x 100W weiß	24	240x60x49	<div>W</div>	24-122730	155,00	<div>👍</div>




LED CONVERTER QT DALI

INFO	W	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
<div><div>Symbolic picture</div></div> <div>LED CONVERTER FOR LED Strips, DALI dimmable, 230V AC</div>	50	24	350x32x22	<div>W</div>	28-452916	109,00	<div>👍</div>
	80	24	345x32x22	<div>W</div>	28-452893	139,00	<div>👍</div>




DALI REPEATER SO DALI CONTROL UNIT

INFO	LxWxH	CODE	EURO	STOCK
 DALI signal amplifier (repeater) Extension of DALI systems by 64 ECGs each. The ECGs connected to the repeater operate as a group Touch DIM control of 64 DALI ECGs each (without integrated load contact), for luminaire installation.	198x30x21	28-292599	191,00	
 IP20				




DALI REPEATER SO DALI CONTROL UNIT

INFO	LxWxH	CODE	EURO	STOCK
 DALI signal amplifier / control unit with TOUCH-DIMM, input for max. 64 DALI ECGs, Control with any commercially available pushbutton, DALI output allowed the control of OSRAM strange DALI-ECGs (Philips, Tridonic etc.), with TOUCH-DIMM function, 230V, 50-60Hz	72x96x62	28-301093	229,00	
 IP20				




DALI MCU DALI CONTROL UNIT

INFO	BxH	ET	ORIFICE BxH	CODE	EURO	STOCK
 DALI MCU rotary control for max. 25 DALI ECGs, up to 4 DALI MCUs can be used in parallel, compatible with covers from Becker, Siemens and Gira; for more detailed information please use the current OSRAM catalogue, 230V / 50-60Hz, incl. cover (80x80mm), cream white	71x71	50	80x80	28-189721	128,00	
 IP20						



DALI PCU CONTROL UNIT

INFO	LxWxH	CODE	EURO	STOCK
 DALI PCU control unit (push-button input / DALI output for 25 DALI units) for installation in flush-mounted box	48x48x22	28-955622	151,00	
 IP20				




DALIECO CONTROL CONTROL UNIT

INFO	LxWxH	CODE	EURO	STOCK
 2-channel light control unit with DALI interface; connection for up to 32 electronic ballasts possible, outputs with electronically reversible over-temperature protection, short-circuit protection, overload protection	118x30x21	28-988645	58,50	
 IP20				



DALIECO CI KIT

INFO	CODE	EURO	STOCK
 Strain relief kit for DALIECO control unit, required for external installation of DALICECO CONTROL unit (ceiling installation)	28-392091	15,50	



DALIECO LS/PD LI

INFO	LxWxH	CODE	EURO	STOCK
 Light and presence sensor for workstations, presence detection via passive IR element, presence detection range via integrated shutter between 40 ... 90° adjustable, function display with two-colour LED, integrated infrared remote control receiver, maximum installation height 5m, order external mounting accessories separately	48x15x17	28-988652	56,50	
 IP20				


DALIECO RECESSED ADAPTER

INFO	ØxHxCUTOUT	CODE	EURO	STOCK
 recessed ceiling adapter for DALIECO sensors (LS/PD)	80x36x68	28-920293	38,50	


DALIECO SURFACE HOUSING

INFO	LxWxH	CODE	EURO	STOCK
 surface mounted housing for DALIECO sensors (LS/PD)	65x65x34	28-173385	45,00	




DALIECO REMOTE KIT MASTER

INFO	LxWxH	CODE	EURO	STOCK
 Remote control (master) for configuration and commissioning of the DALIECO lighting control system, digital IR transmission with a range of up to 10m, LEDs for indication of operating and programming mode and signal transmission, with PC interface, included in the delivery: remote control, 2 button cells type CR2032, USB connection cable, DALIECO PC software	230x45x13	28-195967	175,00	




DALIECO REMOTE USER

INFO	LxWxH	CODE	EURO	STOCK
 Remote control (user) for the DALIECO lighting control system for manual control of up to 15 systems, digital IR transmission with a range of up to 10m, The following control options are possible with this remote control: independent dimming and switching of two lighting groups / central switching of two lighting groups / storage and retrieval of 4 lighting scenes. Temporary deactivation of the presence detection (holiday function). Included in the delivery: Remote control, 2 button cells type CR2032	230x33x10	28-826435	85,50	





DIMMER FOR RGB-LED, DMX 512 OR DALI

INFO	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
 Dimmer for LED-RGB stripes 12-24V DC, Attention: order 12V DC or 24V DC converter separately Control input 1 suitable for DALI Control input 2 suitable for DMX 512 Input 12-24V DC / output 3 x 12-24V dimm., max. load 2A per channel	12-24	110x70x23	W	75-dmx200	44,00	
 IP20						




RGBW RADIO DIMMER

INFO	W	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
 4-channel RGBW radio dimmer for control of RGBW, RGB or white LED stripes, max. load 5A per channel, order power supply separately	240 - 720W	12-36	178x46x19	W	711-000305	130,00	
 IP20							





UNIVERSAL DIMMER

INFO	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
 Universal dimmer 1 channel, separate control input for DALI, 1-10V, Push. Sync connection for up to 9 slaves at 1-10V and Push control,	12-50	153x30x21	W	322-ud3000	99,00	
 IP20				322-ud7001	8,00	

DMX RGBW LED DIMMER


INFO	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
 RGBW LED dimmer DMX 12-36V, 12V - 36V DC, suitable to control RGBW LED stripes, max. load 5A per channel	12-36	178x46x19	W	711-000705	105,00	
 IP20						

LED LIGHT SCENES CONTROLLER

INFO	V DC	BxHxT	FOR	COLOUR	CODE	EURO	STOCK
 RGBW radio controller for up to 4 zones, up to 4 scenes, speed and brightness can be adjusted, control can be mounted in standard recessed housing 68mm	12-24	86x86x10	DMX	S	711-000806	140,00	
	12-24	86x86x10	WIFI/RADIO	S	711-000606	120,00	
 IP20							


WLAN GATEWAY



INFO	V DC	BxHxT	COLOUR	CODE	EURO	STOCK
WLAN gateway, for the control of 711-000305, corresponding App EASYColor Pro available free of charge in the Appstore or Playstore integration into in-house wlan possible.	12-24	110x85x24,2	S	711-000406	105,00	


REMOTE CONTROL



INFO	LxWxH	COLOUR	CODE	EURO	STOCK
Radio remote control for up to 4 zones, up to 4 scenes, speed and brightness can be adjusted, incl. wall fixation	140x48x16	S	711-000506	135,00	


RGB LED CONTROLLER



INFO	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
2.4GHz RGBW radio controller 12-24V with touch remote control, max. scope 30m, suitable for control of RGBW LED stripes, functions via remote control: monochrome using colour wheel, white, 15 colour profiles, dimming functions (9 levels), memory function, output current max. 24A (4 x 6A)	12-24	85x45x27	W	354-con1001	95,00	


ZIGBEE 3.0 RGBW DIMMER



INFO	W	V DC	LxWxH	COLOUR	CODE	EURO	STOCK
4-channel ZigBee 3.0 dimmer for control of RGBW, RGB or white LED stripes, max. load 5A per channel, order power supply separately	240 - 720W	12-36	165x53x23	W	711-000005	130,00	


ZIGBEE 3.0 LIGHT SCENES CONTROLLER



INFO	V AC	BxHxT	COLOUR	CODE	EURO	STOCK
ZigBee 3.0 controller for up to 4 zones, up to 4 scenes, speed and brightness can be adjusted, max. 30 ZigBee dimmer, max. scope 30m on open field, control can be mounted in standard recessed housing 68mm	220-240	86x86x10	W	711-000105	120,00	

ZIGBEE 3.0 RGB REMOTE CONTROL




INFO	LxWxH	COLOUR	CODE	EURO	STOCK
ZigBee 3.0 remote control for up to 4 zones, up to 4 scenes, speed and brightness can be adjusted, max. 30 ZigBee dimmer, max. scope 30m on open field, incl. wall fixation	120x55x17	S	711-000206	100,00	




Projekt: Wohnhaus, Österreich
Foto: Molto Luce


PG CLAMP TUBE

	INFO	LxØ	COLOUR	CODE	EURO	STOCK
	Clamping tube with PG closure for waterproof cable connections, 3-pole block, only for use with cable H05SS-F, for cable diam. 7-12mm, for max. 24A/450V AC	115x26,5	<div>S</div>	102-thb391a3c	10,00	<div>👍</div>
IP68						


PG CLAMP TUBE Y-FORM

	INFO	LxWxØ	COLOUR	CODE	EURO	STOCK
	Clamping tube with PG closure for waterproof cable connections, 3-pole block, only for use with cable H05SS-F, for cable diam. 7-13,5mm, for max. 24A/450V AC	180x63x32	<div>S</div>	102-thb399a3c	17,00	<div>👍</div>
IP68						


PG KCLAMP TUBE Y-FORM

	INFO	LxWxØ	COLOUR	CODE	EURO	STOCK
	Clamping tube with PG closure for waterproof cable connections, 3-pole block, only for use with cable H05SS-F, for cable diam. 7-13,5mm, for max. 32A/450V AC	180x63x32	<div>S</div>	102-thb399d9b	29,00	<div>👍</div>
IP68						


SOCKET GU5,3

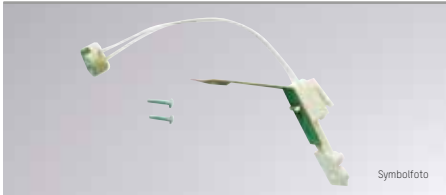 <div>Symbolfoto</div>	INFO	L	CODE	EURO	STOCK
	with clamp and strain relief	115	259-502990	2,00	<div>👍</div>
12V NV					
<div>⚡</div>					


SOCKET GU10

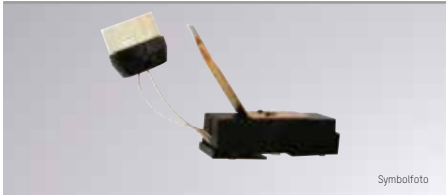
 <div>Symbolfoto</div>	INFO	CODE	EURO	STOCK
	with clamp and strain relief	259-502991	4,00	<div>👍</div>
230V HV				
<div>⚡</div>				


PACKING LED STRIPE IP20/IP66

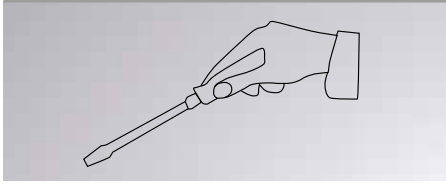
	INFO	CODE	EURO	STOCK
	LED Stripe IP20 per cut contains: cut to size, 50cm soldered connection cable, system test, ESD packing	746-konfip20	19,50	<div>👍</div>
LED Stripe IP65 per cut contains: cut to size, 50cm soldered connection cable, cut sealing with silicone protective paint, system test, ESD packing		283-konf	19,50	<div>👍</div>


LED RETROFITS


PICTURE	TYPE	WATTAGE	BEAM ANGLE	EEI	LIGHT COLOUR	SOCKET	CODE
	ST64 / Classic LED Bulb	8	>300	A+	827	E27	30-814277
	A60 / Classic LED Bulb	4,3	>300	A++	827	E27	30-808672
	A60 / Classic LED Bulb	7	>300	A++	827	E27	30-742730
	G93 / Classic LED Bulb	8	>300	A+	827	E27	30-814314


PICTURE	TYPE	WATTAGE	BEAM ANGLE	EEI	LIGHT COLOUR	SOCKET	CODE
	ST64 / Classic LED Bulb gold	8	>300	A+	820	E27	30-814352
	A60 / Classic LED Bulb gold	8	>300	A+	820	E27	30-841549
	G93 / Classic LED Bulb gold	8	>300	A+	820	E27	30-814376


PICTURE	TYPE	WATTAGE	BEAM ANGLE	EEI	LIGHT COLOUR	SOCKET	CODE
	MasterLED Bulb klar	6	>300	A+	827-822	E27	30-481288
	MasterLED Bulb klar	9	>300	A+	827-822	E27	30-481325
	Master LED Bulb	12	>300	A+	827-822	E27	30-826188
	Master LED Bulb	15,5	>300	A+	827-822	E27	30-826201

PICTURE	TYPE	WATTAGE	BEAM ANGLE	EEI	LIGHT COLOUR	SOCKET	CODE
	MasterLED Spot	6	25	A+	827	E27	30-713563
	MasterLED Spot	6	25	A+	830	E27	30-713662


PICTURE	TYPE	WATTAGE	BEAM ANGLE	EEI	LIGHT COLOUR	SOCKET	CODE
	MasterLED Spot	9,5	25	A+	827	E27	30-713808


PICTURE	TYPE	WATTAGE	BEAM ANGLE	EEI	LIGHT COLOUR	SOCKET	CODE
	MasterLED Spot	13	25	A+	827	E27	30-713761


PICTURE	TYPE	WATTAGE	BEAM ANGLE	EEI	LIGHT COLOUR	SOCKET	CODE
	B35 / Classic LED Candle	2	>300	A++	827	E14	30-574072
	P45 / Classic LED Luster	2	>300	A++	827	E14	30-574133


PICTURE	TYPE	WATTAGE	BEAM ANGLE	EEI	LIGHT COLOUR	SOCKET	CODE
	MasterLED Candle	4	>300	A+	827-822	E14	30-453681
	MasterLED Candle	6	>300	A+	827-822	E14	30-453506
	Master LED Luster	4	>300	A+	827-822	E14	30-453780
	Master LED Luster	6	>300	A+	827-822	E14	30-453582


LED RETROFITS


PICTURE	TYPE	WATTAGE	BEAM ANGLE	EEI	LIGHT COLOUR	SOCKET	CODE
	CorePro LED Spot	3,5	36	A+	827	GU10	30-752531
	CorePro LED Spot	3,5	36	A+	827	GU10	30-485941
	MasterLED Spot VLE	4	36	A+	927	GU10	30-708095
	MasterLED Spot Expert Colour	4	25	A+	930	GU10	30-707517
	MasterLED Spot Expert Colour	4	36	A+	930	GU10	30-707579
	MasterLED Spot Expert Colour	5	36	A+	927	GU10	30-708118
	MasterLED Spot Expert Colour	5,5	25	A+	930	GU10	30-707630
	MasterLED Spot Expert Colour	2	36	A+	930	GU10	30-707692
	Classic LED Spot	4,6	36	A+	827	GU10	30-752517

PICTURE	TYPE	WATTAGE	BEAM ANGLE	EEI	LIGHT COLOUR	SOCKET	CODE
	CorePro LED Spot	5	36	A+	827	GU5,3	30-710630
	MasterLED Spot VLE	5,5	36	A+	827	GU5,3	30-708231
	MasterLED Spot VLE	5,5	36	A+	830	GU5,3	30-708255
	MasterLED Spot	7	36	A+	827	GU5,3	30-815540


PICTURE	TYPE	WATTAGE	BEAM ANGLE	EEI	LIGHT COLOUR	SOCKET	CODE
	MasterLED Spot	10	24	A	827	G53	30-514887
	MasterLED Spot	10	24	A	830	G53	30-514900
	MasterLED Spot	10	40	A	827	G53	30-514924
	MasterLED Spot	10	40	A	830	G53	30-514948
	MasterLED Spot	15	24	A	827	G53	30-514962
	MasterLED Spot	15	24	A	830	G53	30-514986
	MasterLED Spot	15	40	A	827	G53	30-515006
	MasterLED Spot	15	40	A	830	G53	30-515020
	MasterLED Spot	20	24	A	827	G53	30-515044


PICTURE	TYPE	VOLT	WATTAGE	BEAM ANGLE	EEI	LIGHT COLOUR	SOCKET	CODE
	CorePro LED		2,3	>300	A++	827	G9	30-713921


PICTURE	TYPE	VOLT	WATTAGE	BEAM ANGLE	EEI	LIGHT COLOUR	SOCKET	CODE
	CorePro LED		2	>300	A++	827	G4	30-578650

PICTURE	TYPE	VOLT	WATTAGE	BEAM ANGLE	EEI	LIGHT COLOUR	SOCKET	CODE
	CorePro LED		6,5	>300	A++	830	R7s	30-522530
	CorePro LED		14	>300	A+	830	R7s	30-578797


BULBS

PICTURE	TYPE	VOLT	WATTAGE	BEAM ANGLE	EEI	LIGHT COLOUR	SOCKET	CODE
	QT14 ECO	240V	20		D	2700K	G9	28-945556
	QT14 ECO	230V	33		D	2700K	G9	28-208668
	QT14 ECO	240V	48		D	2800K	G9	28-945334
	QT14 ECO	240V	60		D	2800K	G9	28-945655

PICTURE	TYPE	VOLT	WATTAGE	BEAM ANGLE	EEI	LIGHT COLOUR	SOCKET	CODE
	QR-CBC51 ECO	12	20	36	B	3000K	GU5,3	28-620206
	QR-CBC51 ECO	12	35	36	B	3000K	GU5,3	28-516639
	QR-CBC51 ECO	12	50	36	B	3000K	GU5,3	28-516714

PICTURE	TYPE	VOLT	WATTAGE	BEAM ANGLE	EEI	LIGHT COLOUR	SOCKET	CODE
	QR-111 ECO	12	35	24	B	2900K	G53	28-656847
	QR-111 ECO	12	50	40	B	3000K	G53	28-909237

BULBS

PICTURE	TYPE	WATTAGE	BEAM ANGLE	EEI	LIGHT COLOUR	SOCKET	CODE
	T16	14	VPE 40	A+	827	G5	28-645933
	T16	14	VPE 40	A+	830	G5	28-464824
	T16	14	VPE 20	A+	830	G5	28-591520
	T16	14	VPE 40	A+	840	G5	28-464688
	T16	14	VPE 20	A+	840	G5	28-591384
	T16	21	VPE 40	A+	827	G5	28-645971
	T16	21	VPE 20	A+	827	G5	28-645957
	T16	21	VPE 40	A+	830	G5	28-464800
	T16	21	VPE 20	A+	830	G5	28-591506
	T16	21	VPE 40	A+	840	G5	28-464701
	T16	21	VPE 20	A+	840	G5	28-591407
	T16	24	VPE 20	A	827	G5	28-646077
	T16	24	VPE 40	A	830	G5	28-453491
	T16	24	VPE 20	A	830	G5	28-591667
	T16	24	VPE 40	A	840	G5	28-453477
	T16	24	VPE 20	A	840	G5	28-591643
	T16	28	VPE 40	A+	827	G5	28-646015
	T16	28	VPE 20	A+	827	G5	28-645995
	T16	28	VPE 40	A+	830	G5	28-464787
	T16	28	VPE 20	A+	830	G5	28-591483
	T16	28	VPE 40	A+	840	G5	28-464725
	T16	28	VPE 20	A+	840	G5	28-591421
	T16	35	VPE 40	A+	827	G5	28-646053
	T16	35	VPE 20	A+	827	G5	28-646039
	T16	35	VPE 40	A+	830	G5	28-464763
	T16	35	VPE 20	A+	830	G5	28-591469
	T16	35	VPE 40	A+	840	G5	28-464749
	T16	35	VPE 20	A+	840	G5	28-591445
	T16	39	VPE 40	A+	827	G5	28-646138
	T16	39	VPE 40	A+	830	G5	28-453552
	T16	39	VPE 20	A+	830	G5	28-591728
	T16	39	VPE 40	A+	840	G5	28-453538
	T16	39	VPE 20	A+	840	G5	28-591704
	T16	49	VPE 20	A+	827	G5	28-796772
	T16	49	VPE 40	A+	830	G5	28-657158
	T16	49	VPE 20	A+	830	G5	28-796758
	T16	49	VPE 40	A+	840	G5	28-657134
	T16	49	VPE 20	A+	840	G5	28-796710
	T16	54	VPE 20	A+	827	G5	28-646152
	T16	54	VPE 40	A+	830	G5	28-453415
	T16	54	VPE 20	A+	830	G5	28-591605
	T16	54	VPE 40	A+	840	G5	28-453392
	T16	54	VPE 20	A+	840	G5	28-591582
	T16	80	VPE 40	A+	827	G5	28-646213
	T16	80	VPE 40	A+	830	G5	28-515137
	T16	80	VPE 20	A+	830	G5	28-591827
	T16	80	VPE 40	A+	840	G5	28-515 151
	T16	80	VPE 20	A+	840	G5	28-591841

COLOUR RENDERING

The Colour Rendering Index (in abbreviated form called CRI) is a measurement of a light source’s accuracy in rendering different colours when compared to a reference light source with the same correlated colour temperature. The Colour Rendering Index is defined on the basis of 8 basic colours, and does not depend on the colour of light of the light source.

Premium CRI 90



PREMIUM CRI 90

Symbolic picture




STANDARD CRI 90

Symbolic picture

When evaluating standard CRI values, only the 8 standard pastel colours are rated, therefore the informative value of the CRI is not fully comprehensive. This is especially apparent in the fashion and retail sector, where saturated colours must be perfectly reproduced. The standard CRI is often not enough. For this reason, we offer Premium CRI 90 in our range. This premium CRI 90 is rated based on 14 basic colours. In addition to the 8 pastel colours there are 6 saturated colours, e.g. R9 for saturated red. Only then it is possible to render all the colours in very good quality.

BINNING

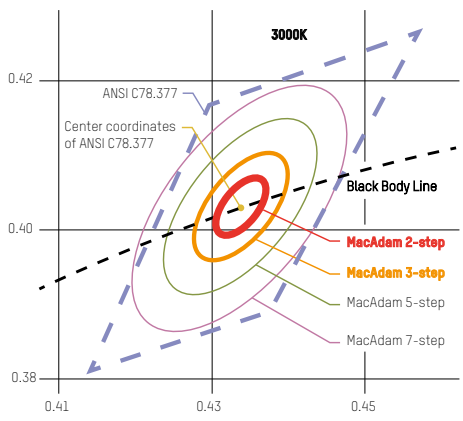

In the manufacture of LEDs, there are always small differences in the colour of the light, colour rendering and brightness of the individual LEDs. These differences would be noticeable when comparing several identical products. To avoid this, there is the so-called BINNING. Binning allows LEDs to be tested individually and separated into single groups, called BINS. A BIN contains only LEDs with the same values. This binning process is performed using the MacAdam ellipse. This ellipse defines the area where differences are not perceptible for humans. Accordingly, our products only use LEDs with MacAdam [SDCM] 3step Binning.

LUMINOUS FLUX

The projected luminous flux of the lamp is shown in consideration of all reduction factors such as temperature, reflector efficiency, safety glass transmittance value and constructive factors according to the technical data sheets and manufacturer’s instructions. The specified, calculated values in the catalogue refer to, unless otherwise specified, a reference calculation with the following specifications: 3000K CRI 80 at Ta = 25°C

POWER RATING

Only the system performance [SYS] is mentioned in the catalogue. This means the total absorbed power of LED plus the power of the Driver. Exceptions are only luminaries that are delivered without Driver, here the LED power [LED] is specified.

ENERGY LABEL

For an easier comparison of the different available light sources (it is no longer required to search product specification sheets) the following EC Energy Label is shown on each luminaire package. The reason for this new labeling is an energy regulation, which rates „considerable potential“ for saving energy for equivalent products. These Directives 2010/20 and EU Regulation 874/2012 prescribe the standardized markings. The classification is from „A++“ (high energy efficiency) to „E“ (lower energy efficiency). The energy consumption is for 1000 operating hours.



Available data at time of printing of the catalogue are partly calculated values. The lights are continuously optimized according to the latest technical development, all indicated power ratings and lumenoutputs have a tolerance of +/- 10%, updated information can be found on www.moltoluce.com and the professional lighting planning software DIALux.